

location plan 1:1250.

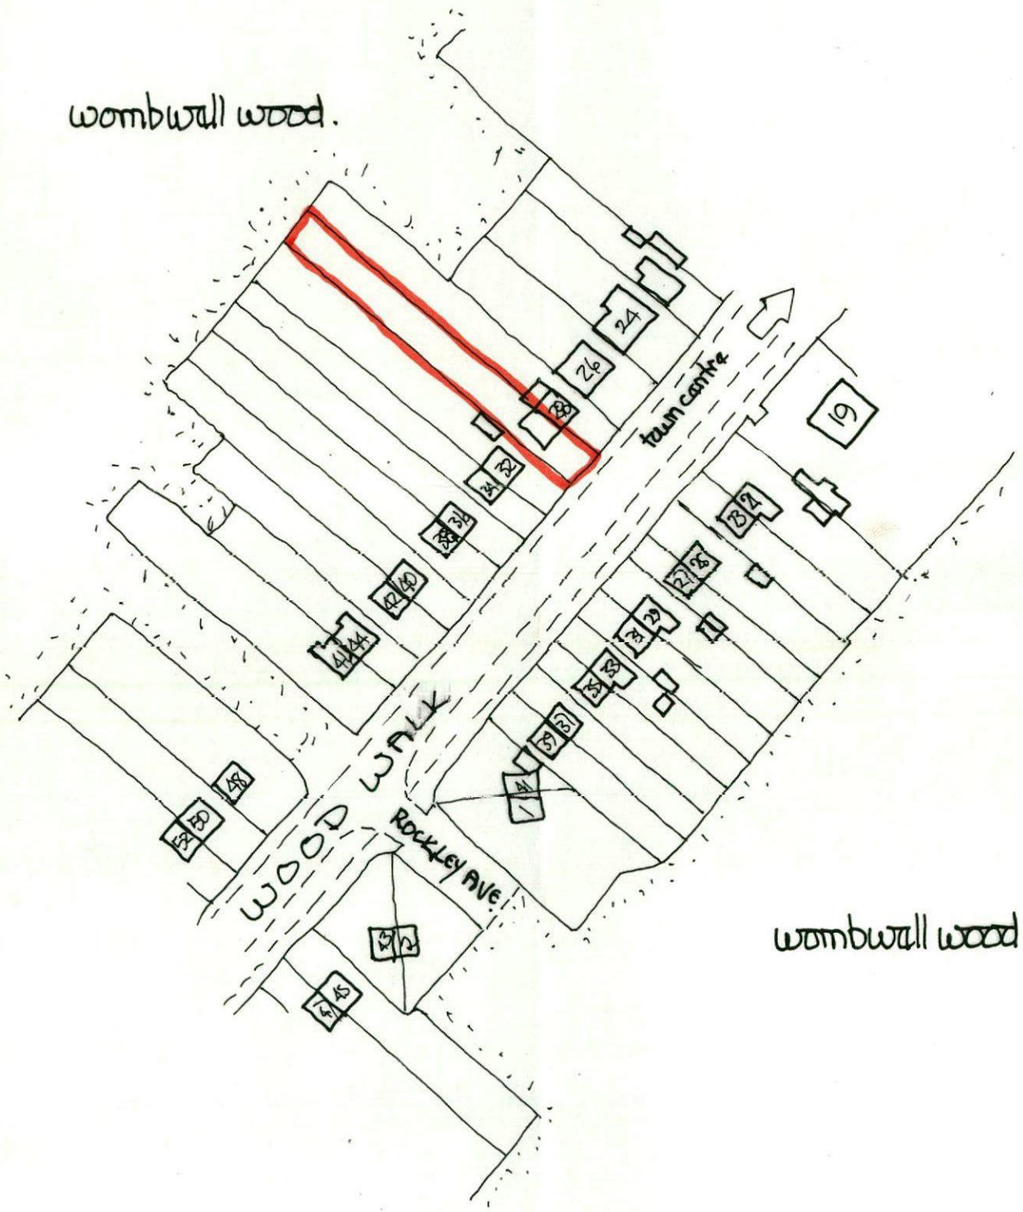


N

site plan 1:500m.

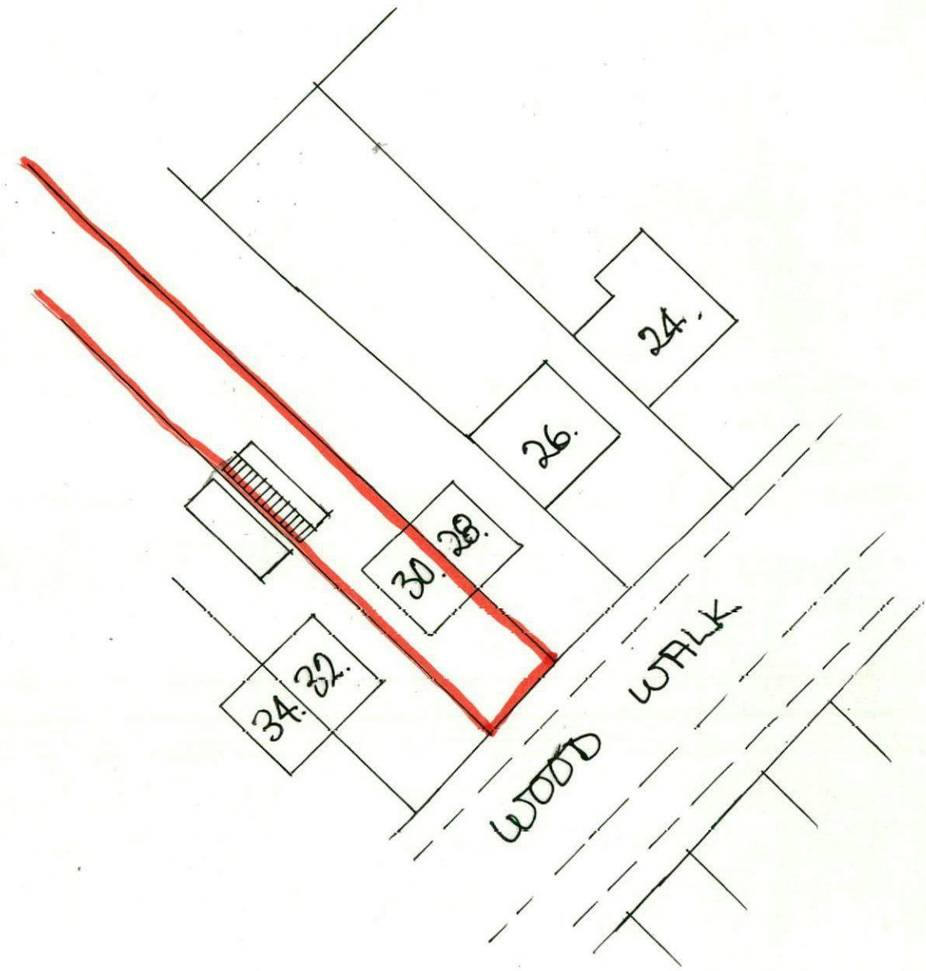


plan view - 1:50m.

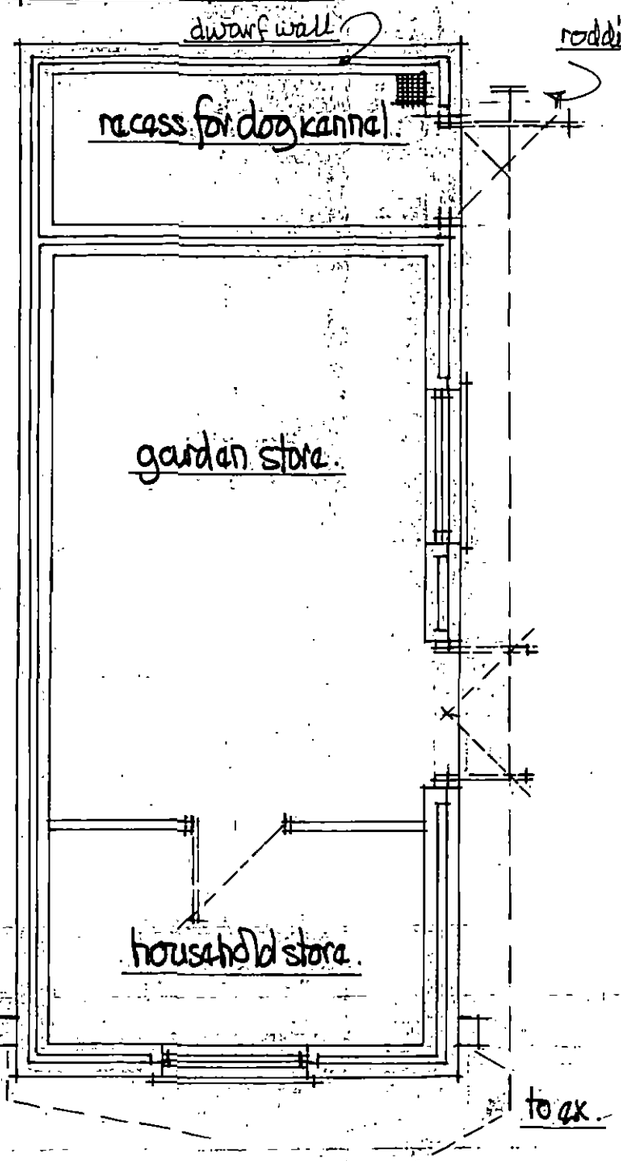

1:50m section/construction details:-

roof tiles nailed + clipped to makers spec over tanalized battens + breathable felt + 125x50x400 c/c rafters + 150x50x400 c/c ceiling ties 30x6 galv. lateral restraint straps screw nailed over 3 rafters + ceiling ties / solid nogs + fixed to block work.
upvc facia + soffit.
lintols from 1/G range. 150 cavity

100 ϕ deep flow gutter
75 ϕ fall pipes.
175x25 ridge bd.

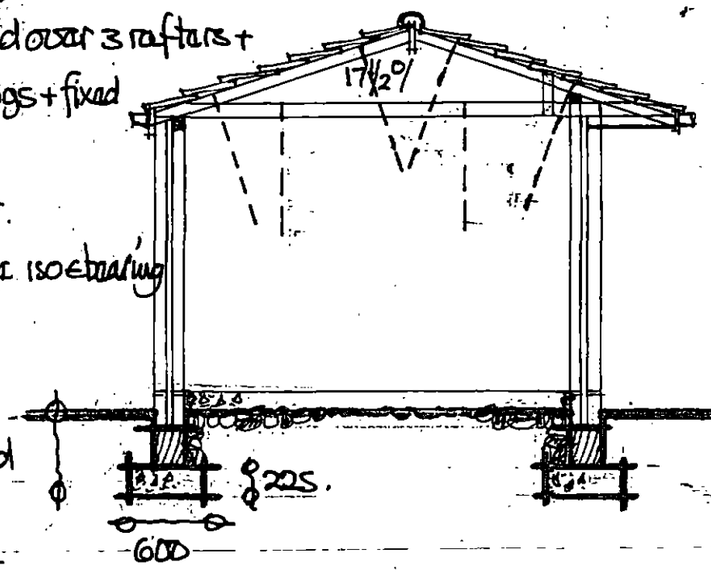


depth to be site assessed to ground conditions - use pathways for frost protection.

wall plate straps 300 c/c
matching bwk
50 cavity (insulate to clients option)
fair faced bl wk - dpc's all heads + reveals.
s/s wall ties 750 c/c H 450 c/c V
cavity bl. depth to reveals.
dpc 150 above g/ level.
125 float finish floor 1200g dpm bonded to HDPC - expansion medium to perimeter - sand blinding over 125mm clean well compact limestone.

any electrical works by a person qualified thro' a competent persons scheme who shall provide a completion certificate.


* internal wrought iron security grids to windows *

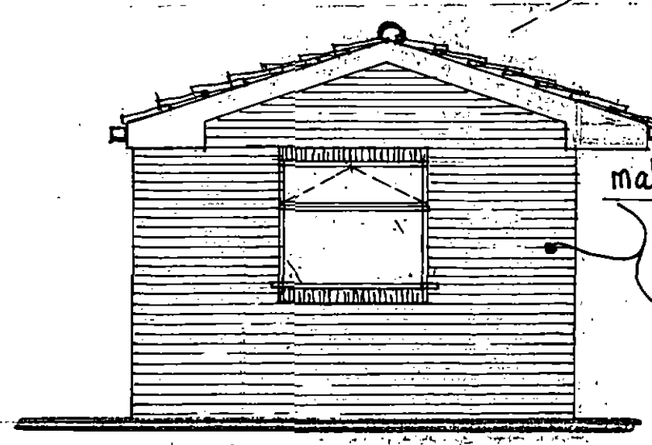


front view 1:50m.



side view from no 28.

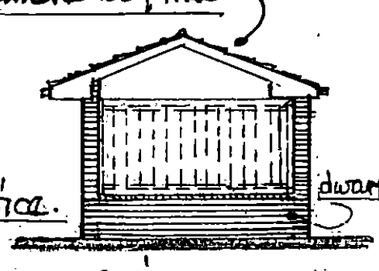

rear view.

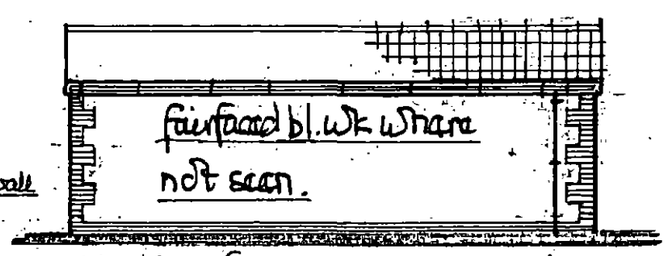

side view from no 32, scale 1:100m