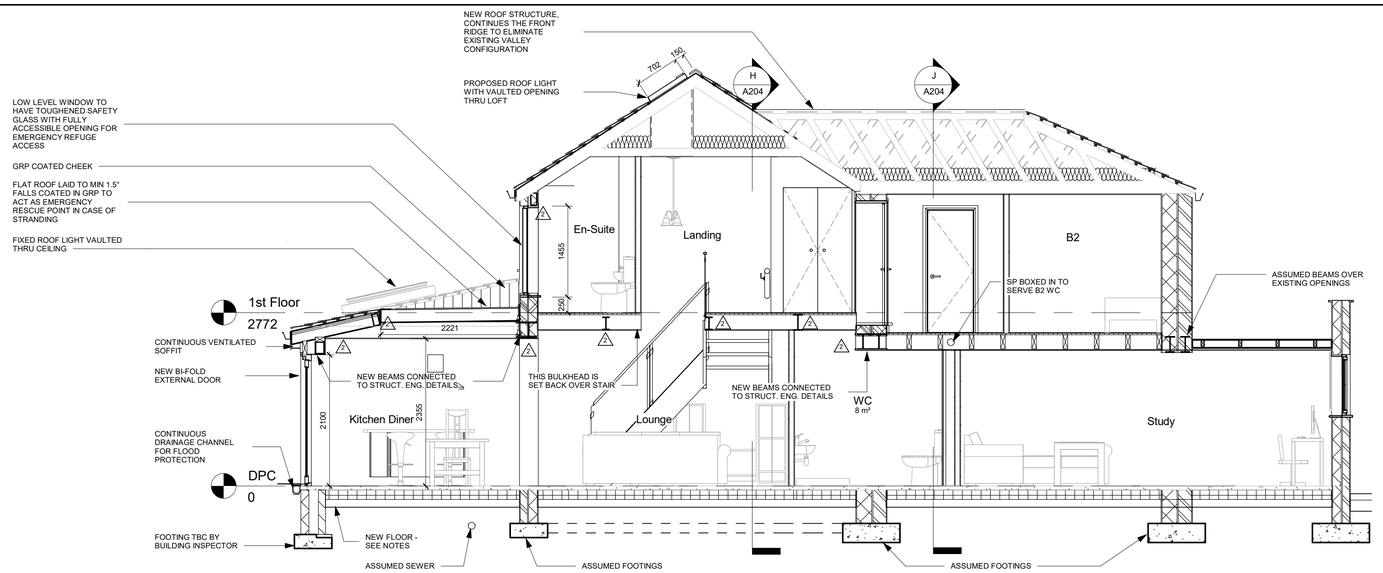

SECTION D-D
1 : 50



SECTION E-E
1 : 50

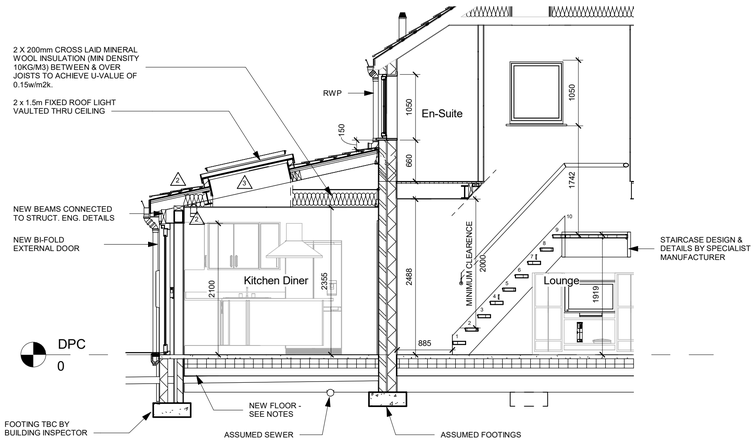

SECTION F-F
1 : 50

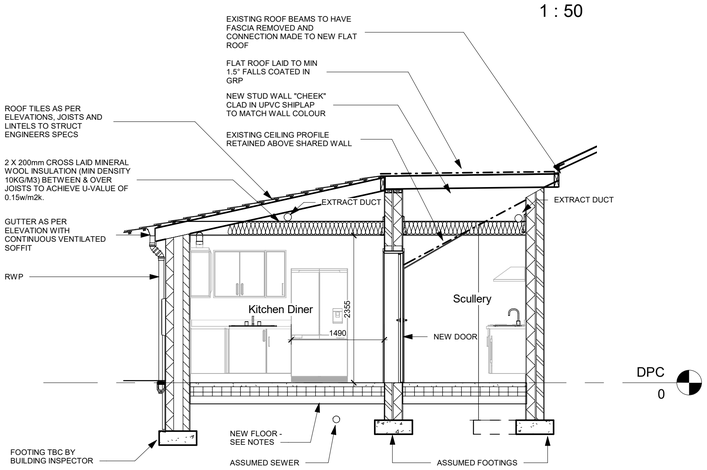

SECTION G-G
1 : 50

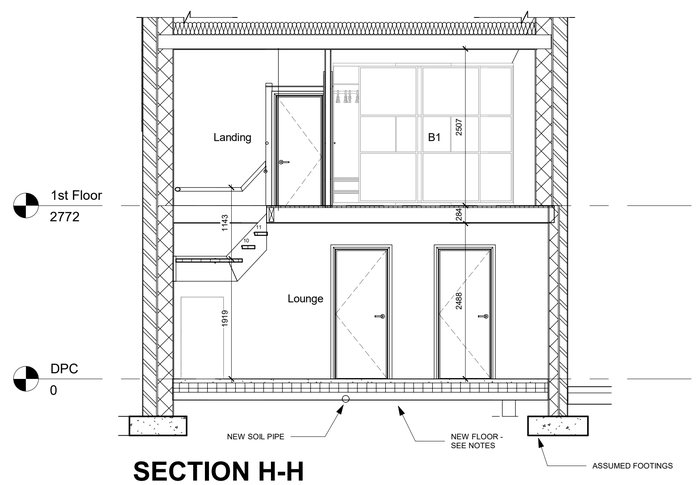

SECTION H-H
1 : 50

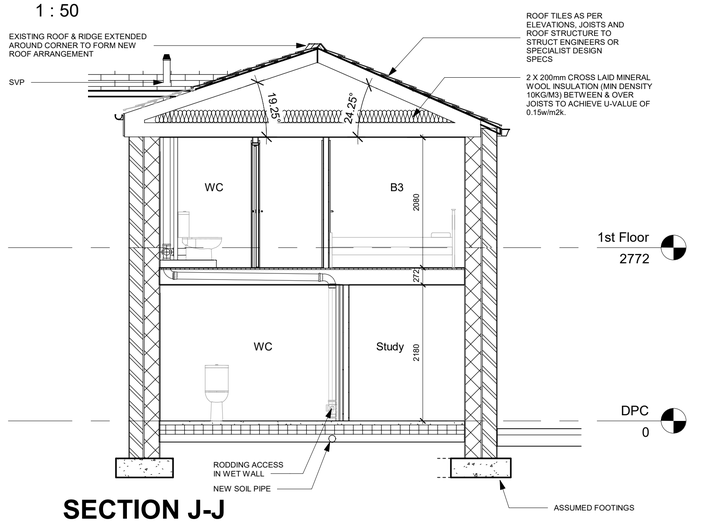

SECTION J-J
1 : 50

NOTES-

1. CHANNEL CUT INTO WALL TO ALLOW INSULATION TO CARRY THROUGH AND PREVENT COLD BRIDGE
2. LINTEL/BEAM OVER OPENING TO STRUCTURAL ENGINEER'S SPECIFICATION- SEE WF1703 DRAWINGS
3. INDICATES ROOF LIGHT OVERHEAD

WALL LEGEND.

DENOTES 395MM THICK EXTERNAL WALL:
- 10MM WHITE SCREED RENDER
- 115MM MASONRY
- 150MM WIDE CAVITY
- 100MM MASONRY
- 12.5MM GYPSUM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

DENOTES ASSUMED 300MM THICK EXTERNAL WALL:
- 10MM WHITE SCREED RENDER
- 115MM MASONRY
- 20MM WIDE CAVITY
- 140MM MASONRY
- 12.5MM GYPSUM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

DENOTES ASSUMED 500MM THICK EXTERNAL WALL:
- 10MM WHITE SCREED RENDER
- 215MM MASONRY
- 20MM WIDE CAVITY
- 240MM MASONRY
- 12.5MM GYPSUM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

DENOTES ASSUMED 300MM THICK EXTERNAL WALL:
- 125MM YORKSTONE FACING
- 20MM WIDE CAVITY
- 140MM MASONRY
- 12.5MM GYPSUM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

DENOTES ASSUMED 150MM THICK INTERNAL PARTITION WALL CONSTRUCTION
- 12.5MM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH
- 125MM MASONRY
- 12.5MM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

DENOTES 100MM THICK INTERNAL PARTITION WALL CONSTRUCTION
- 12.5MM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH
- 75MM STUD TIMBERS
- 12.5MM GYPROC WALLBOARD WITH TAPED & JOINTED FINISH

GENERAL NOTES-

- NEW LINKED MAINS OPERATED SMOKE DETECTION SYSTEM TO BE INSTALLED ON ALL FLOORS
- ALL GAS INSTALLATION /ALTERATIONS MUST BE PERFORMED COMPETENT PERSONS REGISTERED TO DO SO, THE GAS BOILER ITSELF AND THE FINAL CONNECTION OF THE WATER PIPEWORK TO THE BOILER, MUST BE DONE BY A GAS SAFE REGISTERED ENGINEER.
- ALL ELECTRICAL INSTALLATION /ALTERATIONS MUST BE PERFORMED BY A REGISTERED ENGINEER AND CONFORM TO PART P OF THE BUILDING REGULATIONS & BS 7671
- NEW FLOOR SLABS TO MEET MIN U VALUE REQUIRED OF 0.22 W/M²K SOLID GROUND FLOOR TO CONSIST OF 150MM HARDCORE. BLINDED WITH 50MM SAND BLINDING. PROVIDE 100MM GROUND BEARING SLAB CONCRETE OVER A 1200MM GAUGE DPM. DPM TO BE LAPPED IN WITH DPC IN WALLS. FLOOR TO BE INSULATED OVER A VCL ON SLAB WITH MIN 150MM THICK CELOTEX GA4000. 25MM INSULATION TO CONTINUE AROUND FLOOR PERIMETERS TO AVOID THERMAL BRIDGING.
- ALL NEW UPVC WINDOWS TO BE TRIPLE GLAZED WITH SUITABLE LINTEL OVER & INCLUDE 1200mm² TRICKLE VENTS. WINDOWS BELOW 800mm FROM AFFL ARE TO BE TOUGHENED GLASS

No.	DESCRIPTION	DATE
A	Issued for Information	26/02/24
B	Issued for Planning Permission	01/05/24
C	LA Comments	18/07/24

NORTH CONSTRUCTION: DESIGN & BUILD
from conception to completion

26 Church St.
Gawber
S.Yorks
S75 2RH

Tel: 01226 828972
Mob: 07974116241
https://bennorth60.wixsite.com/ncdb

Project Title

HAMZA LOHDI

CHANGE OF USE & REMODEL

59 CHURCH ST, DARTON. S75 5HQ

Drawing Title

Sections & Details

Scale	Drawn By	Checked By	Date
As indicated	BN	HL	18/07/24

Drawing Number: NCBD- HLD- A204 — Revision: C

THIS DRAWING IS COPYRIGHT : CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE : USE WRITTEN DIMENSIONS ONLY : ANY DISCREPANCIES MUST BE REPORTED TO DESIGN OFFICE BEFORE PROCEEDING

Original Sheet Size A1