



[STOCKISTS](#) [RESOURCES](#) [SUSTAINABILITY](#) [ABOUT](#) [CAREERS](#) |

Roofing Facades

[Home](#) [Roofing](#) [Concrete Tiles](#) [Edgemere Interlocking Slate](#)

Edgemere Interlocking Slate



[Call a specialist](#)

[Find a stockist](#)

[CAD Details](#)

[BIM Space](#)

Large format with a thin leading edge for a slate-like appearance

Advantages

[Full product details](#)

- 40% thinner than standard interlocking tiles
- Excellent covering capacity
- Can achieve an A+ rating in the BRE Green Guide to Specification*
- Accredited to the BES 6001 standard for responsible sourcing


Downloads

[Edgemere Interlocking Tiles](#)

Size: 4.84 Mb

[Colours](#) [Technical](#) [Environmental](#) [Case Studies](#)

[Fitting and Accessories](#)

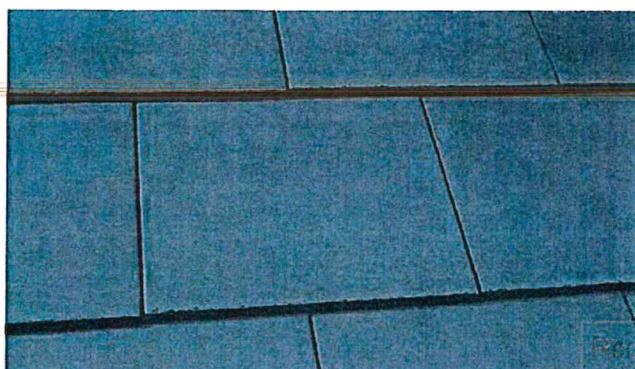

Select a colour to see more detail



Colour

Smooth Grey

[Request Sample](#)

Edgemere offers you the perfect combination: an attractive appearance at a surprisingly attractive price. The clear precise 'slate-like' appearance is enhanced by the thin leading edge and a broken-bond laying technique. At only 9.7mm thick, Edgemere is sleek and greatly increases kerb appeal, providing you with an affordable evolution from standard interlocking tiles.

With only 9.7 tiles per square metre, Edgemere is a single lap solution, that is quicker and easier to install than standard slate and is also compatible with our full range of ventilation and dry fix systems. With the ability to perform at pitches as low as 17.5°, Edgemere has the versatility to be used on a wide range of roof types.

All of our concrete interlocking tiles can achieve an 'A+' rating (the lowest environmental impact) in the Building Research Establishment's Green Guide to Specification (* element ref: 812410007, 812410018, 812410049).

Accreditation to the BES 6001 framework standard for 'Responsible Sourcing' means that projects using our concrete interlocking slates can now achieve extra credits under BREEAM and The Code for Sustainable Homes. [Click here to find out more.](#)



Edgemere is 40% thinner than standard flat interlocking tiles, dramatically improving kerb appeal with a more slate-like appearance.

Please note The British Standard for Slating and Tiling (BS 5534) has recently been updated, making significant changes to tile fixing requirements. To ensure that your roof is compliant to the new standard, our fixing specification service is available and can be accessed by clicking [here](#)

* element ref: 812410007, 812410018, 812410049

BIM Downloads

[The Edgemere Range](#)

Size: 8.00 Mb

