

SUB-STRUCTURE & GROUND FLOOR

Strip foundations 750 mm wide 225 deep 21 n/mm²
OPC concrete taken down to firm bearing strata to satisfaction of the BOD min 600 deep. Blockwork below ground level to be 2 skins of 100 mm 7N/mm² with 100mm cavity filled with weak mix conc.to G.L.Note:width of blkwk. skin to equal the thickness of the leaves proposed above.150mm consolidated hardcore with 25 sandblinding 1200 gauge polythene dpm lapped onto wall dpm min 150 above gl 100 mm Kingspan TP10/TP70 insulation. 125 mm 21N/mm² concrete floor with smooth trowelled finish. Excavation to be backfilled to inside with clean consolidated hardcore compacted in max.225mm layers.Backfilling to outside to be with selected as-dug material(up to 350mm below G.L.if in garden areas)or hardcore as before(if hardsurfaced areas).

TRUSSED ROOF

Roof tiles to match existing on 25 x 38 s.w. treated battens on untearable roofing felt.
New roof of trussed construction to manufacturers details and design.To BS 5268 Pt 3 @ 600mm ctrs.
@400mm ctrs.truss clips used to fix trusses—two per truss 100 x 25 sw bracing diagonallyand at each node point horizontally and sloping. 100 x 50 (or to suit int. leaf thickness) sw wall plate bedded onto blockwork below.
225x25 Cellulose Specifier range PVC-u.fascia board with 10mm PVC-u soffit fitted with soffit vent.Vent to allow a continuous ventilated strip of 25mm width protected with a flyproof mesh.
1000x40x6mm galvanised restraint strips to gables at 1500mm ctrs measured along the roof slope with ties at 1500mm ctrs at ceiling level.
300mm glassfibre insulating quilt laid between trusses (2 layers 150mm opposing) 100mm half round PVC gutter to 65mm PVC downpipe.

1500mm long lateral restraint straps to be fixed as above at ceiling level. All lateral restraint straps are to be provided with noggins between members to which they are fixed @ 1500mm ctrs.
12.5mm plasterboard and skim to ceiling—see note re bathroom plasterwork. breathable felt triple layered with Onduline underlayment to makers instructions.

This project may require a methane barrier to comply with current legislation. This is recommended,but may not be obligatory.Client or his builder to check local conditions with the Local Authority at the time of construction. A suitable type would be Monarflex RAC. It is to be bonded across cavity to all outside faces of walls and sealed around services and penetrations.

WALLS

Inner leaf of thermalite lightweight aggregate blocks or other approved generally bedded Class 'N' beneath gardens etc. Where drains pass through walls they are to be lintoled over with PCC lintols.Where drains pass within 1.0m of a foundation and run parallel to it then they are to be a max of 1.0m deep.If drains are deeper than they are to be protected by bedding and surrounding in concrete up to the underside of the foundation.
Drains generally are to be laid at a fall of 1:40 or strictly in accordance with the manufacturers instructions—depending on size of pipe.

SAFETY GLASS

All door glass below 1500mm and window glass below 800mm from floor level is to be laminated or toughened in accordance with BS 6202:1981
GAS APPLIANCES — PRECAUTIONS
The builder is to ensure that the new construction and/or alteration does not enclose or interfere with an existing gas flue or terminal. A similar check is to be made on the terminals of neighbouring properties. No essential ventilation is to be blocked or removed which may affect the operation or safety of any gas appliance. If in doubt, a CORGI registered installer is to be employed to check the safety of gas appliances. Failure to comply with these recommendations could result in death.
WINDOWS IN DWELLINGS
All windows are to be glazed with Low Emmissivity glass to achieve a U-value of 1.4W/m²K. An opening min 450mm wide and 750mm min high is to be provided with the bottom of the opening not more than 1100mm above FFL. Any habitable room is to have an opening light min area of 1/20th of the room floor area and have trickle ventilators min 8000mm² (kitchens, utility and bathrooms 4000mm²).

The electrical contractor must be registered under the 'Competent Person Scheme' and will be required to provide a full certification for design inspection and testing of all electrical works carried out.
SMOKE DETECTORS
Smoke Detectors are to be provided to the following:—
—In every bedroom that is either formed or altered by the works in every hallway or lobby or connecting corridor that is formed by the works.
Rate of Rise Heat Detectors are to be provided to every kitchen that is either altered or formed by the works.
—NOTE In the case of smoke and heat detectors, these are to be of a mains wired-in type and if more than one, they are to be linked so as to sound if any detector is activated.

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE SCHEDULE OF WORKS REFERRED TO AND EACH ARE COMPLEMENTARY TO ONE ANOTHER. IT IS THE CONTRACTORS RESPONSIBILITY TO CHECK THAT HE HAS ALLOWED IN HIS TENDER FOR ALL ITEMS INCLUDED ON THIS DRAWING AND IN THE TEXT SECTION OF THE DOCUMENT WHETHER OR NOT SUCH ITEMS APPEAR INDIVIDUALLY IN THE SCOPE OF THE WORKS SECTION. THE TENDERER IS DEEMED TO HAVE ALLOWED FOR SUCH ITEMS IN THE TENDERED QUOTATION.

FIRE PROTECTION TO STEELWORK

steel beams to be encased in 2 layers of 12.5mm plasterboard & skim with 1.6mm wire binding at 100mm cts.

DRAINS BENEATH FOUNDATIONS

All foundations to be taken down below invert of sewer & wall bridged over using precast concrete lintels.

DRAINS

New drains to be Hepworth 'Supersleeve' or other approved generally bedded Class 'N' beneath gardens etc. Where drains pass through walls they are to be lintoled over with PCC lintols.Where drains pass within 1.0m of a foundation and run parallel to it then they are to be a max of 1.0m deep.If drains are deeper than they are to be protected by bedding and surrounding in concrete up to the underside of the foundation.
Drains generally are to be laid at a fall of 1:40 or strictly in accordance with the manufacturers instructions—depending on size of pipe.

WALLS

Inner leaf of thermalite lightweight aggregate blocks or other approved with outer leaf of 102mm facing bricks.100mm filled cavity (Rockwool RW6) formed between leaves.Stainless steel wall ties 750 horizontally 450 vertically and every block at reveals. OPC to all heads, chills and jambs and above lintels. OPC min 150 above outside ground level as indicated on the plan. Lintels to have min end bearing of 150 mm. internal walls to be 100 mm lightweight aggregate concrete blockwork with plastered and tiled finish and built off foundations.
Where appropriate internal walls to be taken to underside of roof covering & fire stopped.

New walls attached to existing—min 3 courses in every 6 or use mechanical means.Cavities to be maintained where applicable.

New S.& V.P. to be connected to new drains & taken 900mm above opening window with anti bird nest cage on top.

No part of foundation or gutter to overhang boundary line unless written permission is deposited with building control prior to work commencing.

SAFETY GLASS

All door glass below 1500mm and window glass below 800mm from floor level is to be laminated or toughened in accordance with BS 6202:1981

GAS APPLIANCES — PRECAUTIONS

The builder is to ensure that the new construction and/or alteration does not enclose or interfere with an existing gas flue or terminal. A similar check is to be made on the terminals of neighbouring properties. No essential ventilation is to be blocked or removed which may affect the operation or safety of any gas appliance. If in doubt, a CORGI registered installer is to be employed to check the safety of gas appliances. Failure to comply with these recommendations could result in death.

WINDOWS IN DWELLINGS

All windows are to be glazed with Low Emmissivity glass to achieve a U-value of 1.4W/m²K. An opening min 450mm wide and 750mm min high is to be provided with the bottom of the opening not more than 1100mm above FFL. Any habitable room is to have an opening light min area of 1/20th of the room floor area and have trickle ventilators min 8000mm² (kitchens, utility and bathrooms 4000mm²).

The electrical contractor must be registered under the 'Competent Person Scheme' and will be required to provide a full certification for design inspection and testing of all electrical works carried out.

SMOKE DETECTORS

Smoke Detectors are to be provided to the following:—
—In every bedroom that is either formed or altered by the works in every hallway or lobby or connecting corridor that is formed by the works.
Rate of Rise Heat Detectors are to be provided to every kitchen that is either altered or formed by the works.
—NOTE In the case of smoke and heat detectors, these are to be of a mains wired-in type and if more than one, they are to be linked so as to sound if any detector is activated.

BMBC environmental services to ensure adequacy of design and positioning of the new development in relation to boundaries and ownership.

Actual depth of foundations to be determined on site.
All work to be to the satisfaction of the local authority.
All dimensions to be checked on site and any discrepancies must be notified immediately
All dimensions are in millimetres unless otherwise stated.
Information given on this drawing is subject to local authority approval.
Do not scale this drawing.

VINE PROJECTS & DESIGN

3 WILLOW BANK, BARNESLEY SOUTH YORKSHIRE S19 1BN

M:- 07973 265850

E-mail: vineprojects@aol.com

CLIENT

Jordan Stevenson


17 Mount Pleasant, Grimethorpe

PROJECT


Formation of bedroom

FILE NAME	DWG No	SCALE	DATE	DRAWN	REV.
jordan_stevenson_01.dwg	5610/01	1:100 1:50	04/2017	jjb	


EXISTING SIDE ELEVATION

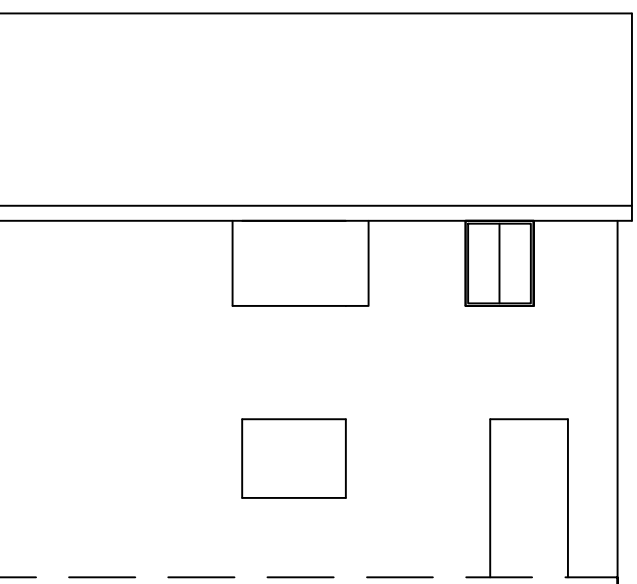


EXISTING REAR ELEVATION

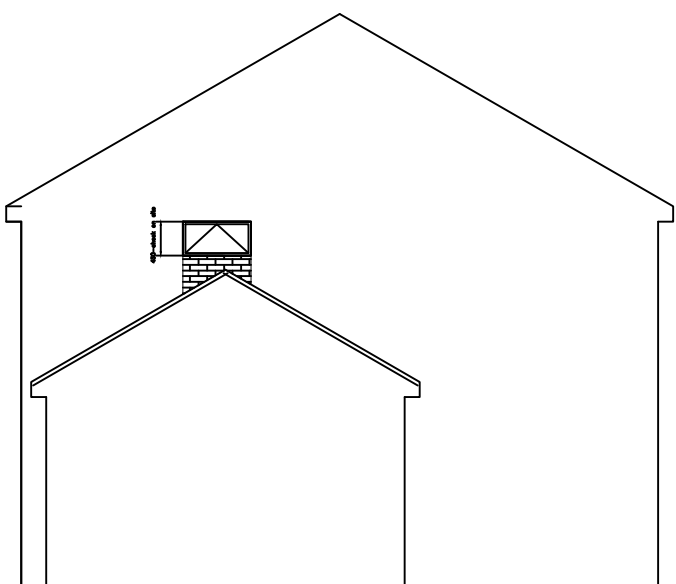

PROPOSED SIDE ELEVATION

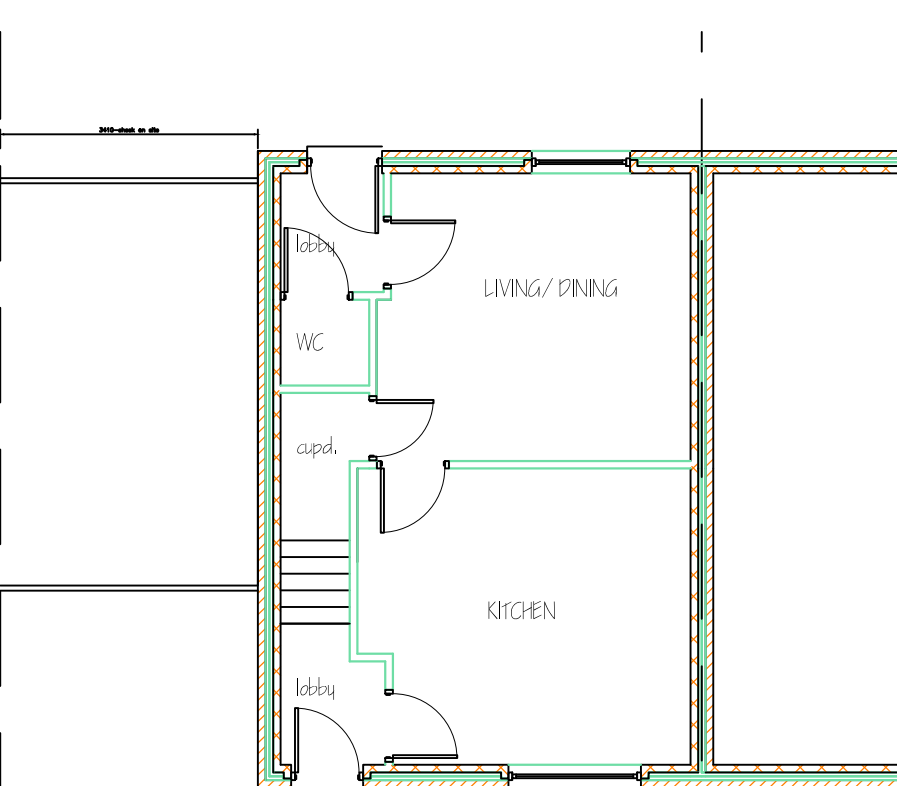


EXISTING GF PLAN

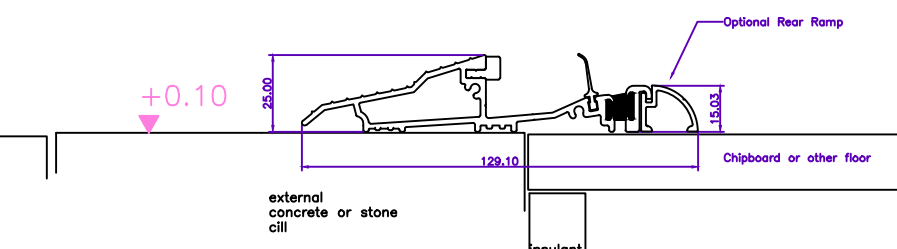


TYPICAL THRESHOLD DETAIL
(Using Stormguard Proline AM3 Cill)

PROPOSED REAR ELEVATION

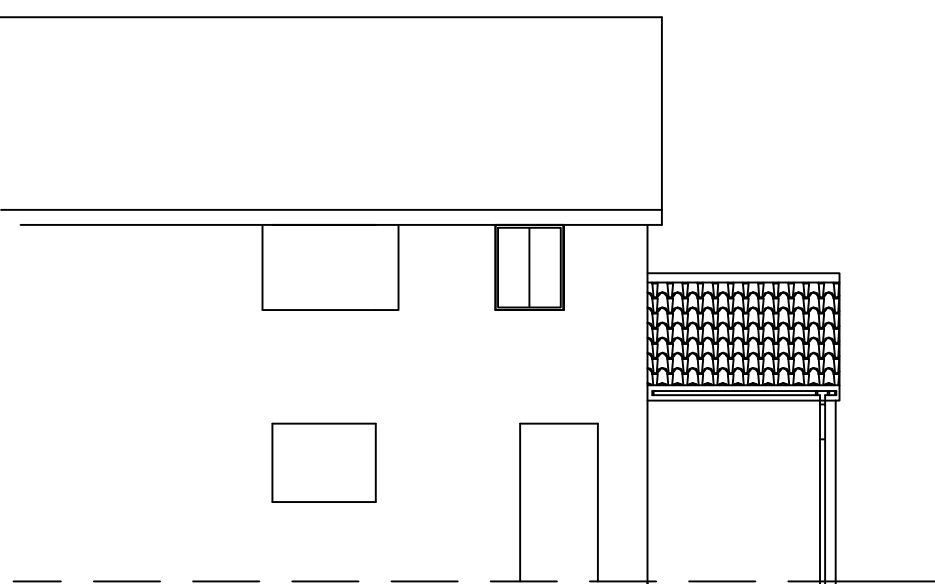

SECTION (typical)

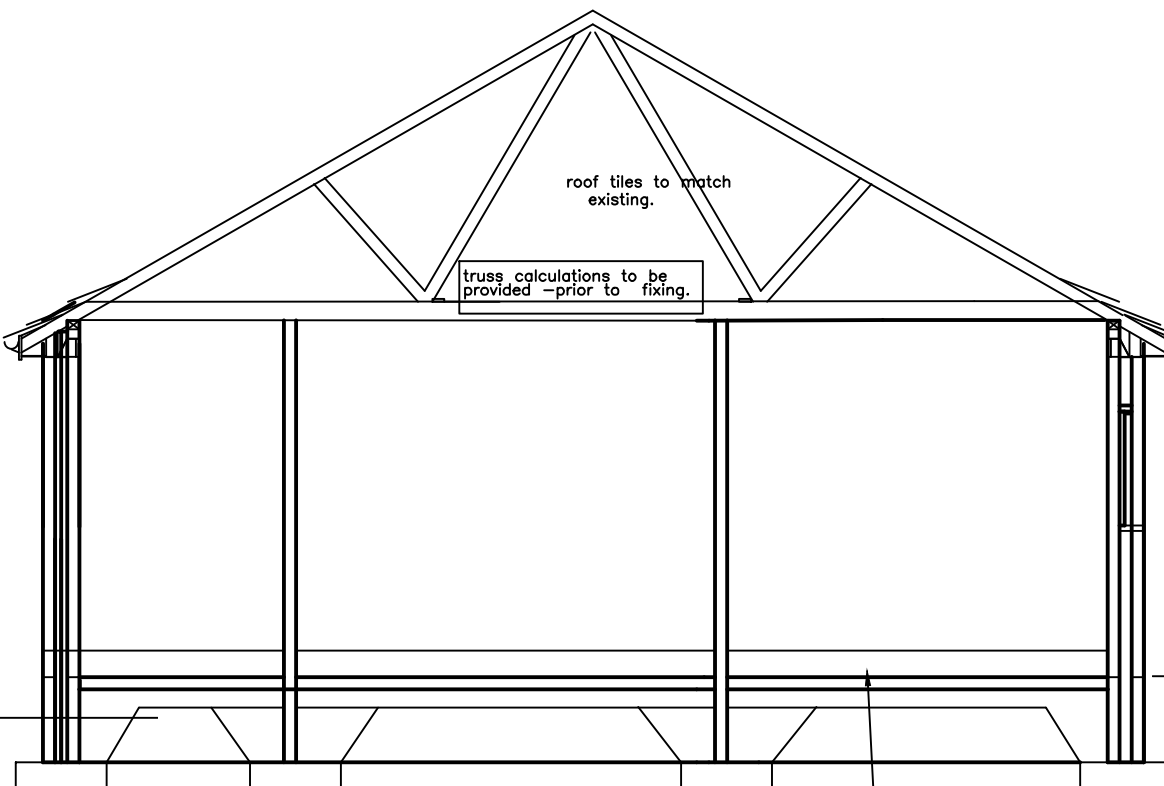

PROPOSED FRONT ELEVATION

