Marley

# Roofing

## PRODUCT CATALOGUE

NOVEMBER 2018



# Marley's extensive range of tiles, dry fix products, ventilation systems and accessories has been successfully enhancing and protecting our roofs for over 100 years.

We want to make your project, or that of your client, as straightforward and successful as possible, so we're on hand to offer practical, experienced support in a range of useful ways.

This can be delivering urgent samples where and when they're needed, providing products that help you achieve an A+ rating and gain credits for your buildings, supplying bespoke fixing specifications, offering complete dry fixed ventilation solutions and much more.

In short, we're here to support you in any way we can and we're always happy to take some of the load off your shoulders.

Trust Marley to take the hassle out of roofing. If you ever need advice on any roofing related issue, you can rely on our team to give you a helping hand.

All factories certified to ISO 9001, ISO 14001, OHSAS 18001



## CONTENTS


4 THE MARLEY ROOF SYSTEM

### BASE LAYERS

6 UNIVERSAL UNDERLAYS
7 JB RED BATTENS

### ROOF COVERINGS

8 PRODUCT SELECTOR
10 CLAY PLAIN TILES & FITTINGS
19 CLAY INTERLOCKING TILES & FITTINGS
25 CONCRETE PLAIN TILES & FITTINGS
28 CONCRETE INTERLOCKING TILES & FITTINGS
43 SHINGLES
46 FIXINGS

### DETAILING

50 DRY FIX & VENTILATION SYSTEM SELECTOR
52 UNIVERSAL ROOFING ACCESSORIES
56 DRY FIX AND VENTILATION

### KNOWLEDGE

61 HERE TO HELP
62 MINIUMUM BANDED QUANTITIES
63 MANUFACTURING & STOCKING LOCATIONS


# Tell me more

Call 01283 722588
Email info@marley.co.uk
Or visit marley.co.uk

# THE MARLEY ROOF SYSTEM

We offer the most comprehensive roof system on the market, underwritten by a 15 year warranty.






So many elements offered by one supplier, give levels of accountability and integration that reduce design and installation liability. More elements guaranteed to work seamlessly together, give you more time to focus on design and management of your project, complete peace of mind and, of course, better, more durable, lower maintenance roofs.

- Base layers
- Detailing
- Confidence
- Roof coverings
- Knowledge

# UNIVERSAL UNDERLAYS

Marley Universal Vapour Permeable and Non-Breathable underlays are high performance roof membranes which are zone 1-5 compliant, in accordance with BS 5534.

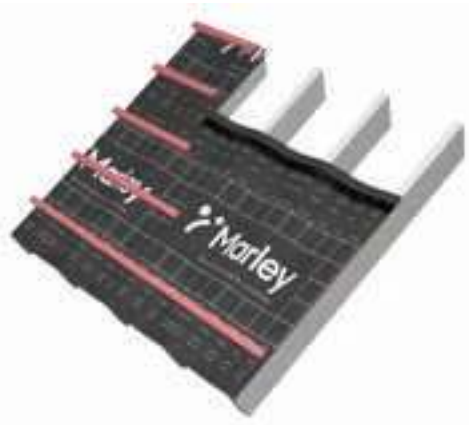


## UNIVERSAL VAPOUR PERMEABLE UNDERLAY

- Vapour permeable
- High tensile and tear strength
- Clean and easy to handle
- Durable
- UV resistant
- BBA approved – certificate no. 18/5521
- Integrated tape for sealing laps
- Guidance lines for minimum laps
- Suitable for vertical applications

## UNIVERSAL NON-BREATHABLE UNDERLAY

- Non-breathable
- High tensile and tear strength
- Clean and easy to handle
- Durable
- UV resistant
- BBA approved – certificate no. 18/5519
- Lightweight alternative to traditional IF
- Integrated tape for sealing laps
- Guidance lines for minimum laps

# JB RED BATTENS

JB Red is a high quality roofing batten and the first fully pre-graded batten available to the roofing industry.




## BENEFITS OF JB RED

- Pre-graded to all strength requirements of BS 5534 for roofing battens
- UKAS third party assessed by the BBA
- LABC registered and is approved for use by local authorities
- Manufactured from slow grown, high grade timber
- FSC® or PEFC™ certified
- Preservative treated BS 8417 Usage Class 2 using MicroPro® against wood rotting fungi and insect attack
- 60 year lifetime guarantee against insect attack and wood rotting fungi (when installed correctly in accordance with the requirements of Usage Class 2)

# PRODUCT SELECTOR

## CLAY PLAIN TILES







| | CANTERBURY | ASHDOWNE | HAWKINS | ACME DOUBLE CAMBER | ACME SINGLE CAMBER |
|---|---|---|---|---|---|
| Features | Handmade Single camber | Handcrafted Single camber | Machine-made Single camber | Machine-made Double camber | Machine-made Single camber |
| Size | 265 x 165mm | 265 x 165mm | 265 x 165mm | 265 x 165mm | 265 x 165mm |
| Min. pitch | 40° | 35° | 30° | 35° | 30° |
| Max. pitch | 90° | 90° | 90° | 90° | 90° |
| No. of colours | 3 | 2 | 5 | 7 | 8 |
| Page | 11 | 12 | 13 | 14 | 15 |

## CLAY INTERLOCKING TILES





| | LINCOLN | MELODIE | MAXIMA |
|---|---|---|---|
| Features | Clay pantile Open gauge | Clay pantile Flexible gauge | Clay Double Roman Open gauge |
| Size | 370 x 247mm | 440 x 255mm | 403 x 333mm |
| Min. pitch | 17.5° | 12.5° | 17.5° |
| Max. pitch | 70° | 70° | 70° |
| No. of colours | 2 | 2 | 2 |
| Page | 20 | 22 | 24 |

## CONCRETE PLAIN TILES




| | PLAIN |
|---|---|
| Features | Cross camber |
| Size | 267 x 168mm |
| Min. pitch | 35° |
| Max. pitch | 90° |
| No. of colours | 9 |
| Page | 26 |

## SHINGLES & SHAKES





| | SHINGLES | SHAKES |
|---|---|---|
| Features | Machine-cut | Hand split |
| Size | Various | Various |
| Min. pitch | 14° | 20° |
| Max. pitch | 90° | 90° |
| No. of colours | 1 | 1 |
| Page | 44 | 45 |

## CONCRETE INTERLOCKING TILES

| |  EDGEMERE RANGE |  MODERN DUO MODERN |  DOUBLE ROMAN |  MENDIP |  LUDLOW MAJOR |
|---|---|---|---|---|---|
| Features | Thin leading edge Duo replicates smaller format slates | Flat appearance Duo replicates smaller format slates | Traditional profile | Double pantile | Simple, strong lines Ideal for refurbishment |
| Size | 420 x 330mm | 420 x 330mm | 420 x 330mm | 420 x 330mm | 420 x 330mm |
| Minimum pitch | 17.5° | 17.5° (Smooth) | 22.5° (Smooth) | 15° (Smooth) | 22.5° (Smooth) |
| Maximum pitch | 90° | 90° | 90° | 90° | 90° |
| No. of colours | 4, 3, 2, 1 | 6, 2 | 7 | 7 | 7 |
| Page | 29-31 | 32-33 | 34 | 35 | 36 |

| |  ECOLOGIC LUDLOW MAJOR |  LUDLOW PLUS |  WESSEX |  ANGLIA |  ASHMORE |
|---|---|---|---|---|---|
| Features | High level of recycled aggregate Absorbs NOx | Small format Ideal for refurbishment | Clean lines Water shedding efficiency | Bullnose leading edge Classic pantile | Interlocking double plain tile |
| Size | 420 x 330mm | 387 x 229mm | 420 x 330mm | 387 x 230mm | 267 x 333mm |
| Minimum pitch | 30° | 22.5° | 15° | 25° (Smooth) | 22.5° |
| Maximum pitch | 90° | 90° | 44° | 90° | 90° |
| No. of colours | 1 | 6 | 2 | 3 | 3 |
| Page | 37 | 38 | 39 | 40 | 41 |

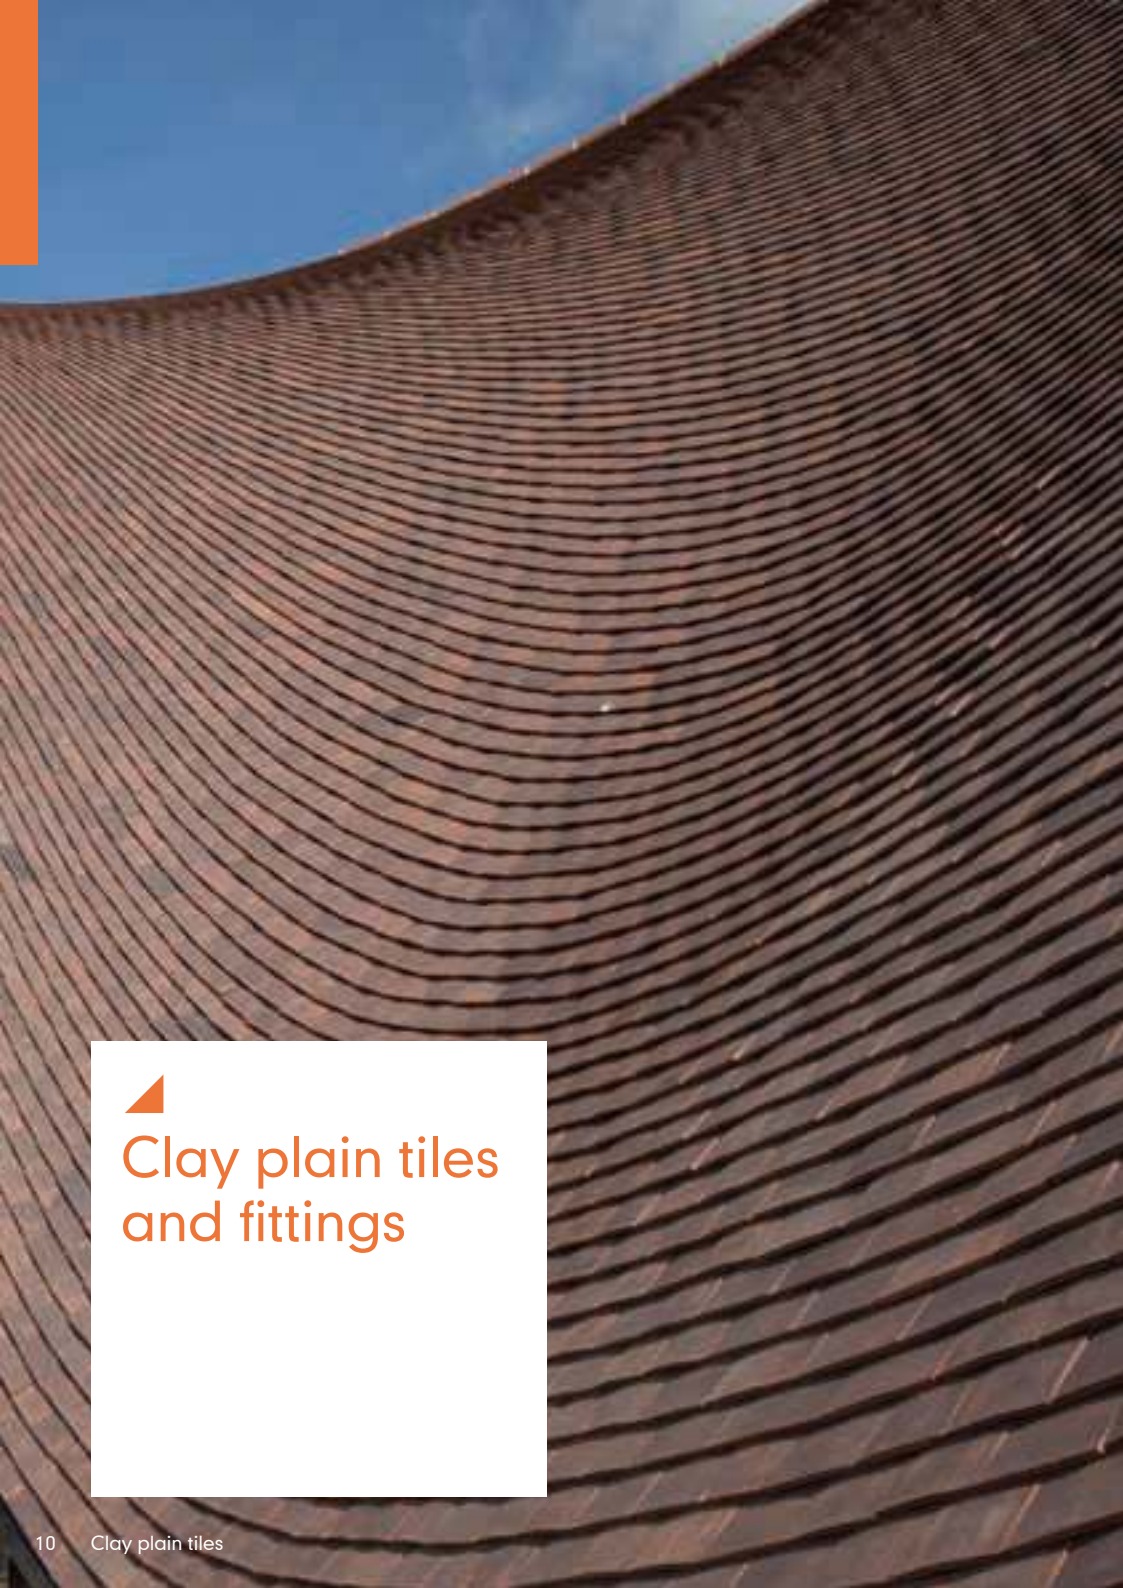


# Clay plain tiles and fittings

# CANTERBURY HANDMADE

True to tradition, a range of three distinctive handmade clay plain tile colours, with a fine sanded finish suitable for roofing and vertical tiling.



## COLOUR AVAILABILITY










Key
(F) Fine sanded finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 265mm x 165mm | |
| Minimum pitch* | 40° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 35mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 13mm (nominal) | |
| Cover width | 165mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 74kg/m² (0.73 kN/m²) at 100mm gauge (roof) | 66kg/m² (0.64 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 1304 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

Tile camber
Single camber



Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order


Club†


Bullnose†

# ASHDOWNE

Handcrafted clay plain tiles offer a warm, mellow appearance, with a granular texture and slight random irregularities that make each tile unique.



## COLOUR AVAILABILITY


Aylesham Mix (F)


Ashurst (F)

Key
(F) Fine sanded finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 265mm x 165mm | |
| Minimum pitch* | 35° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 35mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 11mm (nominal) | |
| Cover width | 165mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 65kg/m² (0.64 kN/m²) at 100mm gauge (roof) | 57kg/m² (0.56 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 1304 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

Tile camber
Single camber



Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order


Club†



Bullnose†


# HAWKINS


Single cambered (longitudinal), machine-made clay tile, manufactured for over 150 years. This heritage, combined with modern firing techniques, gives a traditional colour range.



## COLOUR AVAILABILITY





Key
(F) Fine sanded finish
(S) Smooth finish
(T) Textured finish




## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 265mm x 165mm | |
| Minimum pitch* | 30° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 35mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 11mm (nominal) | |
| Cover width | 165mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 64kg/m² (0.63 kN/m²) at 100mm gauge (roof) | 56kg/m² (0.55 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 1304 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

Tile camber
Single camber



Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order


Club†



Bullnose†


# ACME DOUBLE CAMBER

Natural clay, machine-made plain tiles with longitudinal and latitudinal camber are able to create highly textured roofscapes with accentuated light and shade.




## COLOUR AVAILABILITY

















Key
(F) Fine sanded finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 265mm x 165mm | |
| Minimum pitch* | 35° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 35mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 11mm (nominal) | |
| Cover width | 165mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 64kg/m² (0.63 kN/m²) at 100mm gauge (roof) | 56kg/m² (0.55 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 1304 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified


## PRODUCT INFORMATION

Tile camber
Double camber



Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order


Club†


Bullnose†


# ACME SINGLE CAMBER


Natural clay, machine-made, single cambered (longitudinal) plain tiles, offering crisp, contemporary lines and the warmth and character of clay at an affordable price.



## COLOUR AVAILABILITY

















Key (F) Fine sanded finish (S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 265mm x 165mm | |
| Minimum pitch* | 30° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 35mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 11mm (nominal) | |
| Cover width | 165mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 64kg/m² (0.63 kN/m²) at 100mm gauge (roof) | 56kg/m² (0.55 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 1304 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

Tile camber
Single camber



Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†


Bullnose†

# CLAY FITTINGS & ACCESSORIES

Important note: All the fittings shown on these pages can be used with clay plain tiles, but should not be used on rafter pitches below 35° with Acme double camber or Ashdowne handcrafted clay plain tiles.


## PLAIN TILE FITTINGS

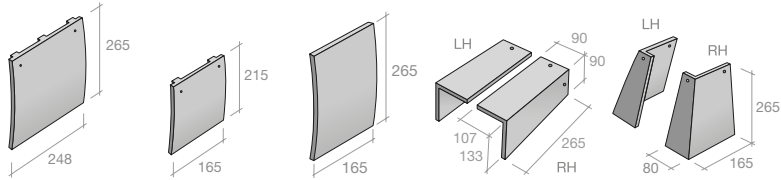


| Description | Tile-and-a-half | Eaves/top tile | Creasing tiles§ | Cloaked verge tiles* | External angle tiles |
|---|---|---|---|---|---|
| Angles available | n/a | n/a | n/a | n/a | 90°, 135° |

## FEATURE TILES

Available in a range of colours, please contact customer services for more information.

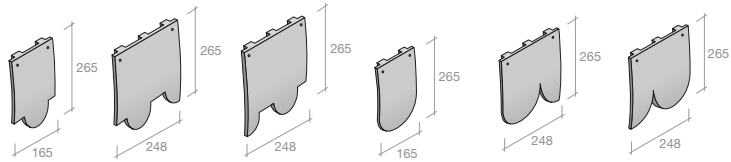


| Description | Club feature tile* | RH club tile-and-a-half* | LH club tile-and-a-half* | Bullnose feature tile* | RH bullnose tile-and-a-half* | LH bullnose tile-and-a-half* |
|---|---|---|---|---|---|---|

## HIPS AND VALLEYS


Mortar bedded security hip kits are available for third round ridges (see page 48)




| Description | Granny hip | Semi bonnet hip | Arris hip** | Valley** |
|---|---|---|---|---|
| Angles available | n/a | n/a | 130°, 135°, 145° | 130°, 135°, 140°, 145°, 150° |
| Pitch range | 40-60° | 30-40° | 30-45° | 30-50° |

## VENTILATION

Available in a range of bases with real clay tile slips on the visible edge (3 tiles wide). The clay tile vent provides a net ventilation area of 7,500mm² per vent. Suitable for natural, mechanical or soil pipe ventilation.




















| Description | Clay in-line tile vent | Tile vent adaptor | Flexible pipe |
|---|---|---|---|

Note: All measurements in mm.

## RIDGE AND HIP TILES

Mortar bedded security ridge kits are available (see page 48)

| | | | | |
|---|---|---|---|---|
| |  |  |  |  |
| Description | Half round ridge | Half round ridge hip end* | Half round ridge stop end* | Mono ridge* |
| Angles available | n/a | n/a | 130°, 135°, 145° | 130°, 135°, 140°, 145°, 150° |
| Colours available | All colours | All colours | All colours | All colours |
| Pitch range | 30-50° | 30-50° | 30-50° | 30-45° |
| |  |  |  |  |
| Description | Hogs back ridge** | 305mm Angular ridge** | 305mm Angular ridge stop end* | 305mm Angular ridge hip end* |
| Angles available | n/a | 90°, 105° | 90°, 105° | 90°, 105° |
| Colours available | All colours | All colours | All colours | All colours |
| |  |  |  |  |
| Description | 450mm Angular ridge | 450mm Angular ridge stop end* | 450mm Angular ridge hip end* | 450mm Capped angular ridge |
| Angles available | 75°, 90°, 105°, 115°, 125°, 135° | 75°, 90°, 105°, 115°, 125°, 135° | 75°, 90°, 105°, 115°, 125°, 135° | 75°, 90°, 105°, 115°, 125°, 135° |
| Colours available | Red Smooth, Slate Black | Red Smooth, Slate Black | Red Smooth, Slate Black | Red Smooth, Slate Black, Staffordshire Blue‡ |
| |  |  |  |  |
| Description | 450mm Capped angular ridge hip end | 450mm Capped angular ridge stop end | Third round hip** | Third round hip end** |
| Angles available | 75°, 90°, 105°, 115°, 125°, 135° | 75°, 90°, 105°, 115°, 125°, 135° | n/a | n/a |
| Colours available | Red Smooth, Slate Black, Staffordshire Blue‡ | Red Smooth, Slate Black, Staffordshire Blue‡ | All colours | All colours |
| Pitch range | | | 30-45° | 30-45° |

* Made to order (subject to minimum order quantities)

** Some colours and angles made to order (subject to minimum order quantities)

‡ Staffordshire Blue available to order

† Angle ridge wing length will vary depending on ridge angle





§ Available in Red Smooth

# CLAY FITTINGS & ACCESSORIES

Important note: All the fittings shown on these pages can be used with clay plain tiles, but should not be used on rafter pitches below 35° with Acme double camber or Ashdowne handcrafted clay plain tiles.





## DECORATIVE RIDGES




Mortar bedded security ridge kits are available (see page 48)

| | | | | |
|---|---|---|---|---|
| |  |  |  |  |
| Description | Plain roll top** | Club crested ridge | Cocks comb crested ridge | Two hole crested ridge |
| Angles available | 75°, 90°, 105°, 115°, 125°, 135° | 90°, 105° | 90°, 105° | 90°, 105° |
| Colours available | Red Smooth, Slate Black | Red Smooth | Red Smooth | Red Smooth |

## CLAY FINIALS

Available in a range of colours and angles. Mortar bedded security ridge kits are available (see page 48)

| | | | | |
|---|---|---|---|---|
| |  |  |  |  |
| Description | Ball top finial* (half round base) | Ball top finial* (plain angle base) | Fleur-de-Lys gable* (half round base) | Fleur-de-Lys gable (plain angle base) |

| | | | | |
|---|---|---|---|---|
| |  |  |  |  |
| Description | Scroll finial* (half round and plain angle bases available) | Falcon finial* (half round and plain angle bases available) | Dragon finial* (plain angle base) | Extension piece (for Ball top / Fleur-de-Lys) |

The following dry fix and/or ventilation systems can also be used with clay plain tiles:

- Universal 10mm and 25mm eaves vent systems (page 52)
- Universal dry verge (page 52)
- Universal plain tile vent (page 55)
- Universal GRP valley (page 54)
- Universal RidgeFast system** (page 53)
- Universal HipFast system** (page 53)

* Made to order (subject to minimum order quantities)

** Subject to ridge/hip angle

† Angle ridge wing length will vary depending on ridge angle

Note: All measurements in mm.




# Clay interlocking tiles and fittings

# LINCOLN

The Lincoln is an easy-to-fix clay pantile which balances traditional aesthetics with speed of installation.



## COLOUR AVAILABILITY







Key
(SS) Semi-sanded sanded finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 370mm x 247mm | |
| Minimum pitch* | 17.5° (120mm headlap)<br>22.5° (75mm headlap) | |
| Maximum pitch | 70° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 294mm | |
| Cover width | 222mm (nominal) | |
| Covering capacity (net) | 15.3 tiles/m² at 75mm headlap | 18.0 tiles/m² at 120mm headlap |
| Weight of tiling (approx.) | 43.0kg/m² at 75mm headlap | 50.4kg/m² at 120mm headlap |
| Battens required (net) | 3.4 lin.m/m² at 75mm headlap | 4.0 lin.m/m² at 120mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 1304 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## COMPATIBLE DRY FIX AND VENTILATION SYSTEMS

- New Universal dry verge (page 52)
- Universal RidgeFast system (page 53)
- Universal HipFast system (page 53)
- Universal 10mm and 25mm eaves vent systems (page 52)
- Universal GRP dry valley system (page 54)


## SECURITY FIXING KITS

- Mortar bedded security ridge (page 48)
- Mortar bedded security hip (page 48)




## LINCOLN FITTINGS

Available in Rustic Red and Natural Red.





Left hand verge





Tile vent

## CLAY INTERLOCKING FITTINGS


Available in Rustic Red, Natural Red and Matt Black.





Half round ridge





Half round ridge end




Third round hip




Third round hip end




Dentil slips


Note: All measurements in mm.

# MELODIE

An interlocking single clay pantile with an easy-to-install flexible gauge, which is suitable for roof pitches as low as 12.5°.




## COLOUR AVAILABILITY







## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 440mm x 255mm | |
| Minimum pitch* | 12.5° | |
| Maximum pitch | 70° | |
| Minimum headlap | 92mm | |
| Batten spacing | 314mm (minimum gauge) | 348mm (maximum gauge) |
| Cover width | 209mm (nominal) | |
| Covering capacity (net) | 13.8 tiles/m² at 92mm headlap | |
| Weight of tiling (approx.) | 44kg/m² at 92mm headlap | |
| Battens required (net) | 2.88 lin.m/m² at 92mm headlap | |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 45mm x 3.35mm aluminium clout head | |
| Fixing clips | SoloFix (30435/30445), Eave clip (30452), Eave clip nail (30455), RH verge clip (30285), LH verge tile clip (30285) | |
| Authority | BS EN 1304 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## COMPATIBLE DRY FIX AND VENTILATION SYSTEMS

- Universal RidgeFast system (page 53)
- Universal HipFast system (page 53)
- Universal 10mm and 25mm eaves vent systems (page 52)
- Universal GRP dry valley system (page 54)


## SECURITY FIXING KITS

- Mortar bedded security ridge (page 48)
- Mortar bedded security hip (page 48)




## MELODIE FITTINGS

Available in Natural Red and Slate Grey.





Left hand verge tile
(double roll)





Cloak verge tile
(LH shown, RH also available)

## CLAY INTERLOCKING FITTINGS


Available in Rustic Red, Natural Red and Matt Black.





Half round ridge





Half round ridge end




Third round hip




Third round hip end




Dentil slips

Note: All measurements in mm.

# MAXIMA

A clay interlocking double roman tile, suitable for roof pitches down to 17.5°, with an easy-to-lay open gauge design.



## COLOUR AVAILABILITY








## TECHNICAL DATA

| | |
|---|---|
| Size of tile | 403mm x 333mm |
| Minimum pitch* | 17.5° |
| Maximum pitch | 70° |
| Minimum headlap | 75mm |
| Batten spacing | 328mm (at 75mm headlap) |
| Cover width | 300mm (nominal) |
| Covering capacity (net) | 10.1 tiles/m² at maximum headlap |
| Weight of tiling (approx.) | 43.4kg/m² at 75mm headlap |
| Battens required (net) | 3.05 lin.m/m² at 75mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Tile nails | 45mm x 3.35mm aluminium clout head |
| Fixing clips | SoloFix (30443/30433), Eave clip (30452), Eave clip nail (30455), RH verge clip (30289), LH verge tile clip (30289), LH verge clip – standard tile (30290) |
| Authority | BS EN 1304 |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## MAXIMA FITTINGS

Available in Natural Red and Matt Black





Left hand verge tile (double roll)





Cloak verge tile (LH shown, RH also available)

## CLAY INTERLOCKING FITTINGS


Available in Natural Red and Matt Black





Half round ridge





Half round ridge end




Third round hip




Third round hip end




Dentil slips

## COMPATIBLE DRY FIX AND VENTILATION SYSTEMS

- Universal RidgeFast system (page 53)
- Universal HipFast system (page 53)
- Universal 10mm and 25mm eaves vent systems (page 52)
- Universal GRP dry valley system (page 54)
- Universal tile vent (page 54)

Note: All measurements in mm.



# Concrete plain tiles and fittings


# PLAIN

The authentic cross camber design of the Marley concrete plain tile gives it a look to match its outstanding versatility.



## COLOUR AVAILABILITY


























Key (F) Fine sanded finish (G) Granular finish (S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 267mm x 168mm | |
| Minimum pitch* | 35° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 37.5mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 12mm (nominal) | |
| Cover width | 168mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 73.8kg/m² (0.72 kN/m²) at 100mm gauge (roof) | 58kg/m² (0.57 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 490 | |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

Tile camber
Single camber



Compatible with clay feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†











Bullnose†



## PLAIN TILE FITTINGS

Available in all colours to match main tiles.

| Description | Plain tile-and-a-half | Plain eaves/top tile | Cloak verge tile (Left & right hand) | Internal angle (Left & right hand) |
|---|---|---|---|---|
| |  |  |  |  |

| Description | External angle (Left & right hand) | Valley tile | Arris hip | Bonnet hip |
|---|---|---|---|---|
| |  |  |  |  |
| Angles available | 90°, 120°, 135° | 35-50° | 35-40° | 35-50° |

## PLAIN TILE VERGES, RIDGES & HIPS

For ridges and hips compatible with concrete plain tiles, see page 42.


Note: All measurements in mm.




# Concrete interlocking tiles and fittings


# EDGEMERE


A clean and precise slate-like appearance is enhanced by the thin leading edge and the broken bond laying technique.



## COLOUR AVAILABILITY







Key (S) Smooth finish

## TECHNICAL DATA

| | |
|---|---|
| Size of tile | 420mm x 330mm |
| Minimum pitch* | 22.5° (75mm headlap)<br>17.5° (100mm headlap) |
| Maximum pitch | 90° |
| Minimum headlap | 75mm (22.5° and above)<br>100mm (below 22.5°) |
| Maximum gauge | 345mm |
| Tile thickness | 18mm (nominal) |
| Cover width | 298mm (nominal) |
| Hanging length | 395mm (nominal) |
| Covering capacity (net) | 9.7 tiles/m² (0.43 kN/m²) at 75mm headlap<br>10.5 tiles/m² (0.47 kN/m²) at 100mm headlap |
| Weight of tiling (approx.) | 44kg/m² (0.43 kN/m²) at 75mm headlap<br>47.5kg/m² (0.47 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap<br>3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings | 45mm x 3.35mm slate nails |
| Fixing clips | Eaves, verge and slate clips |
| Authority | BS EN 490 |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## EDGEMERE HALF SLATE

Available in all colours to match main tiles.


Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.




Note: All measurements in mm.

# DUO EDGEMERE

A thin leading edge interlocking slate designed to look like and blend in with small format slates.



## COLOUR AVAILABILITY










Key
(S) Smooth finish

## TECHNICAL DATA

| | |
|---|---|
| Size of tile | 420mm x 330mm |
| Minimum pitch* | 22.5° (75mm headlap)<br>17.5° (100mm headlap) |
| Maximum pitch | 90° |
| Minimum headlap | 75mm (22.5° and above)<br>100mm (below 22.5°) |
| Maximum gauge | 345mm |
| Tile thickness | 18mm (nominal) |
| Cover width | 298mm (nominal) |
| Hanging length | 395mm (nominal) |
| Covering capacity (net) | 9.7 tiles/m² (0.43 kN/m²) at 75mm headlap<br>10.5 tiles/m² (0.47 kN/m²) at 100mm headlap |
| Weight of tiling (approx.) | 44kg/m² (0.43 kN/m²) at 75mm headlap<br>47.5kg/m² (0.47 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap<br>3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings | 45mm x 3.35mm slate nails |
| Fixing clips | Eaves, verge and slate clips |
| Authority | BS EN 490 |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## LAYING DUO EDGEMERE

Duo Edgemere should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site to form verges in alternate courses.

# RIVEN EDGEMERE

A thin leading edge interlocking slate with the addition of a riven surface, providing a more natural appearance with variegated look, depth and tone.



## COLOUR AVAILABILITY







Key
(S) Smooth finish

## TECHNICAL DATA

| | |
|---|---|
| Size of tile | 420mm x 330mm |
| Minimum pitch* | 22.5° (75mm headlap)<br>17.5° (100mm headlap) |
| Maximum pitch | 90° |
| Minimum headlap | 75mm (22.5° and above)<br>100mm (below 22.5°) |
| Maximum gauge | 345mm |
| Tile thickness | 18mm (nominal) |
| Cover width | 298mm (nominal) |
| Hanging length | 395mm (nominal) |
| Covering capacity (net) | 9.7 tiles/m² (0.43 kN/m²) at 75mm headlap<br>10.5 tiles/m² (0.47 kN/m²) at 100mm headlap |
| Weight of tiling (approx.) | 44kg/m² (0.43 kN/m²) at 75mm headlap<br>47.5kg/m² (0.47 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap<br>3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings | 45mm x 3.35mm slate nails |
| Fixing clips | Eaves, verge and slate clips |
| Authority | BS EN 490 |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## LAYING RIVEN EDGEMERE

Riven Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half width slates, cut from standard slates on site to form verges in alternate courses.

# MODERN

A flat, smooth, single lap interlocking design, whose appearance is enhanced by the required broken bond laying pattern.



## COLOUR AVAILABILITY











Key
(G) Granular finish
(S) Smooth finish







## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 22.5° Smooth (75mm headlap)<br>17.5 Smooth (100mm headlap) | 30° Granular (75mm headlap)<br>25° Granular (100mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Tile thickness | 30mm (nominal) | |
| Cover width | 292mm (nominal) | |
| Hanging length | 397mm (nominal) | |
| Covering capacity (net) | 9.9 tiles/m² at 75mm headlap | 10.7 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 50kg/m² (0.49 kN/m²) at 75mm headlap | 54kg/m² (0.53 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap | 3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Fixings | 50mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

Note: All measurements in mm.

## MODERN HALF TILE


Available in all colours to match main tiles.

Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.




# DUO MODERN

A flat, smooth, single lap, interlocking tile with a 'mock bond' joint is enhanced by the required broken bond laying technique.



## COLOUR AVAILABILITY







Key
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 22.5° (75mm headlap)<br>17.5° (100mm headlap) | |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Tile thickness | 30mm (nominal) | |
| Cover width | 292mm (nominal) | |
| Hanging length | 397mm (nominal) | |
| Covering capacity (net) | 9.9 tiles/$m^2$ at 75mm headlap | 10.7 tiles/$m^2$ at 100mm headlap |
| Weight of tiling (approx.) | 50kg/$m^2$ (0.49 kN/$m^2$) at 75mm headlap | 54kg/$m^2$ (0.53 kN/$m^2$) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/$m^2$ at 75mm headlap | 3.1 lin.m/$m^2$ at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Fixings | 50mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ $A^+$ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## LAYING DUO MODERN

Duo Modern should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width tiles, cut from standard tiles on site to form verges in alternate courses.

# DOUBLE ROMAN

A 2000 year old profile with precision-engineered functionality.




## COLOUR AVAILABILITY


















Key
(G) Granular finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap) | 30° Granular (75mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Body thickness | 28mm (nominal) | |
| Profile depth | d > 20mm | |
| Overall depth | 53mm | |
| Cover width | 300mm (nominal) | |
| Hanging length | 397mm (nominal) | |
| Covering capacity (net) | 9.7 tiles/m² at 75mm headlap | 10.4 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 44kg/m² (0.43 kN/m²) at 75mm headlap | 47kg/m² (0.46 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap | 3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 65mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

# MENDIP

A double pantile design with elegant flowing lines, providing instant visual appeal.







## COLOUR AVAILABILITY


Anthracite (S)


Smooth Grey (S)


Antique Brown (G)


Smooth Brown (S)


Dark Red (G)


Old English Dark Red (S)


Mosborough Red (S)

Key
(G) Granular finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 17.5° Smooth (75mm headlap)<br>15° Smooth (100mm headlap) | 30° Granular (75mm headlap)<br>25° Granular (100mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Body thickness | 27mm (nominal) | |
| Profile depth | d > 20mm | |
| Overall depth | 59mm | |
| Cover width | 298mm (nominal) | |
| Hanging length | 397mm (nominal) | |
| Covering capacity (net) | 9.7 tiles/m² at 75mm headlap | 10.5 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 46kg/m² (0.45 kN/m²) at 75mm headlap | 49kg/m² (0.48 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap | 3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 70mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified


## EXTENDED RAFTER LENGTHS

Mendip interlocking tiles can now perform at extended rafter lengths as follows:

- 15° - 17.5° pitch with a rafter length up to and including 15m will require a 100mm headlap.
- 17.5° pitch and above with a rafter length up to and including 15m will require a 75mm headlap.


# LUDLOW MAJOR

Simple, strong lines exploit the interplay between light and shade.



## COLOUR AVAILABILITY

















Key
(G) Granular finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap) | 30° Granular (75mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Body thickness | 25mm (nominal) | |
| Profile depth | d > 11mm | |
| Cover width | 295mm (nominal) | |
| Hanging length | 399mm (nominal) | |
| Covering capacity (net) | 9.8 tiles/$m^2$ at 75mm headlap | 10.6 tiles/$m^2$ at 100mm headlap |
| Weight of tiling (approx.) | 45kg/$m^2$ (0.44 kN/$m^2$) at 75mm headlap | 49kg/$m^2$ (0.48 kN/$m^2$) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/$m^2$ at 75mm headlap | 3.1 lin.m/$m^2$ at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 55mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ $A^+$ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

# ECOLOGIC LUDLOW MAJOR

The unique EcoLogic coating applied to the Ludlow Major tile, removes nitrogen oxides and other pollutants from the atmosphere. The tile also includes much higher levels of recycled content.



## COLOUR AVAILABILITY




Key
(G) Granular finish

## TECHNICAL DATA


| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 30° Granular (75mm headlap) | |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Body thickness | 25mm (nominal) | |
| Profile depth | d > 11mm | |
| Cover width | 295mm (nominal) | |
| Hanging length | 399mm (nominal) | |
| Covering capacity (net) | 9.8 tiles/m² at 75mm headlap | 10.6 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 45kg/m² (0.44 kN/m²) at 75mm headlap | 49kg/m² (0.48 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap | 3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 55mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ $A^+$ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ High level of recycled content

## ECOLOGIC COMPOSITION

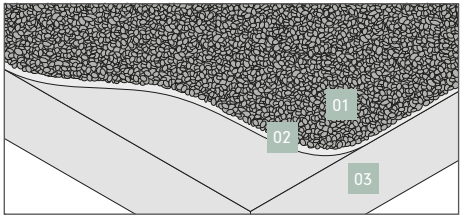



01/ Photocatalytic granules stimulated by sunlight to remove NOx

02/ Photocatalytic pigmented slurry adhesive

03/ Concrete body containing nearly 50% recycled material


# LUDLOW PLUS

Ideal for refurbishment applications, where its smaller format reduces wastage.




## COLOUR AVAILABILITY


Greystone (G)


Smooth Grey (S)


Antique Brown (G)


Smooth Brown (S)


Dark Red (G)


Old English Dark Red (S)

Key
(G) Granular finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 387mm x 229mm | |
| Minimum pitch* | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap) | 30° Granular (75mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 312mm | |
| Body thickness | 25mm (nominal) | |
| Profile depth | d > 11mm | |
| Cover width | 204mm (nominal) | |
| Hanging length | 361mm (nominal) | |
| Covering capacity (net) | 15.7 tiles/m² at 75mm headlap | 17.1 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 47kg/m² (0.46 kN/m²) at 75mm headlap | 51kg/m² (0.50 kN/m²) at 100mm headlap |
| Battens required (net) | 3.2 lin.m/m² at 75mm headlap | 3.5 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 50mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified


# WESSEX


Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style.






## COLOUR AVAILABILITY


Smooth Brown (S)


Smooth Grey (S)

Key
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 420mm x 330mm | |
| Minimum pitch* | 15° | |
| Maximum pitch | 44° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 345mm | |
| Body thickness | 29mm (nominal) | |
| Profile depth | d > 20mm | |
| Overall depth | 56mm | |
| Cover width | 298mm (nominal) | |
| Hanging length | 403mm (nominal) | |
| Covering capacity (net) | 9.7 tiles/m² at 75mm headlap | 10.5 tiles/m² at 100mm headlap |
| Weight of tiling (approx.) | 50kg/m² (0.49 kN/m²) at 75mm headlap | 53kg/m² (0.52 kN/m²) at 100mm headlap |
| Battens required (net) | 2.9 lin.m/m² at 75mm headlap | 3.1 lin.m/m² at 100mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

# ANGLIA

A single lap interlocking concrete tile with the classic clay pantile profile and a bullnosed leading edge design.



## COLOUR AVAILABILITY










Key
(G) Granular finish
(S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 387mm x 230mm | |
| Minimum pitch* | 30° Smooth (75mm headlap)<br>25° Smooth (100mm headlap) | 30° Granular (75mm headlap) |
| Maximum pitch | 90° | |
| Minimum headlap | 75mm | |
| Maximum gauge | 312mm | |
| Body thickness | 30mm (nominal) | |
| Profile depth | d > 20mm | |
| Overall depth | 71mm | |
| Cover width | 204mm (nominal) | |
| Hanging length | 370mm (nominal) | |
| Covering capacity (net) | 15.7 tiles/m² at 75mm headlap<br>17.1 tiles/m² at 100mm headlap | |
| Weight of tiling (approx.) | 47kg/m² (0.46 kN/m²) at 75mm headlap<br>51kg/m² (0.50 kN/m²) at 100mm headlap | |
| Battens required (net) | 3.2 lin.m/m² at 75mm headlap<br>3.5 lin.m/m² at 100mm headlap | |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 3.35mm | |
| Fixing clips | Eaves, verge and tile clips | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ $A^+$ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

# ASHMORE

A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.



## COLOUR AVAILABILITY










Key
(S) Smooth finish

## TECHNICAL DATA

| | |
|---|---|
| Size of tile | 267mm x 333mm |
| Minimum pitch* | 25° (77mm headlap)<br>22.5° (92mm headlap) |
| Maximum pitch | 90° |
| Minimum headlap | 77mm |
| Maximum gauge | 190mm |
| Tile thickness | 16mm (nominal) |
| Cover width | 302mm (nominal) |
| Hanging length | 235mm (nominal) |
| Covering capacity (net) | 17.5 tiles/m² at 77mm headlap<br>19 tiles/m² at 92mm headlap |
| Weight of tiling (approx.) | 48kg/m² (0.47 kN/m²) at 77mm headlap<br>52kg/m² (0.51 kN/m²) at 92mm headlap |
| Battens required (net) | 5.3 lin.m/m² at 77mm headlap<br>5.8 lin.m/m² at 92mm headlap |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings | 45mm x 3.35mm slate nails |
| Fixing clips | Eaves, verge and tile clips |
| Authority | BS EN 490 |


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## ASHMORE FITTINGS


Available in all colours to match main tiles.




Ashmore three quarter tile (LH)




Ashmore three quarter tile (RH)




Ashmore tile-and-a-half






Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.





Note: All measurements in mm.






# CONCRETE FITTINGS




## VERGES, RIDGES AND HIPS

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

| | | | | | |
|---|---|---|---|---|---|
| |  |  |  |  |  |
| Description | Cloak verge (Modern, Mendip and Double Roman, see page 56) | Modern ridge†‡* | Modern security ridge | Segmental ridge†* | Modern mono ridge |
| Pitch range | n/a | 15-55° dry ridge | 15-45° bedded | 15-55° dry ridge | 15-45° bedded |

| | | | | | |
|---|---|---|---|---|---|
| |  |  |  |  |  |
| Description | Segmental security ridge | Segmental mono ridge† | Segmental mono block end ridge | Modern mono block end ridge | Third round hip tile‡§ |
| Pitch range | 15-50° bedded | 15-55° dry ridge | 115-55° dry ridge | 15-45° bedded | 17.5-45° dry ridge |

| | | | | | |
|---|---|---|---|---|---|
| |  |  |  |  |  |
| Description | Segmental block end ridge* | Modern block end ridge* | 90° Angle ridge/hip (Security 90° Angle also available) | 125° Angle ridge/hip (Security 125° Angle also available)** | Pascoll roll baby ridge |
| Pitch range | 15-55° dry ridge | 15-55° dry ridge | 45-50° bedded | 15-25° | 15-45° |

| | | | |
|---|---|---|---|
| |  |  |  |
| Description | Half round baby ridge | Ridge vent terminal | Gas vent ridge terminal (Also available: Gas vent ridge for condensing boilers) |
| Pitch range | 15-55° | 15-55° dry ridge | 15-55° dry ridge |

§ Compatible with Marley Universal HipFast.
* Compatible with Marley Universal RidgeFast.
** Also available – 145° Angle ridge/hip and Security 145° Angle ridge/hip

Note: All measurements in mm.

† Compatible with Marley ventilated dry ridge system.
‡ Compatible with Marley dry hip system.



# Shingles & Shakes

# SHINGLES

A truly renewable and sustainable roofing and cladding material.





## TECHNICAL DATA

| | | |
|---|---|---|
| Length | 400mm | |
| Width | 75-350mm (random) | |
| Pitch and gauge | 14-21° at 95mm gauge (roof)<br>22-74° at 125mm gauge (roof) | 75-90° at 190mm gauge (vertical) |
| Maximum pitch | 90° | |
| Thickness | 10mm at the butt, tapering | |
| Covering (bundle) | 1.73m² at 95mm gauge (roof)<br>2.28m² at 125mm gauge (roof) | 3.2m² at 190mm gauge (vertical) |
| Laid weight (approx.)* | 9.4kg/m² at 190mm gauge (roof)<br>6.1kg/m² at 290mm gauge (roof) | 4.0kg/m² at 175mm gauge (vertical) |
| Battens required (net) | 8.1 lin.m/m² at 95mm gauge (roof)<br>6.1 lin.m/m² at 125mm gauge (roof) | 5.3 lin.m/m² at 175mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Fixings | ShingleFix – S16 x 38mm stailnless steel staples<br>Silicon bronze nails – 31 x 1.8mm | |
| Authority | Cedar Shake and Shingle Bureau | |

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

* Laid weights shown are for 'clean' untreated shingles.

# SHAKES

Premier No. 1 Grade Blue Label Western Red Cedar Shake for roofing and cladding.





## TECHNICAL DATA

| | |
|---|---|
| Length | 600mm |
| Width | 75-300mm (random) |
| Pitch and gauge | 20-89° at 190mm gauge (roof)<br>90° at 290mm gauge (roof) |
| Maximum pitch | 90° |
| Thickness | 19mm at the butt, tapering |
| Covering (bundle) | 1.39m² at 190mm gauge (roof)<br>2.12m² at 290mm gauge (roof) |
| Laid weight (approx.)* | 9.4kg/m² at 190mm gauge (roof)<br>6.1kg/m² at 290mm gauge (roof) |
| Battens required (net) | 5.3 lin.m/m² at 190mm gauge (roof)<br>3.5 lin.m/m² at 290mm gauge (roof) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings | Silicon bronze nails 45 x 2.65mm |
| Authority | Cedar Shake and Shingle Bureau |

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

* Laid weights shown are for 'clean' untreated shingles.



# Fixings

# FIXINGS

## SOLOFIX

Manufactured from Zial®, an integrated clip and nail that is quick and simple to install. See page 48 for more information and best practice for fixing.

| Profile | Pack size (500) Code No. | Pack size (100) Code No. |
|---|---|---|
| Modern | 30430 | 30440 |
| Ludlow Major/EcoLogic | 30430 | 30440 |
| Ludlow Plus | 30430 | 30440 |
| Edgemere range | 30431 | 30441 |
| Mendip | 30432 | 30442 |
| Wessex | 30432 | 30442 |
| Double Roman | 30433 | 30443 |
| Anglia | 30434 | 30444 |
| Lincoln | 30432 | 30442 |
| Maxima | 30433 | 30443 |
| Melodie | 30445 | 30445 |

## STAINLESS STEEL FIXINGS

| Description | Code No. | Quantity |
|---|---|---|
| Ashmore clip and nail pack | 30130 | 100 |

## ALUMINUM NAIL PACKS

| Profile | Code No. | Pack No. | Quantity |
|---|---|---|---|
| Plain | 30348 | 25 | 793 |
| Anglia, Lincoln | 30349 | 26 | 520 |
| Ludlow Plus, Modern, Duo Modern | 30350 | 27 | 396 |
| Double Roman | 30351 | 28 | 308 |
| Mendip | 30352 | 29 | 287 |
| Edgemere range, Ashmore, Melodie, Maxima | 30398 | 31 | 432 |
| Ludlow Major/EcoLogic | 30371 | 32 | 373 |

## ALUMINIUM VERGE AND EAVES CLIP PACKS

The table below shows the quantities packaged together with the correct sized nail.

| Profile | Right hand verge clip and nail pack – 50 clips and nails Code No. | Left hand verge clip and nail pack – 50 clips and nails Code No. | Eave clip and nail pack 100 clips and nails Code No. |
|---|---|---|---|
| Ludlow Plus | 30290 | 30290 | 30277 |
| Anglia | 30284 | 30286 | 30274 |
| Ludlow Major/EcoLogic | 30287 | 30287 | 30277 |
| Mendip | 30288 | 30287 | 30276 |
| Double Roman | 30289 | 30290 | 30275 |
| Wessex | 30286 | 30286 | 30278 |
| Modern | 30290 | 30290 | 30273 |
| Duo Modern | 30290 | 30290 | 30273 |
| Edgemere range | 30263 | 30263 | 30297 |
| Ashmore* | 30263 | 30263 | 30297 |
| Lincoln | 30284 | 30286 | 30452 |
| Maxima | 30289 | 30290†, 30289‡ | 30452*, 30455§ |
| Melodie | 30285 | 30285 | 30452*, 30455§ |

* Clips only † For standard tile ‡ For verge tile § Nails only

# OTHER BS 5534 SOLUTIONS

BS 5534 is the British Standard for Slating and Tiling and provides the industry with guidance on best practice relating to the installation of roofs.

## MORTAR BEDDED SECURITY RIDGE



Mechanical fixing system for mortar bedded ridge tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Watch a quick video on mortar bedded mechanical fixing at marley.co.uk/securityridge

| | |
|---|---|
| Mortar bedded security ridge kit (illustrated above)<br>- 10 No. batten brackets<br>- 13 No. clamps<br>- 13 No. 75mm x 4.8mm s/s screws<br>- 40 No. 25mm x 2.65mm s/s ARS nails | 54365 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay half round ridge with profiled tiles) | 70000 |

## MORTAR BEDDED SECURITY HIP



Mechanical fixing system for mortar bedded hip tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Watch a quick video on mortar bedded mechanical fixing at marley.co.uk/securityhip

| | |
|---|---|
| Mortar bedded security hip kit (illustrated above)<br>- 6 No. batten brackets<br>- 13 No. clamps<br>- 13 No. 75mm x 4.8mm s/s screws<br>- 40 No. 25mm x 2.65mm s/s ARS nails | 54366 |
| Tile tail clip pack | 43602 |
| Tile head clip pack | 43604 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay half round ridge with profiled tiles) | 70000 |
| Secret cut tile clip pack | 43607 |

## SOLOFIX



SoloFix is a one-piece clip and nail for all standard interlocking tiles, providing an affordable fixing that not only installs up to 30% faster than traditional clips, but delivers outstanding strength and durability.

To see how SoloFix performs against traditional clips, watch our roof installation race at marley.co.uk/solofix



# Dry fix & ventilation systems

# SYSTEM SELECTOR

| |  CLAY PLAIN TILES |  CONCRETE PLAIN TILES |  LINCOLN |  MAXIMA |  MELODIE |
|---|---|---|---|---|---|
| UNIVERSAL ROOFING ACCESSORIES | | | | | |
| 10mm eaves vent system | ✓ | ✓ | ✓ | ✓ | ✓ |
| 25mm eaves vent system | ✓ | ✓ | ✓ | ✓ | ✓ |
| Dry verge | | | ✓ | ✓ | |
| HipFast | ✓ | ✓ | ✓ | ✓ | ✓ |
| RidgeFast | ✓ | ✓ | ✓ | ✓ | ✓ |
| Tile vent | ✓ | ✓ | | ✓ | |
| GRP dry valley system | ✓ | ✓ | ✓ | ✓ | ✓ |
| Underlays | ✓ | ✓ | ✓ | ✓ | ✓ |
| DRY VERGE SYSTEMS | | | | | |
| Cloak verge system | ✓ | ✓ | | ✓ | ✓ |
| Edgemere dry verge | | | | | |
| Ashmore dry verge | | | | | |
| Continuous dry verge | ✓ | ✓ | | | |
| DRY HIP SYSTEMS | | | | | |
| Dry hip | | ✓ | | | |
| DRY VALLEY SYSTEMS | | | | | |
| Plain tile valley | ✓ | ✓ | | | |
| VENTILATED DRY RIDGE | | | | | |
| Ventilated dry ridge | | ✓ | | | |
| Ventilated mono dry ridge | | ✓ | | | |
| ABUTMENT SYSTEMS | | | | | |
| Top abutment ventilation system | | | ✓ | | ✓ |
| Dry fix soakers | ✓ | ✓ | | | |
| Flexfast Lead replacement roll | ✓ | ✓ | ✓ | ✓ | ✓ |
| VENTILATION TERMINALS | | | | | |
| Gas vent ridge terminals | | ✓ | | | |
| Ridge vent terminals | | ✓ | | | |
| In-line vents and contour vents | ✓ | ✓ | | | |
| Tile vent terminals | | | | | |
| Ventilation roof tile | | | | | |
| Ridge vent terminal for condensing boiler | | ✓ | | | |
| BONDING GUTTERS | ✓ | ✓ | ✓ | ✓ | ✓ |

|  EDGEMERE RANGE |  MODERN & DUO MODERN |  DOUBLE ROMAN |  MENDIP |  LUDLOW MAJOR/ ECOLOGIC |  WESSEX |  LUDLOW PLUS |  ANGLIA |  ASHMORE |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | ✓* | ✓ | ✓ | | | | | |
| ✓ | | | | | | | | |
| | | | | | | | | ✓ |
| | | | | | | | | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | | |
| | | | | | | | | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | | | | | | | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | | |
| ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| | | | | | | | | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* Suitable for Modern only

# UNIVERSAL ROOFING ACCESSORIES

Suitable for use with Marley roofing products and those of other manufacturers.†

## UNIVERSAL 10MM/25MM EAVES VENT



Designed to provide low level ventilation to roof voids in an efficient and unobtrusive manner for roof pitches from 12.5-55°. For all tiles and slates.

| | |
|---|---|
| Universal 10mm eaves vent system (6m pack)<br>- 6m eaves rafter roll<br>- 10 No. felt support tray<br>- 6 No. strip ventilator | 46350 |
| Universal 25mm eaves vent system (6m pack)<br>- 6m eaves rafter roll<br>- 10 No. felt support tray<br>- 6 No. strip ventilator | 46351 |
| Comb filler strip | 30425 |
| Continuous rafter roll (2 x 6m) | 46323 |
| Gutter spacers (20 No.) | 46353 |

## UNIVERSAL DRY VERGE




The Marley Universal Dry Verge system has been designed to make verge detailing secure, BS 5534 compliant and elegantly simple.

| | | |
|---|---|---|
| Dry verge system | | |
| 28 No. left hand units | | 391* |
| 28 No. right hand units | | 392* |
| Fixing kit (also available) | | 53931 |
| End caps | | |
| Modern ridge | | 394* |
| Segmental ridge | | 395* |
| Modern mono-ridge | Left hand | 408* |
| | Right hand | 409* |
| Segmental mono-ridge | Left hand | 427* |
| | Right hand | 428* |
| Dry verge refurbishment kit | | 53580 |

† Check with the manufacturer to confirm compatibility with Marley systems.
* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta
** Contact Technical Advisory Service for more information


## UNIVERSAL HIPFAST SYSTEM

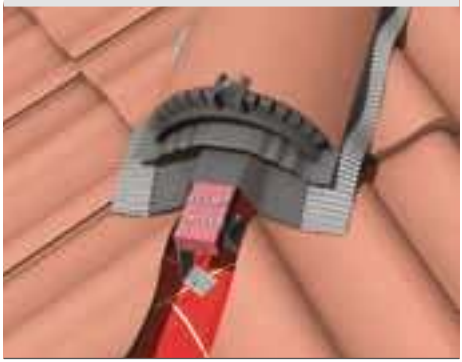

Simple and rapidly installed ventilated dry hip system, compatible with all tiles and slates up to 45° (suitable up to 60° subject to tile/slate profile and hip tile type).

| | |
|---|---|
| Universal HipFast system (6m pack)<br>- 6m length hip roll<br>- 6 No. batten brackets<br>- 13 No. hip unions<br>- 2 No. tapered filler units | 53400 |
| Hip support trays<br>- 9 No. 715mm | 34002 |
| RidgeFast/HipFast Union Packs | 53303 |
| Tile head clip pack<br>Tile tail clip pack<br>Secret cut tile clip pack | 43604<br>43602<br>43607 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay third round hips with profiled tiles) | 70000 |

## UNIVERSAL RIDGEFAST SYSTEM

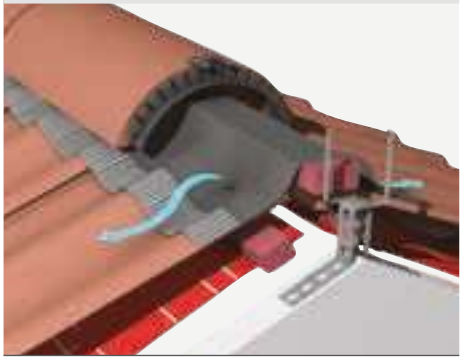

Simple and rapidly installed ventilated dry ridge system providing 5mm continuous ventilation. Compatible with all tiles and slates from 15-60° dependent on circumstances.

| | |
|---|---|
| Universal RidgeFast system (6m pack)<br>- 6m length ridge roll<br>- 10 No. ridge batten brackets<br>- 13 No. ridge union straps<br>- 13 No. ridge union clamps | 53300 |
| RidgeFast/HipFast Union Packs | 53303 |
| RidgeFast roll applicator (optional)<br>RidgeFast blanking tape (optional) | 33002<br>33001 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay third round hips with profiled tiles) | 70000 |

## More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too: marley.co.uk/dryfix

# UNIVERSAL ROOFING ACCESSORIES

Suitable for use with Marley roofing products and those of other manufacturers.†

## UNIVERSAL GRP DRY VALLEY



Mortar-free solution suitable for use with concrete interlocking tiles and concrete/clay plain tiles. Suitable on rafter pitches from 17.5-60° and accommodates up to 20° pitch difference either side of valley.

| Universal GRP dry valley | |
|---|---|
| (3m lengths) | |
| low profile | 30422 |
| high profile | 30421 |

## UNIVERSAL TILE VENT



Suitable for roof void ventilation and connection to 110mm soil/mechanical extraction. Compatible with large format interlocking tiles and roof pitches 20° and above.

| Universal Tile vent | |
|---|---|
| Grey | 36700 |
| Brown | 36703 |
| Terracotta | 36704 |
| Flexible pipe | 39091 |

† Check with the manufacturer to confirm compatibility with Marley systems.

## UNIVERSAL PLAIN TILE VENT



Designed for natural, mechanical or soil pipe ventilation. Provides 10,000mm² free area of ventilation and suitable for concrete and clay plain tile roof pitches 22.5° and above‡.

| | | | |
|---|---|---|---|
| Universal plain tile vent | | | |
| Grey | | | 45501 |
| Brown | | | 45503 |
| Red | | | 45505 |
| Flexible pipe ID 110mm (sold separately) | | | 39091 |
| Pressure resistance values | | | |
| Pa (litres/sec airflow) | 15 | 30 | 60 |
| Free air area (10,000mm²) | 13.6 | 53.7 | 21 |

‡ Please note minimum pitch of tile will apply.

## UNIVERSAL UNDERLAYS




Marley Universal underlays are high performance roof membranes which are zone 1-5 compliant, in accordance with BS 5534.

| | |
|---|---|
| Universal vapour permeable underlay (50m) | MA33150 |
| Universal non-breathable underlay (45m) | MA33145 |

## More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too: marley.co.uk/dryfix

# DRY FIX & VENTILATION

## CONCRETE CLOAK VERGE SYSTEMS



Provides a mechanically fixed, durable, maintenance free verge solution. Suitable up to 45° for Mendip, Modern, Double Roman tiles and 55° for plain tiles.

| | |
|---|---|
| **Mendip cloak verge (illustrated above)** | |
| Left hand | 245 |
| Right hand | 246 |
| Mendip half tile | 147 |
| Mendip fixing kit | 54252 |
| **Double Roman cloak verge** | |
| Left hand | 265 |
| Right hand | 266 |
| Double Roman half tile | 102 |
| Double Roman fixing kit | 54252 |
| **Concrete plain tile cloak verge** | |
| Left hand | 249 |
| Right hand | 250 |
| **Segmental block end ridge** | 191 |
| **Segmental mono block end ridge** | |
| Left hand | 189 |
| Right hand | 190 |
| **Modern cloak verge** | |
| Left hand | 371 |
| Right hand | 370 |
| Modern cloak verge half tile | 372 |
| Modern fixing kit | 37300 |
| **Modern block end ridge** | 374 |
| **Modern mono block end ridge** | |
| Left hand | 375 |
| Right hand | 376 |
| **Clay plain tile cloak verge** | |
| Left hand | MAKE**ZLVTB |
| Right hand | MAKE**ZRVTB |

** Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 031 Natural Orange, 033 Heather Blend, 034 Burnished, 113 Ashurst, 122 Aylesham Mix, 140 Chailey, 141 Burford, 142 Loxleigh, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

## EDGEMERE DRY VERGE SYSTEM



Compatible with Edgemere, installed at a range of headlaps and rafter pitches from 17.5-45° (suitable up to 55° when used with the 'steep pitch ridge batten section', see Dry ridge system).

| | | |
|---|---|---|
| **Verge units** | | |
| Left hand | | 381* |
| Right hand | | 382* |
| **Edgemere dry verge fixing kit** | | 53830 |
| **End caps** | | |
| Edgemere ridge | | 384* |
| Modern mono-ridge | Left hand | 408* |
| | Right hand | 409* |
| Segmental mono-ridge | Left hand | 427* |
| | Right hand | 428* |
| **Dry verge refurbishment kit** | | 53580 |

* Suffix with colour code 01 Grey, 03 Brown

## CONTINUOUS DRY VERGE



Continuous dry verge provides a strong, weathertight and maintenance-free verge that meets the requirements of BS 5534. The system is fast and simple to install and offers sleek, uninterrupted verges without the need for mortar.

| | |
|---|---|
| **Continuous dry verge** | |
| Verge section (3 metre) | 38501 |
| Fixing kit | 38510 |

## CLAY CLOAK VERGE SYSTEMS



Provides a mechanically fixed, durable, maintenance free verge solution. Suitable up to 70° for Maxima and Melodie clay interlocking tiles.

| | |
|---|---|
| **Maxima cloak verge (illustrated above)** | |
| Left hand Natural Red | 82670 |
| Right hand Natural Red | 82571 |
| Left hand Matt Black | 159085 |
| Right hand Matt Black | 159087 |
| **Melodie cloak verge** | |
| Left hand Natural Red | 90780 |
| Right hand Natural Red | 90778 |
| Left hand Slate Grey | 91590 |
| Right hand Slate Grey | 91689 |

## ASHMORE DRY VERGE



Compatible with Ashmore, this new dry verge provides a strong, mechanically fixed, weathertight verge that meets the requirements of BS 5534. The system is fast and simple to install and offers a sleek, maintenance-free verge solution.

| | |
|---|---|
| **Verge units** | |
| Left hand Grey | MA39611 |
| Right hand Grey | MA39711 |
| Left hand Brown | MA39613 |
| Right hand Brown | MA39713 |
| Left hand Terracotta | MA39614 |
| Right hand Terracotta | MA39714 |
| **End caps** | |
| Segmental ridge end cap Grey | MA39801 |
| Segmental ridge end cap Brown | MA39803 |
| Segmental ridge end cap Terracotta | MA39804 |

## VENTILATED DRY HIP SYSTEM



Suitable for all concrete tiles when used in conjunction with Third round or Modern hip tiles for roof pitches 15-45°.

| | | |
|---|---|---|
| **Batten sections** | | |
| Low profile | | 43300 |
| High profile | | 43400 |
| **Fixing kits** | | |
| Low profile | | 54360 |
| High profile | | 54361 |
| Hip tail clip pack | | 43602 |
| **Ridge unions** | | |
| Modern ridge union | | 4140* |
| Third round hip union | | 4350* |
| **Apex caps** | | |
| Modern hip apex cap | (15-24°) | 4381* |
| | (25-35°) | 4382* |
| | (36-45°) | 4383* |
| Third round hip apex cap | (15-24°) | 4371* |
| | (25-35°) | 4372* |
| | (36-45°) | 4373* |
| **Block end hip tiles** | | |
| Third round block end hip tile | | 291 |
| Modern block end hip tile | | 292 |

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

# DRY FIX & VENTILATION

## VENTILATED DRY RIDGE SYSTEM



Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°**.

| | |
|---|---|
| **Batten sections** | |
| Low profile | 41101 |
| High profile | 41201 |
| Steep pitch (low profile) | 41102 |
| Steep pitch (high profile) | 41202 |
| **Ridge unions** | |
| Segmental ridge union | 413* |
| Modern ridge union | 414* |
| Modern/segmental adaptor ridge union | 420* |
| Concrete tiles & slates fixing kit | 41000 |
| **Filler units†** | |
| Double Roman - vented | 42105 |
| Plain, Modern, Duo Modern, Edgemere - vented | 41501 |
| Ludlow Major/EcoLogic - vented | 41601 |
| Ludlow Plus - vented | 41508 |
| Mendip - vented | 41701 |
| Wessex - vented | 41901 |
| Anglia - vented | 41506 |
| Dry ridge set out gauge | 41001 |
| **Apex caps** | |
| Segmental ridge junction | 439* |
| Modern ridge junction | 440* |

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta
** For roof pitches over 35°, speak to the Technical Advisory Service
† Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)

## VENTILATED DRY MONO RIDGE SYSTEM



Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°**.

| | |
|---|---|
| **Batten sections** | |
| Low profile | 41101 |
| High profile | 41201 |
| Steep pitch (low profile) | 41102 |
| Steep pitch (high profile) | 41202 |
| **Ridge unions** | |
| Segmental mono ridge union | 423* |
| Concrete tiles & slates fixing kit | 41000 |
| **Filler units†** | |
| Double Roman - vented | 42105 |
| Plain, Modern, Duo Modern, Edgemere - vented | 41501 |
| Ludlow Major/EcoLogic - vented | 41601 |
| Ludlow Plus - vented | 41508 |
| Mendip - vented | 41701 |
| Wessex - vented | 41901 |
| Anglia - vented | 41506 |
| Dry ridge set out gauge | 41001 |
| **Apex caps** | |
| Top abutment support strip | 42505 |
| Top abutment fixing kit | 41000 |

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta
† Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)

## TOP ABUTMENT VENTILATION SYSTEM



Designed to provide a totally dry fixed and weathertight top abutment that is fast and simple to install and at the same time provides ventilation at apex of the abutment.

| | |
|---|---|
| **Batten sections** | |
| Low profile | 41101 |
| High profile | 41201 |
| Steep pitch (low profile) | 41102 |
| Steep pitch (high profile) | 41202 |
| Lead support strip | 42505 |
| Fixing Kits | 41000 |
| **Filler units†** | |
| Double Roman - vented | 42105 |
| Modern, Duo Modern, Edgemere - vented | 41501 |
| Ludlow Major/EcoLogic - vented | 41601 |
| Ludlow Plus - vented | 41508 |
| Mendip - vented | 41701 |
| Wessex - vented | 41901 |
| Anglia - vented | 41506 |

## DRY FIX SOAKERS



An easy-to-install, lightweight and highly affordable way to reduce both the material and labour costs associated with lead at side abutments.

| | |
|---|---|
| **Modern dry soakers** | |
| Left hand | MA30476 |
| Right hand | MA30477 |
| **Edgemere dry soakers** | |
| Left hand | MA30474 |
| Right hand | MA30475 |
| **Ashmore dry soakers** | |
| Left hand | MA30472 |
| Right hand | MA3047 |
| **Clay/concrete plain tile dry soakers** | |
| Left hand | MA30478 |
| Right hand | MA30479 |

## FLEXFAST LEAD REPLACEMENT ROLL



Flexfast is an easy-to-use, lightweight flashing for abutments at walls, side and top, abutments at rising parts of structures such as dormers and chimneys.

| | |
|---|---|
| 5m x 450mm x 1.7mm | MA42611 |
| 5m x 300mm x 1.7mm | MA42610 |

## BONDING GUTTERS




Easy-to-install, lightweight and highly affordable way to reduce the need for mortar and lead at the junction between two different roof coverings.

| | |
|---|---|
| High profile | MA40471 |
| Low profile | MA40470 |

# DRY FIX & VENTILATION

## CLAY IN-LINE VENT

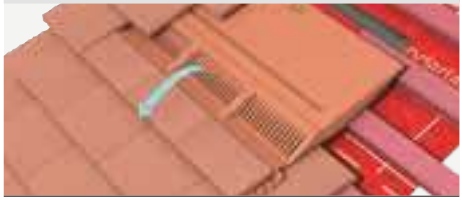

Real clay tile slips provide visual integration on roof slope and 7,500mm² free area of ventilation.

| | |
|---|---|
| Clay in-line tile ventilator | MAKE**ZICVB |
| Clay in-line tile adaptor | EU_INLINESLATEADAP |
| Flexible pipe | 39091 |

** Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 031 Natural Orange, 033 Heather Blend, 034 Burnished, 113 Ashurst, 122 Aylesham Mix, 140 Chailey, 141 Burford, 142 Loxleigh, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

## RIDGE VENT TERMINALS



Suitable for natural soil, or mechanical ventilation. Provides high level ventilation for concrete tiles (9,500mm² free area), clay plain tiles (10,000mm² free area).

| | |
|---|---|
| **Ridge vent terminal** | |
| Illustrated above – for natural ventilation of the roof void apex and connection to mechanical ventilation systems. | |
| For concrete tiles | 198 |
| **Gas vent ridge terminal for condensing boilers** | |
| Segmental | 254 |
| Modern | 255 |
| **Gas vent ridge terminal (concrete tiles)** | |
| For connection to gas appliances of rated input of 60 Kw max. only (not suitable for gas condensing boilers or oil fired boilers). | |
| With extension piece | 256 |
| Gasket set (spare) | 30346 |
| Plumbers accessory pack | 39090 |

For full product codes, please speak to Customer Services on 08705 626400.

## TILE VENT TERMINALS



Available in a wide range of colours and finishes, provides for high/low level roof space ventilation. Suitable for natural soil, or mechanical ventilation (except Ashmore)†.

| | |
|---|---|
| **Terminals (with spigot)** | |
| Mendip (illustrated above) | 294 |
| Edgemere | 259 |
| Modern | 295 |
| Wessex | 296 |
| Ludlow Major/EcoLogic | 297 |
| Double Roman | 298 |
| Flexible pipe | 39091 |
| **Ventilation roof tiles (with catchment tray)** | |
| Ashmore | 263 |

Available in all colours to match main tiles.

† Minimum pitch of tile will apply.

## CONTOUR IN-LINE VENTS



Discreet high performance vent terminals for high/low level roof space ventilation. Suitable for soil and mechanical ventilation. Minimum roof pitch 22.5° (except Plain tiles 35°).

| | |
|---|---|
| **Contour tile vents** | |
| Mendip | 452* |
| Ashmore | 450* |
| Plain | 455* |
| Edgemere | 465* |
| Modern | 451* |
| Wessex | 459* |
| Ludlow Major/EcoLogic | 456* |
| Double Roman | 453* |
| Ludlow Plus | 457* |
| Anglia | 460* |
| Flexible pipe | 39091 |

* Suffix with colour code 01 Grey, 03 Brown, 05 Red

# Here to help

Getting our knowledge to you and your project smoothly and efficiently

## CUSTOMER SERVICES

Knowledgeable and friendly staff are available to offer quotations, expert advice, deal with orders and all other enquiries.
Account customers call 08705 626400
Non-account customers call 01283 722588

## TECHNICAL ADVICE

Our Technical Advisory Service is staffed by a qualified team with specialist knowledge. Call 01283 722588 or e-mail info@marley.co.uk

## TOOLS

Tools and assets that make design and specification as straightforward as possible.

ROOF SYSTEM SELECTOR
Easy-to-use and comprehensive system finder delivering results from choice of pitch, material or tile type: marley.co.uk/productselector

SPECIFICATION TOOLS
Specrite, Estimator and Tilefix are online tools designed to give the specifier and installer all the specifiaction and installation help they need:
marley.co.uk/specrite marley.co.uk/estimator marley.co.uk/tilefix

## RESOURCES AND TRAINING

SAMPLES
Samples of clay and concrete interlocking and plain tiles are available on request. Call 01283 722588 or visit marley.co.uk/samples

FIXING INSTRUCTIONS AND LITERATURE
Comprehensive sitework, fixing and installation literature and videos: marley.co.uk/resources
All current product and technical literature can be downloaded: marley.co.uk/downloads

CPDS
A range of Continuous Professional Development roofing seminars accredited by the RIBA CPD Certification Service. For more information or to make a booking: marley.co.uk/cpd

TRAINING
Theoretical, practical, engaging and informative training available at three locations nationwide: marley.co.uk/training

# MINIMUM BANDED QUANTITIES

## CLAY PLAIN TILES

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| Canterbury handmade tiles | n/a | n/a | 860 |
| Canterbury handmade eaves | n/a | n/a | 860 |
| Canterbury handmade gables | n/a | n/a | 560 |
| Ashdowne tiles | 11 | 105 | 1155 |
| Ashdowne eaves | 15 | 100 | 1500 |
| Ashdowne tile and a half | 12 | 63 | 756 |
| Acme/Hawkins tiles | 12 | 105 | 1260 |
| Acme/Hawkins eaves | 15 | 100 | 1500 |
| Acme/Hawkins tile and a half | 12 | 63 | 756 |
| Creasing tiles* | 12 | 105 | 1260 |

## CLAY INTERLOCKING TILES

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| Lincoln tiles | 4 | 88 | 352 |
| Lincoln LH verge tiles | 4 | 88 | 352 |
| Maxima tiles* | 4 | 60 | 240 |
| Maxima LH verge tiles | 4 | 20 | 80 |
| Melodie tiles* | 6 | 40 | 240 |
| Melodie LH verge tiles | 6 | 20 | 120 |

## CONCRETE TILES

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| Plain tiles | 10 | 90 | 900 |
| Plain eaves/top | 10 | 120 | 1200 |
| Plain tile and half | 10 | 54 | 540 |
| Anglia | 38 | 12 | 456 |
| Ashmore | 6 | 46 | 276 |
| Double Roman, Mendip & Wessex | 32 | 6 | 192 |
| Edgemere Range | 40 | 6 | 240 |
| Ludlow Major | 36 | 6 | 216 |
| Ludlow Plus | 43 | 12 | 516 |
| Modern & Duo Modern | 32 | 6 | 192 |

## CONCRETE FITTINGS

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| Segmental ridge tiles | 5 | 24 | 120 |
| Modern ridge tiles | 5 | 28 | 140 |

## JB-RED BATTENS

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| 19 x 38mm** | 10 | 70 | 700 |
| 19 x 50mm** | 10 | 55 | 550 |
| 25 x 38mm** | 10 | 56 | 560 |
| 25 x 50mm** | 10 | 44 | 440 |

## SHINGLES AND SHAKES

| | No. per band | Bands per pallet | Quantity per pallet |
|---|---|---|---|
| Shingles*** | 120 | 24 | 2880 |
| Shakes*** | 44 | 20 | 880 |

* Available as full pallets only
** Minimum order - 4 packs
*** Bundle quantities are approximate

# MANUFACTURING & STOCKING LOCATIONS

## 1 GLASGOW

Marley Ltd, Kirkintilloch Road,
Cadder, Bishopbriggs, Glasgow G64 2PY

Open for collections
Mon-Thur: 6:30am - 3:00pm
Fri: 6:30am - 2:00pm

## 2 GAINSBOROUGH

Marley Ltd, Old Shipyard, Beckingham,
Gainsborough DN21 1NG

Open for collections
Mon-Fri: 9:00am - 11:00 and
14.00 - 16.00

## 3 KEELE

Marley Ltd, Ridgehill Drive,
Madeley Heath, Crewe,
Cheshire CW3 9LY

Open for collections
Mon-Fri: 7:30am - 4:00pm

## 4 BURTON


Marley Ltd, Lichfield Road,
Branston, Burton upon Trent DE14 3HD

Open for collections
Mon-Thur: 7:00am - 3:00pm
Fri: 7:00am - 2:00pm

## 5 BRIDGEND

Marley Ltd, St Mary's Hill,
Mynydd Ruthin, Bridgend,
Mid Glamorgan CF35 5DU

Open for collections
Mon-Fri: 8:00am - 4:00pm

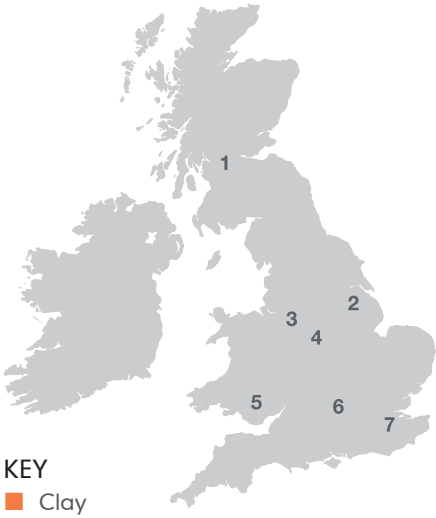


KEY
- Clay
- Clay (limited selection)
- Concrete
- Timber

## 6 BEENHAM

Marley Ltd, Grange Lane, Bath Road,
Beenham, Reading RG7 5PU

Open for collections
Mon-Fri: 7:00am - 3:30pm

## 7 WROTHAM*

Marley Ltd, London Road, Wrotham,
Kent TN15 7RW

Open for collections
Mon-Fri: 7:30am - 4:00pm

* Please note: clay tiles are only available for collection in full pallets.

This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

# Tell me more

Call 01283 722588
Email info@marley.co.uk
Or visit marley.co.uk

Marley, Lichfield Road, Branston, Burton upon Trent, DE14 3HD