Tree protection fence detail in accordance with BS 5837.

TREE PROTECTION FENCING

1. STANDARD SCAFFOLD POLES.
2. UPRIGHTS TO BE DRIVEN INTO THE GROUND.
3. PANELS SECURED TO UPRIGHTS WITH WIRE TIES AND WHERE NECESSARY STANDARD SCAFFOLD CLAMPS.
4. CHESTNUT PALE FENCE WIRED TO THE UPRIGHTS AND HORIZONTALS.
5. STANDARD CLAMPS.
6. WIRE TWISTED AND SECURED ON INSIDE FACE OF FENCING TO AVOID EASY DISMANTLING.
7. GROUND LEVEL.
8. APPROX. 0.6M DRIVEN INTO THE GROUND.

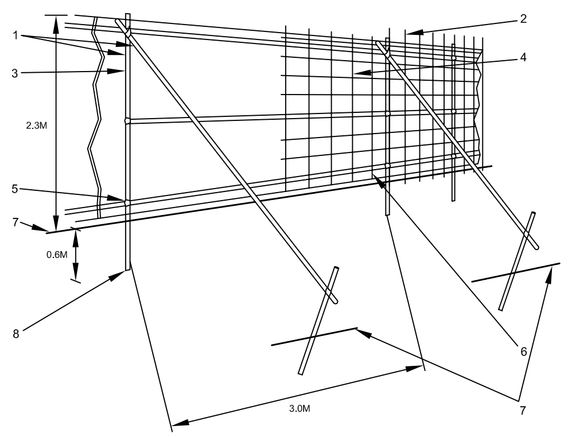

GENERAL NOTES:
1. DO NOT SCALE FROM THIS DRAWING. DIMENSIONS GOVERN
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE
3. ALL DIMENSIONS SHALL BE VERIFIED ON SITE BEFORE PROCEEDING WITH THE WORK
4. PLINCKE LANDSCAPE SHALL BE NOTIFIED IN WRITING OF ANY DISCREPANCIES
5. ALL DIMENSIONS ARE NOMINAL DIMENSIONS
6. PLINCKE LANDSCAPE LIMITED ACCEPT NO LIABILITY FOR ANY EXPENSE LOSS OR DAMAGE OF WHATSOEVER NATURE AND HOWEVER ARISING FROM ANY VARIATION MADE TO THIS DRAWING OR IN THE EXECUTION OF THE WORK TO WHICH IT RELATES WHICH HAS NOT BEEN REFERRED TOTHEM AND PRIOR APPROVAL OBTAINED

DRAWING NOTES:
1.
2.
3.
4.
5.

KEY:

- CATEGORY A TREES AND SHRUBS – HIGH QUALITY AND VALUE
- CATEGORY B TREES AND SHRUBS – MODERATE QUALITY AND VALUE
- CATEGORY C TREES AND SHRUBS – LOW QUALITY AND VALUE
- CATEGORY R TREES AND SHRUBS – REQUIRE FELLING BECAUSE OF CONDITION
- GROUPS OF TREES AND SHRUBS – QUALITY AND VALUE CATEGORY AS COLOUR ROOT PROTECTION AREA AS CANOPY SPREAD
- TREE OUTLINED FOR REMOVAL
- LINE OF TREE PROTECTION FENCING SEE DETAIL

NB:Drawing to be read in conjunction with tree protection method statement BP4L_WOM_PLI_RP_01

NOTE:

All works concerning tree protection shall be in accordance with BS5837.

Any unavoidable excavation or works within the root protection area shall be overseen and approved by a qualified arboriculturalist

REV	DATE	COMMENTS	DRN	CHK	APP
P08	03.03.17	additional trees/scrub added as agreed with tree officer 06.02.17	MP	HB	HB
P07	02.02.17	existing trees/ tree labels superseded, crowns lines	MP	HB	HB
P06	25.10.16	footpath relocated, energy centre moved, site secure lines amended	DH	HB	HB
P05	14.09.16	FAMILY CENTRE RELOCATED	MP	HB	HB
P04	30.06.16	AMENDED TO LATEST LAYOUT. TREE PROTECTION/FENCE ADDED	DH	HB	HB
P03	23.06.16	AMENDED TO LATEST LAYOUT. TREE PROTECTION/FENCE ADDED	MP	HB	HB
P02	20.05.16	AMENDED TO LATEST LAYOUT	MP	HB	HB
P01	19.05.16	FIRST ISSUE	MP	HB	HB

plincke

LEAMINGTON t: 01926 886 477 f: 01926 882 455 e: info@plincke.co.uk
LONDON t: 020 7739 3300 f: 020 7739 3335 e: london@plincke.co.uk
MANCHESTER t: 0161 237 9323 f: 0161 237 9336 e: north@plincke.co.uk
WINCHESTER t: 01962 842 828 f: 01962 820 484 e: south@plincke.co.uk

PROJECT:
BARNSLEY BSF

TITLE:
WOMBWELL & FOULSTONE
TREE PROTECTION PLAN

CONTRACT: LOR	
SCALE: 1:1000@ A1	STATUS: Draft
DRAWING: BP4L_WOM_PLI_DR_91_SW_00_05	
DATE: 05.10	DRN: ME / CHK: HB / APP:
REVISION: P06	DRAWING: W10-09-02
FILE:	