


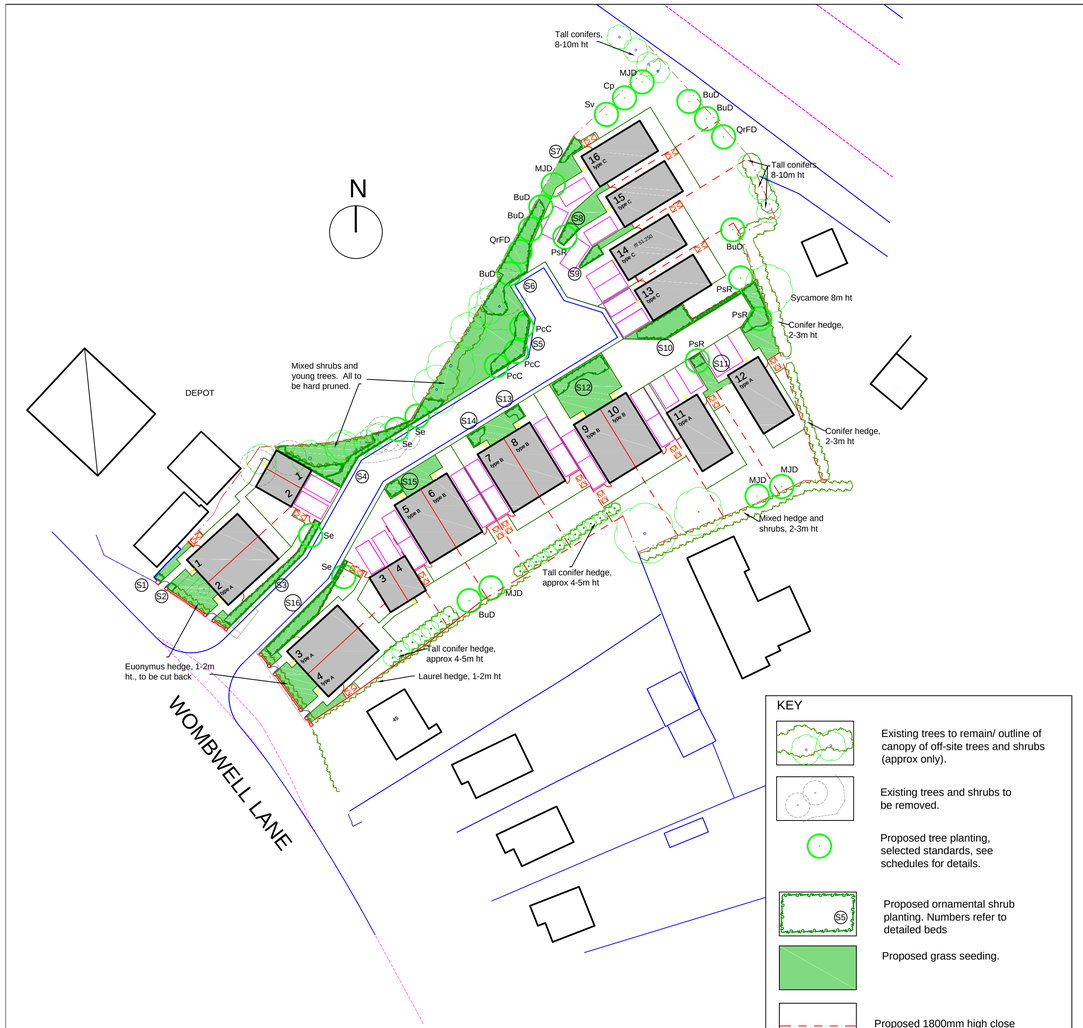

PREPARATION AND PLANTING

All plant material shall conform to BS3936 Parts 1and 4 and BS 4428.

Topsoil to comply with BS3882, 1994.
Organic matter to be proprietary shrub planting compost, or approved compost derived from recycled organic matter.
Slow release fertiliser to be 'Enmag' or similar.

Tree planting

1 Trees to be planted into pits of an appropriate size to accommodate the root system without restriction.
2 Selected standard trees to be single staked using a 75mm diam machine rounded stake secured to stake by proprietary rubber tree tie with spacer. Finished height of all stakes shall not exceed 1/3 height of tree above ground.
3 Tree pits to be back-filled with topsoil mixed with compost at a ratio of 3 parts soil to 1 part compost. 150gms slow release fertiliser to be added to each pit.

Shrub planting.

1 Shrubs to be planted into 400mm depth of high quality topsoil complying with BS3882, 1994.
2 Organic matter to be spread over planting area and cultivated into soil to a min 400mm depth.
3 Shrubs to be planted into prepared soil in pits large enough to accomodate full rootball.
4 Finished beds to be lightly forked over and dressed with 75mm depth coarse forest bark mulch.

Amenity grass seeding.

1 A minimum of 100mm of clean topsoil to be spread over all areas of proposed amenity grass seeding.
2 Area to be cultivated using a disc harrow or rotovator, to 100mm depth then further cultivated to 50mm depth and rolled to produce a firm seed bed.
3 Pre-seed fertiliser to be applied at 50gm/m² and incorporated.
4 A low maintenance fescue/bent seed mix to be sown. Eg: Germinal, A4 at 35gm/square metre.

AFTERCARE - 5 YEARS

Trees

1 Keep an area 1m in diam free from weed growth around all trees
2 Annually apply a slow release fertiliser in spring in years 1 -4.
3 Replace all failures.
4 Prune all damaged or broken branches.
5 Check and adjust as necesary all tree ties and stakes.

Shrub areas.

1 Keep all area free from weed growth by hand pulling or herbicide treatment
2 Annually apply a slow release fertiliser in spring in years 1 -4.
3 Replace all failures.
4 Prune all damaged or broken branches. Prune all shrubs overhanging footpaths.
5 Top-up mulch in years 2 and 4 to maintain 75mm depth.

Grass areas

First cut to take place when sward is 4 to 8 cm high. Areas to be lightly rolled and stone-picked prior to cutting. Thereafter amenity grass to be cut regularly throughout the growing season.

Watering

In years 1-3, water plants in periods of prolonged dry weather at the following rates.
Trees 30 litres per tree
Shrubs 10 litres per plant.
Watering to be undertaken in early morning or evening, avoiding periods of bright sunshine or windy conditions.

PHASING

All trees and to be planted in the first dormant season (Nov to March) after completion of construction.
All shrub material, bare root and container plants, to be planted in the first March after completion of construction.
All grass to be seeded in the first season following completion of construction. Between end May and End June or September.

TREE SCHEDULE

Qty	SPECIES	Form	Girth (cm)	Ht (m)	Root
7	Betula utilis 'Doorenbos' (BuD)	Selected std	10-12	3.0-3.5	RB
1	Crataegus prunifolia (Cp)	Selected std	10-12	3.0-3.5	RB
5	Malus 'John Downie' (MJD)	Selected std	10-12	3.0-3.5	RB
4	Prunus sargentii 'Rancho' (PsR)	Selected std	10-12	3.0-3.5	RB
3	Pyrus calleryana 'Chanticleer' (PcC)	Selected std	10-12	3.0-3.5	RB
2	Quercus robur 'Fastigiata Dila' (QrFD)	Selected std	10-12	3.0-3.5	RB
4	Sorbus x Embley (Se)	Selected std	10-12	3.0-3.5	RB
1	Sorbus vilmorinii (Sv)	Selected std	10-12	3.0-3.5	RB

SHRUB SCHEDULE

Qty	Name	Abbrev	Height	Cntr	Ctrs
42	Berberis thunbergii 'Atropurpurea Nana'	Brb th AN	30-40cm	3L	0.500
62	Bergenia 'Silver Light'	Brgn SL		1L	0.400
3	Clematis 'Nelly Moser'	Clmt NM	60-80cm	2L	1.000
131	Escallonia 'Apple Blossom'	Escl AB	40-60cm	3L	0.500
100	Euonymus 'Silver Queen'	Eny SQ	20-30cm (D)	2L	0.408
89	Hebe brachysiphon 'White Gem'	Heb WG	30-40cm		0.500
12	Hedera helix 'Glacier'	Hdr hl G	40-60cm	2L	1.000
238	Lavandula angustifolia 'Munstead'	Lav Mun	20-30cm	3L	0.450
125	Lonicera 'May Green'	Lon MG	30-40cm	3L	0.500
29	Perovskia atriplicifolia 'Blue Spire'	Prv at BS	15-20cm	1.5-2L	0.450
99	Photinia x fraserii 'Red Robin'	Phot RR	40-60cm	3L	0.400
22	Pyracantha 'Orange Glow'	Pyrc OG	60-80cm	3L	1.000
79	Rudbeckia fulgida 'Goldsturm'	Rdb fl G	8-10cm	0.5L(P9)	0.400
13	Skimmia japonica 'Rubella'	Sk Rub	30-40cm	3L	0.500
91	Spiraea bumalda 'Goldflame'	Sp GF	30-40cm	3L	0.500
18	Vinca minor 'Alba'	Vmn Al	20-30cm	2L	0.400

cf Landscape
Oakleigh, Healey Road, Ossett, West Yorkshire WF5 8LN
Tel 01924 281164. e-mail info@cflandscape.co.uk www.cflandscape.co.uk

client: Ashmount Homes Ltd

project: Residential development at 41 Wombwell Lane Barnsley

drawing title: Landscape proposals

scale	date	drwn by	drawing no
As shown @ A1	Jun 15	CTF	A/B/412/1