

PROPOSED CHANGE OF USE FROM DWELLING TO SHOP (BEAUTY SALON) at No 5 CLARENDON STREET, BARNSLEY for Mrs. R. COOPER. Scale ~ 1:50


AMENDED PLAN No 2009/

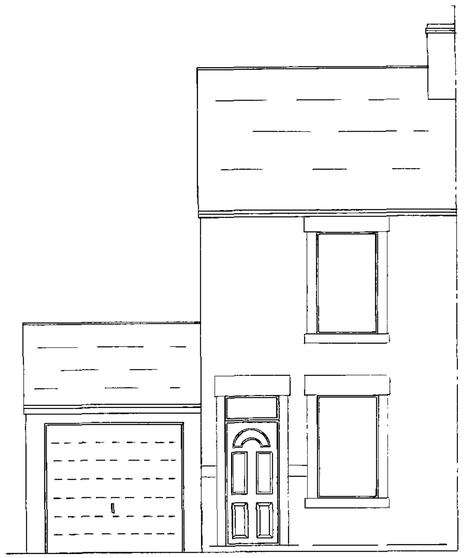

EXISTING FRONT ELEVATION

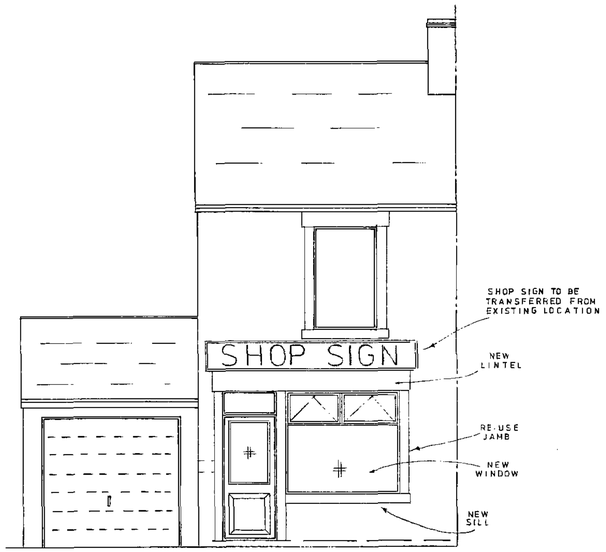

PROPOSED FRONT ELEVATION

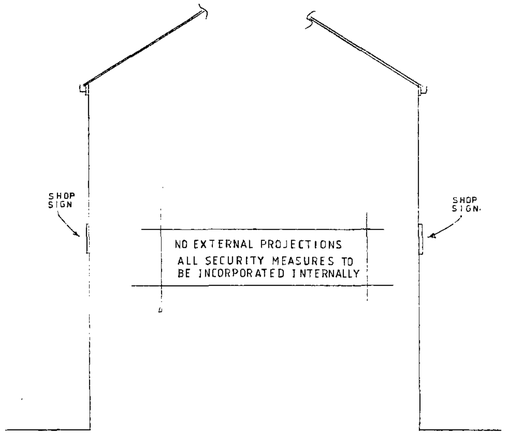

PROPOSED SIDE ELEVATION

PROPOSED SIDE ELEVATION

All measurements in mm (eg 150) unless stated.


WORKS: Remove existing door & window and masonry between & to side of window.
P+F replacement door & new window in enlarged opening.
P+F new proprietary galvanised m.s. lintel over.
P+F sill, jamb & cosmetic lintel to match existing.

WINDOWS: to be double glazed with soft low-E coating & achieve U-value of 1.80 W/m²K (Pilkington K or equivelant) & draught stripped; 1/20 of floor area to open & be fitted with trickle ventilation min area 5000mm² equivalent area or 'Espagnolet' double catch locking mechanism.
Safety glazing (BS6206 1981) to external doors & windows less than 800 above F.F.L. or within 300 of any door ... #

LINTELS: Contractor to use the following lintels dependant on cavity width & inner leaf thickness [max opening]:-

CATNIC:	CG90/100 [3600];	CN14A [2400];	CN14C [4500]
	CG70/100 [3600];	CN3A [2400];	CN4C [4500]
	CG50/100 [3600];	CN7A [2400];	CN8C [4500]
KEYSTONE:	P/K-90 [2700];	S/K-90 [4500]	
	P/K-70 [2700];	S/K-70 [4500]	
	P/K-50 [2700];	S/K-50 [4500]	
I.G.:	L1/S80 [4500];	L1/S70 [4500];	L1/S [4500]

Reposition existing electric meter box.

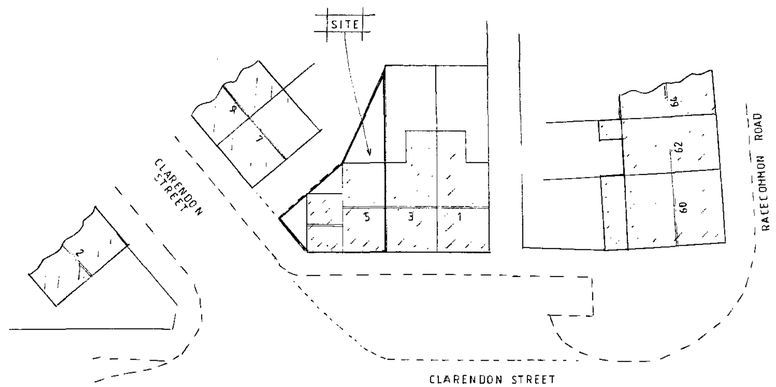

SITE PLAN 1:250