


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.950	18.900
Flush-Flo™	0.327	18.873
Kick-Flo®	0.688	16.216
Mean Flow		15.836

Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Variable flow rate post installation via adjustable inlet
- Indicative Weight: 30 kg

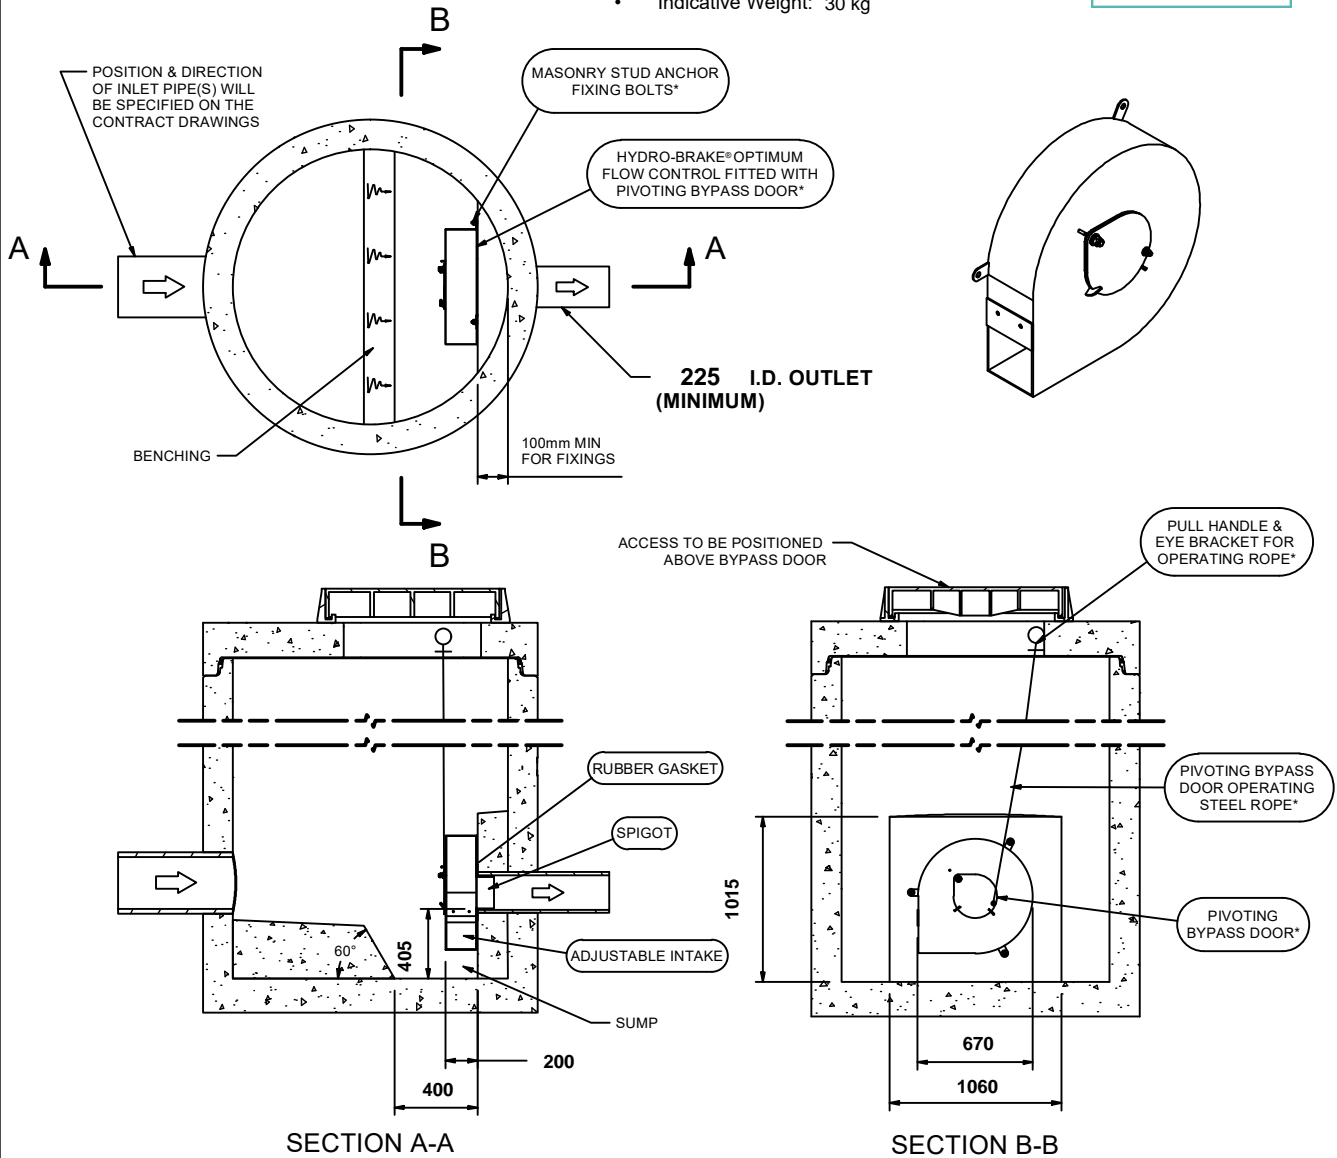

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW
 CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE 	The head/flow characteristics of this SHE-0194-1890-0950-1890 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve. The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.		 Hydro International A CRH COMPANY
	DATE	27/03/2025 13:32	
	SITE	Royston WMC	
	DESIGNER	Shaun Tonge	
REF		SHE-0194-1890-0950-1890 Hydro-Brake® Optimum	