



+ 99.72 = existing ground level
+ 99.72 = proposed ground level

255 x 125 PCC Marshalls
concrete kerb on 300x100
OPC kerb race 35N/mm²

SECTION THRO' KERB

re-erect
existing
fence.


SECTION A-A

existing wall removed
and top reduced to
450mm below car
park surface height.
Surfacing continued
over to neat straight
edge.

1:20

Actual depth of foundations to be determined on site.
All work to be to the satisfaction of the local authority.
All dimensions to be checked on site and any discrepancies must be notified immediately.
All dimensions are in millimetres unless otherwise stated.
Information given on this drawing is subject to local authority approval.
Do not scale this drawing.

PROJECT
MANAGEMENT
services

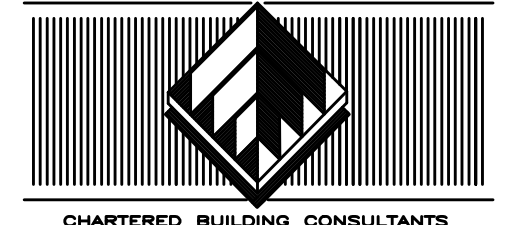

4 HUDDERSFIELD ROAD, BARNSLEY, SOUTH YORKSHIRE S70 2LT
TELEPHONE (01226) 286276
FAX (01226) 731265 E-mail: info@pmsdesign.co.uk
CLIENT

PRIORY CAMPUS

PROJECT EXTENDED CAR PARK
LEVELS & DETAILS

FILE NAME	DWG.No	SCALE	DATE	DRAWN	REV.
Prory Campus Car Park. dwg	2383/03	varies	01/2014	jjb	