



Fläkt Woods Limited

Technical Data Sheet MaXfan Compac



Quotation Number	:	Project Code	:
Project Name	:	Customer	:
Item Reference:	:	Date:	: Wednesday, May 31, 2023

Fan Code	63 MaXfan Compac
Fan Diameter / Size	630 Size / mm
Fan Speed	2900 rpm
Velocity	6.6 m/s
Blade Angle	12°
Installation Type / Form of Running	C / AB (Vertical)
Fan Casing	Long
Requested Duty	2.1m³/s @ 725 Pa (static)
Actual Duty	2.06m³/s @ 695 Pa (static)
Outlet Dynamic Pressure	26 Pa

Duty Shaft Power	2.53 kW
Max Shaft Power	2.58 kW
Total Efficiency	58.7 %

Motor Frame	90L [Class F]
Motor Rating	2.64 kW [IE2]
Full Load Current	9.36 A
Starting Current	52.8 A
Motor Mounting	Pad
Electrical Supply	220-240 Volts 50 Hz 1 Phase
Start Type	DOL
Motor Winding	Standard
Enclosure	Standard All

ErP [FMEG] Rating	N 52 (ErP Compliant 2015)
ErP [FMEG] Target	N 50
FMEG Blade Angle [Range]	0° [0° - 0°]
Measurement Category	C (Static)
VSD	N
Fan + Motor Efficiency	48.9% (2.6 m³/s @ 591 Pa)
Motor Input Power (ErP)	3.14 kW

SFP value	1.48 W/(l/s) @ Actual Duty
Power from mains	3.05 kW
Energy Consumption	9150 kWh (3000 h/year)
Running Cost / Year	£1098

Air Density	1.2 kg/m³ / 20 °C / 0 m / 50% RH
Smoke Venting	Non Smoke Venting
Product Number	EJ623236

Performance data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with ISO 5801 and is specifically applicable for Ducted installations. When an electronic controller is incorporated, enhanced motor noise can occur - particularly when the operating speed is well below maximum. FWL therefore recommend using an auto transformer speed controller for noise sensitive applications. Bifurcateds are Erp exempt when used continuously at >100C. They are not for use in the EEA at lower temperatures.

The MaXfan Compac includes a preprogrammed inverter drive to operate via 1 phase supply, offering full speed control and optimised performance.

Acoustic data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with BS 848 Pt 2, 1985 / BS EN ISO 5136 under Ducted conditions. The single figure provided is the overall Inlet sound pressure level at the specified distance, under spherical, free field conditions.

Acoustic figures for adjusted running speeds have been interpolated and are for reference only.

This Offer is made subject to the latest version of our A100-19 Terms and Conditions, a copy of which can be made available on request. Our lead times will be re-confirmed on receipt of manufacturing release and may be subject to change.

	Sound Spectrum (Hz)								Overall	
	63	125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 m**
Inlet*	91	101	100	101	99	96	92	89	107	83
Outlet*	92	104	102	101	99	96	94	91	108	83
Breakout*	82	83	76	76	74	69	75	67	87	60

* Lw dB re 10⁻¹² W

** dBA re 2x10⁻⁵ Pa

Sound data at actual duty.

Description	Qty
Fan	
EJ623236 - 63 MaXfan Compac	1
Accessories	
Inverter	1
Thermistors	1

Unit 1 Droicon Industrial Estate

, Birmingham, B65 9BY

Tel: 0121 796 2112 Fax: 0121 796 2113


Printed on 31 May 2023

Website:

Email: jason@nfan.co.uk


Copyright Fläkt Group 2003 - 2020

Selection Engine: 3.1.3.51p



Project Code :
Customer :
Date: : Wednesday, May 31, 2023

Air Density	1.2 kg/m ³ / 20 °C / 0 m / 50% RH
Smoke Venting	Non Smoke Venting
Product Number	EJ623236

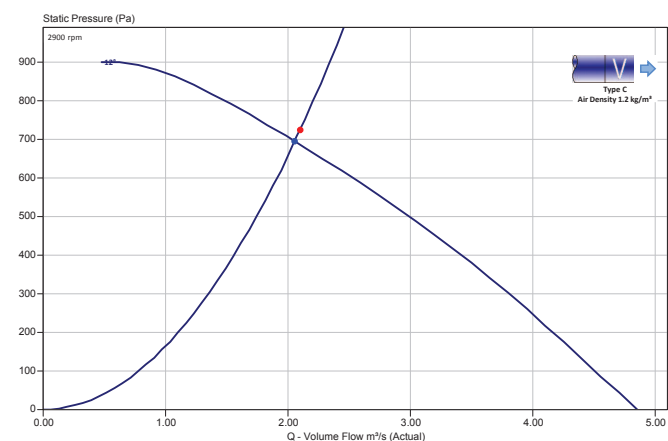


	Sound Spectrum (Hz)								Overall	
	63	125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 m**
Inlet*	91	101	100	101	99	96	92	89	107	83
Outlet*	92	104	102	101	99	96	94	91	108	83
Breakout*	82	83	76	76	74	69	75	67	87	60

* Lw dB re 10⁻¹² W
 ** dBA re 2x10⁻⁵ Pa
 Sound data at actual duty.

This Offer is made subject to the latest version of our A100-19 Terms and Conditions, a copy of which can be made available on request. Our lead times



Unit 1 Droicon Industrial Estate
 , Birmingham, B65 9BY
 Tel: 0121 796 2112 Fax: 0121 796 2113

Email: jason@nfan.co.uk
Copyright Fläkt Group 2003 - 2020
Selection Engine: 3.1.3.51p



Project Code :
Customer :
Date: : Wednesday, May 31, 2023

Air Density	1.2 kg/m ³ / 20 °C / 0 m / 50% RH
Smoke Venting	Non Smoke Venting
Product Number	EJ623236

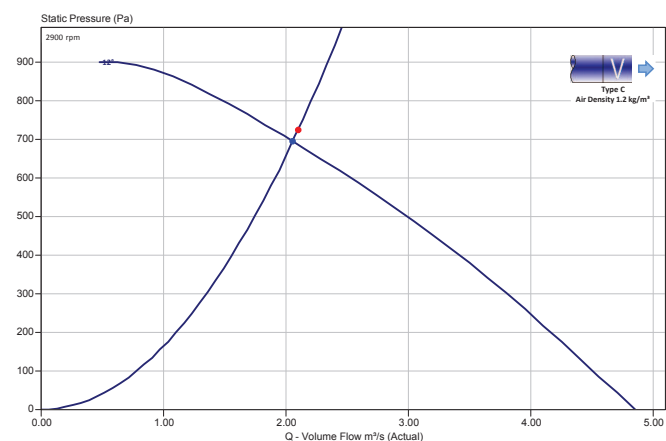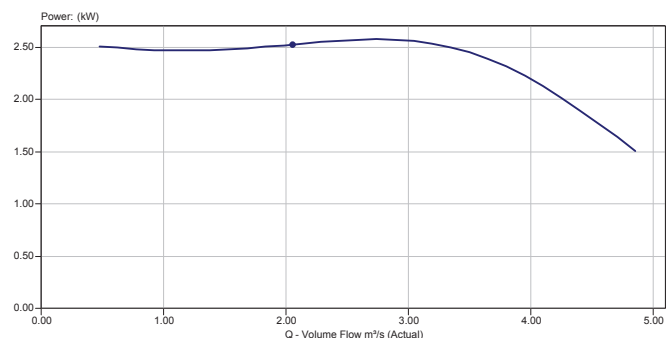

	Sound Spectrum (Hz)								Overall	
	63	125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 m**
Inlet*	91	101	100	101	99	96	92	89	107	83
Outlet*	92	104	102	101	99	96	94	91	108	83
Breakout*	82	83	76	76	74	69	75	67	87	60

* Lw dB re 10⁻¹² W
 ** dBA re 2x10⁻⁵ Pa
 Sound data at actual duty.

Sound data at actual duty.



will be re-confirmed on receipt of manufacturing release and may be subject to change.

Unit 1 Droicon Industrial Estate
 , Birmingham, B65 9BY
 Tel: 0121 796 2112 Fax: 0121 796 2113
 Printed on 31 May 2023

Website:
 Email: jason@nfan.co.uk
 Copyright Fläkt Group 2003 - 2020
 Selection Engine: 3.1.3.51p




Quotation Number	:	Project Code	:
Project Name	:	Customer	:
Item Reference:	:	Date:	: Wednesday, May 31, 2023
		Fan Code	: 63 MaXfan Compac

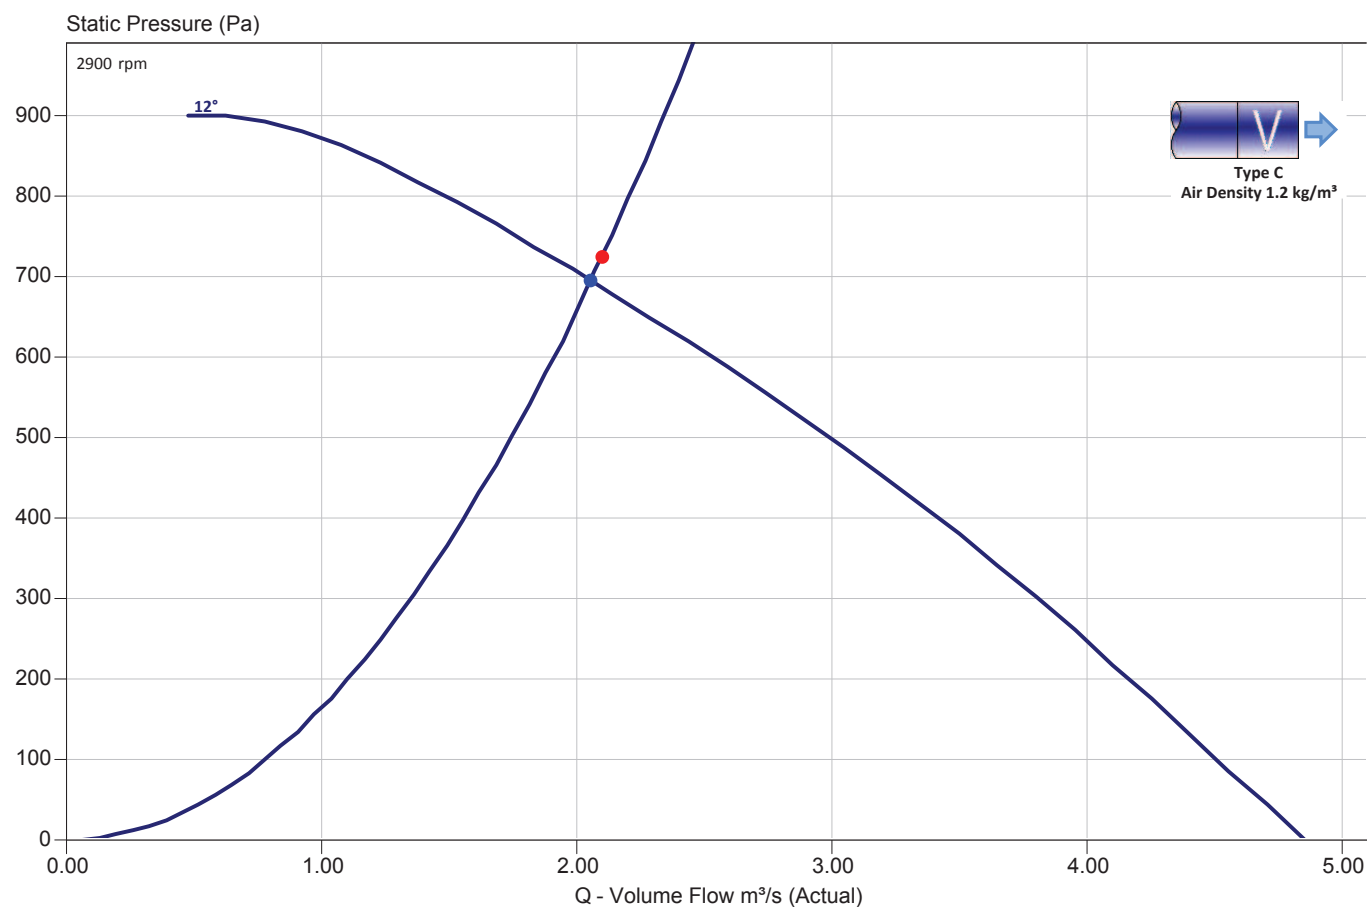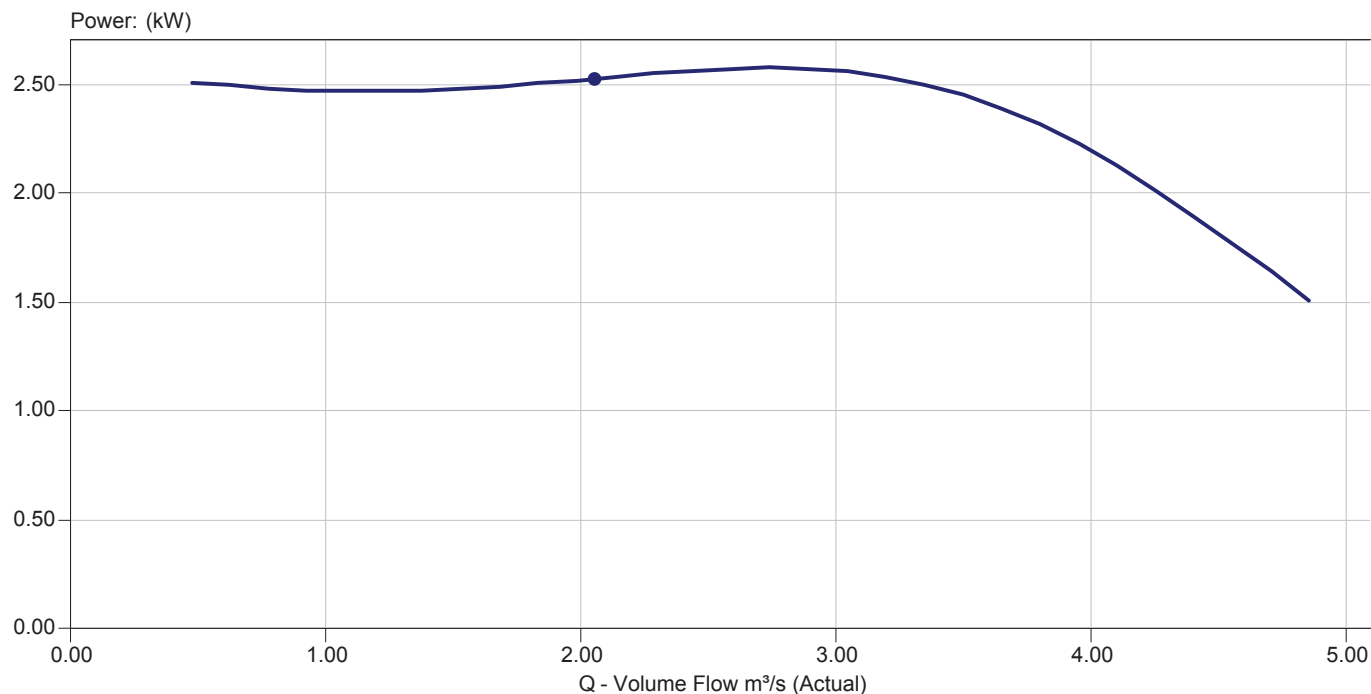



Quotation Number :
Project Name :
Item Reference :

Fan Code : 63 MaXfan Compac
Customer :
Date : Wednesday, May 31, 2023

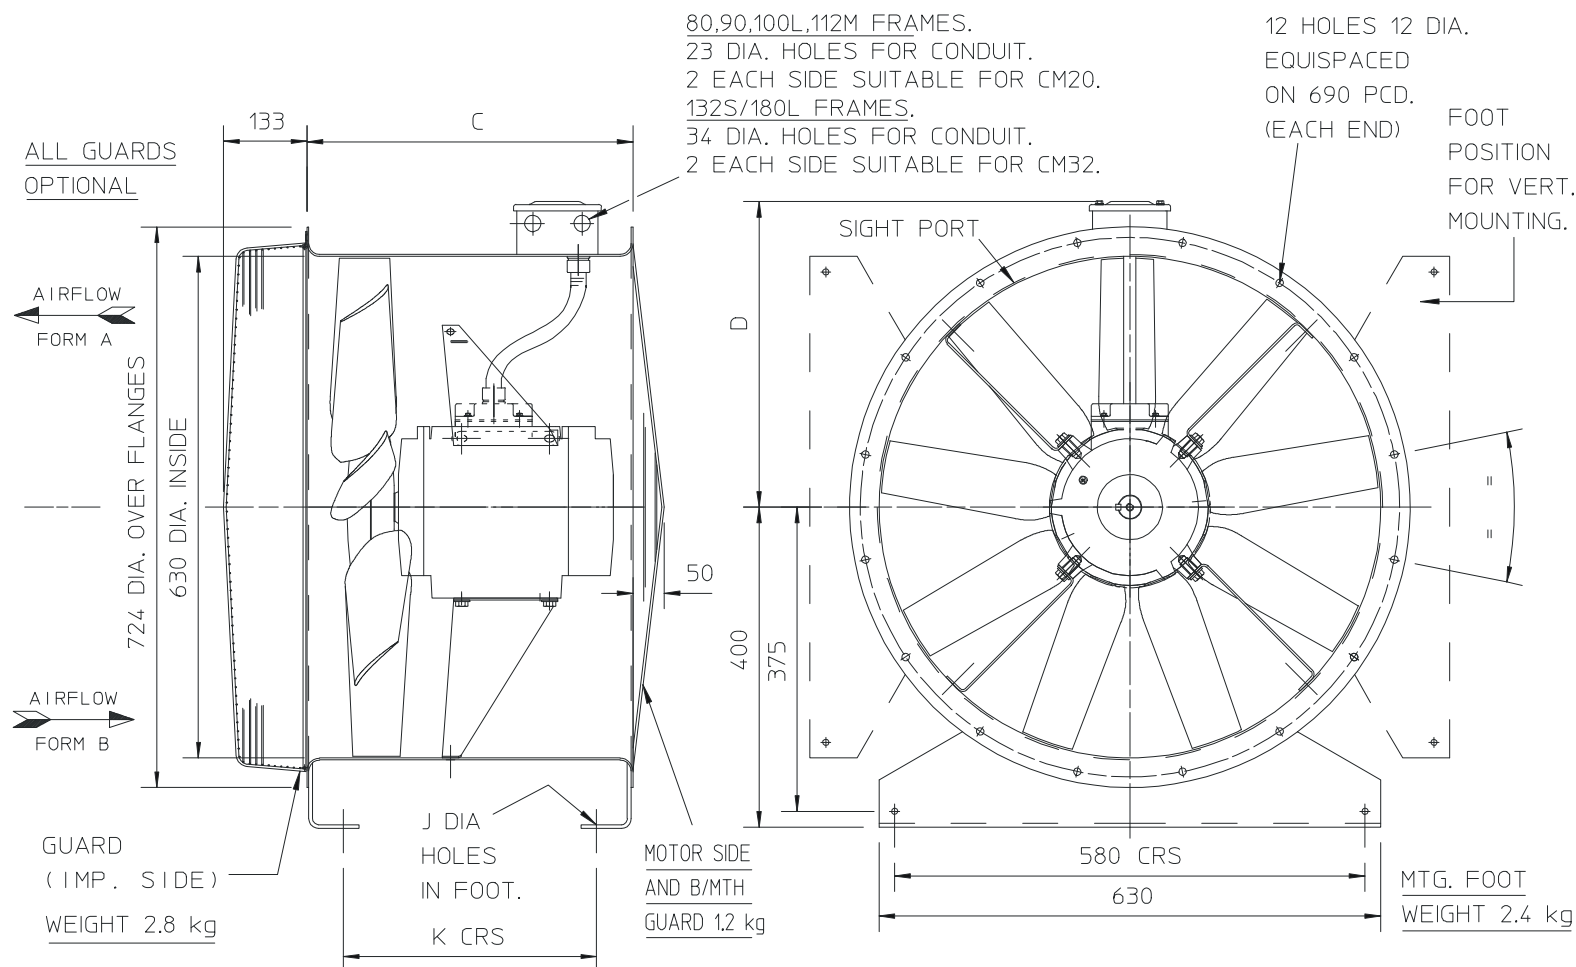

C	520
D	403
J	10
K	434
Weight (kg)	61

Notes : Dimensions shown in mm / Weight in kg

Reference:D275107

This drawing shows dimensions that should be used as a guide only and are subject to change. Certified drawings are available on request.