



INVESTOR IN PEOPLE

Technical Report

Ref Number **C/12327/R09/TJH**

Date **1 December 2009**

Project

**Barnsley BSF
Wind Turbine Noise Assessment
Dearne School**

Prepared for

**P Mills
Barnsley Partnership for Learning
Barnsley Digital Media Centre
County Way
Barnsley
S70 2JW**

By

Trevor Hickman *BSc MSc PhD MIOA*

Sound Research Laboratories Limited

Specialist Consultants: Acoustics – BREEAM – Fire – Air leakage

Head Office & Laboratory:

Holbrook House, Little Waldingfield, Sudbury, Suffolk CO10 0TH

Tel: +44(0)1787 247595 Fax: +44(0)1787 248420

e-mail: srl@soundresearch.co.uk

Summary

Surveys have been done to help assess the impact of noise from the proposed wind turbine installation at Dearne School on neighbouring dwellings. Surveys are reported of the measurement of background noise levels at different times of day and of the measurement of the variation of background noise with wind speed. The measurements have been assessed following the method recommended by the Working Group on Noise from Wind Turbines – Final Report (ETSU-R-97).

We conclude that at the dwellings closest to the proposed wind turbines, the ETSU criteria will be met at all wind speeds.



Trevor Hickman

For and on behalf of
Sound Research Laboratories Limited
Tel: 01787 247595
Email: trevor.hickman@soundresearch.co.uk



Richard Budd



Contents

- 1** Introduction
- 2** Proposed Wind Turbine Installation
- 3** Assessment Methodology
- 4** Wind Turbine Noise Levels
- 5** Background Noise Measurement
- 6** Assessment
- 7** Conclusions

Appendix 1

Plan Showing Measurement Locations

Appendix 2

Survey Details

Appendix 3

Survey Results

Appendix 4

Assessment Results

Appendix 5

Noise Measurement Parameter Definitions

1. Introduction

As part of the first phase of the BSF development for Barnsley, it is proposed to erect one or more wind turbines at each of the schools in the scheme. In seeking planning approval for this, it is necessary to have assessed the acceptability of noise from the wind turbines affecting the nearby residents. This report considers the noise impact from the operation of one or two wind turbines at Dearne School.

2. Proposed Wind Turbine Installation

As part of the redevelopment of Dearne School it is proposed to erect one or possibly two wind turbines on the school playing fields. They would be located between the new school building and local allotments along the eastern site boundary as indicated on the plan in Appendix 1. Dwellings along Goldthorpe Road, to the west of the site would be shielded from this location by the new buildings. To the north-east, dwellings along Windmere Avenue would have a clear view of the turbines at a distance of about 275 metres.

The type of wind turbine proposed is the Proven Energy WT 15000, with the turbine hub installed at 15 metres above ground level. The specifications for this turbine shows that it cuts in at a hub wind speed of 3m/s and starts overspeed control at 13m/s.

3. Assessment Methodology

The method of assessing noise impact on-site follows that recommended by the Working Group on Noise from Wind Turbines – Final Report (ETSU-R-97).

The wind turbine noise level, expressed as L_{A90} , is predicted at the most affected dwelling(s). If appropriate a tonal correction is made. These predictions are based on measurements done by an independent test organisation of noise output as a function of wind speed. In this case the measurements were done by TUV NEL to an industry protocol, the Small Wind Turbine Performance and Safety Standard (29 February 2008) published by BWEA (British Wind Energy Association).

The background noise level, also expressed as $L_{A90-10min}$, is measured at the dwelling(s). This must be done at different times and at wind speeds over the range at which the wind turbine is expected to operate, because the background noise level will vary with wind speed. The wind speed as a 10 minute average is measured simultaneously, at the recommended reference height of 10 metres above ground level, at a location representative of the proposed wind turbine siting. The corresponding wind speed at hub height of the proposed turbine is calculated by adjusting the measured speeds according to the equation given in the ETSU report.

The predicted wind turbine noise level is then compared with both

- fixed noise level criteria
- the background noise level as a function of wind speed

The corrected wind turbine noise is considered acceptable outside dwellings if it is no greater than:

- 35dB $L_{A90-10min}$ during the daytime
- 43dB $L_{A90-10min}$ during the night-time

or

- the background $L_{A90-10min}$ +5dB at any time

whichever is the higher.

4. Wind Turbine Noise Levels

The measured and declared sound power levels at 8m/s for the Proven Energy WT 1500 are 94.3 and 97 dBA (L_{WA}) with no tonal correction needed.

This is based on the measured noise levels which show a scatter of results at any given wind speed. Linear regression is done to derive the trend (equation of noise level versus wind speed) and standard deviation to measure the degree of scatter. The declared level is the calculated level at 8m/s plus 1.645 x the standard deviation.

The trend line is significantly different above and below an average speed of 9m/s, due to the way the turbine operates and interacts with the wind. The trend line is given by

$$L_{Aeq} = 1.94u + 46.64 \quad 3 \leq u \leq 9 \text{ m/s}$$

$$L_{Aeq} = 0.66u + 64.11 \quad 9 < u < 15 \text{ m/s}$$

where u is the wind speed at hub height.

The Working Party guidelines use the L_{A90} of the turbine noise as the index for assessment, using the relationship $L_{A90} = L_{Aeq} - 2\text{dB}$. They recommend assessment is done up to an average wind speed of 12m/s (at 10m height). They also recommend that the wind speed at the hub height (u_h) is calculated from the averaged wind speed at the reference height (u_{10}) of 10 metres using the relationship:

$$u_h/u_{10} = \ln\left(\frac{h}{z_0}\right)/\ln\left(\frac{10}{z_0}\right) \text{ where } z_0 \text{ is the roughness factor of the local ground cover.}$$

Examples of roughness factor that they give indicate a suitable value for this area to be of the order of $z_0 = 0.01$.

5. Background Noise Measurement

Ambient noise levels (L_{A90} and L_{Aeq}) were measured at different times of day and under different conditions as follows:

- i) During the middle of the night-time with no or low wind (below the speed at which the turbines would operate)
- ii) During the late evening, as being representative of the quietest part of daytime, with no or low wind
- iii) On at least two different days under different wind conditions. Measurements were done on different days in order to monitor a spread of wind speed within the range 3 to 12m/s
- iv) During the middle of the day under no or low wind conditions.

The measurements were located close to residential properties that were thought most likely to be affected by wind turbine noise. These were houses in Windmere Avenue as shown in the plan in Appendix 1. Also shown is the location of the wind monitor, which was on a mast at 10 metres above ground level. During the surveys during windy conditions ((iii) above), average wind speed measurements were made every 10 minutes to correspond with the 10 minute background noise level (L_{A90}) measurements.

The measurements of night-time and evening backgrounds were also made at houses in Goldthorpe Road, adjacent to the site of the proposed new buildings. This location will be shielded from the turbine noise, and the measurements were made for assessing other plant noise. Although the measurements are reported they are not assessed in this report.

The equipment used to make the measurements and other survey details are given in Appendix 2. The large spherical B&K windshield was used to prevent noise generated at the windshield invalidating the results. It is less affected than other commercially available windshields.

The results are tabulated in Appendix 3. Measurements of L_{Aeq} are included for information although not used in this assessment.

6. Assessment

The measured relationship between background noise and average wind speed (measured at 10m height) is plotted on figures 1 to 4 in Appendix 4. Linear and geometric regression (trend) lines have been calculated and superimposed on figures 1, 3 and 2, 4 respectively, together with the 'goodness' of fit (R). At low wind speeds the trend line goes below the measured 'no wind' background. In these circumstances the wind generated noise is not affecting the overall background level and is not included in the regression analysis.

The predicted turbine noise at the nearest residence is also superimposed on the plots. Figures 1 and 2 are for two turbines and Figures 3 and 4 for one turbine. This calculation is based on the trend line equations, given in section 4, and the wind speed adjusted to a height of 15m.

Under no or low wind conditions the wind was considered not to be affecting the background noise levels. The background noise levels during the daytime, at the time of day when wind noise was monitored, generally ranged from 40 to 42 dBL_{A90}. There were a couple of higher readings due to an ice-cream van nearby and a period of more sustained construction noise. Generally the construction noise was not noticeable or was not sustained enough to raise the L_{A90}. Background levels measured during the wind noise survey were slightly higher (42-45 dBL_{A90}) which indicate that they may have been affected by noise from other sources, such as construction, and not representative of wind generated noise. At higher wind speeds the background levels measured were around 50 dBL_{A90} and are representative of wind generated noise.

The plot of background noise versus wind speed shows an excellent correlation ($R > 0.975$). There is minimal difference between the linear and geometric regression curves over the range of measurement. As the wind speed drops, one would theoretically expect the wind generated noise to decrease to nothing ($-\infty$ dB) at zero wind speed, so a geometric fit might be better. However, other sources will determine the background noise level well before this point is reached.

With no or very low wind the lowest background (L_{A90}) levels measured were as follows:

Daytime (evening) –	35 dBL _{A90}
Night-time –	29 dBL _{A90}

The impact of two turbines will be considered. The noise from one turbine will be 3 dBA lower and have less of an impact.

Daytime:

- Lowest background is 35 dBL_{A90}
- Criterion for turbine noise is the higher of 35 dBL_{A90} and (background +5 dB)
- The lowest background +5 dB is 40 dBL_{A90}
- Therefore, the lowest daytime criterion for turbine noise is 40 dBL_{A90}, which they would reach at a wind speed of just over 8m/s at the reference height of 10m above ground level level.
- At this wind speed of 8m/s (10m), the background noise (+5 dB) would be >50 dBL_{A90}, well above the turbine noise level.
- At higher wind speeds the measured background noise is greater than the predicted turbine noise by a few dB. Therefore, the turbine noise would be well below the background +5 dB.

Night-time:

- Lowest background is 29 dBL_{A90}
- Criterion for turbine noise is the higher of 43 dBL_{A90} and (background +5 dB)
- The lowest background +5 dB is 34 dBL_{A90}
- Therefore, the lowest night-time criterion for turbine noise is 43 dBL_{A90}, which they would reach at a wind speed of around 8.5m/s at the reference height of 10m above ground level.
- At this wind speed of 8.5m/s (10m), the predicted background noise (+5 dB) would be >50 dBL_{A90}, higher than the turbine noise. At higher wind speeds, the measured background noise is greater than the predicted turbine noise by a few dB. Therefore, the turbine noise would be well below the background +5 dB.


Therefore, the data show that at all appropriate wind speeds the ETSU criteria would be met for either one or two turbines as proposed.

7. Conclusions

The measured data indicate that the ETSU criteria for the acceptability of wind turbine noise would be met at all wind speeds for both daytime and night-time with either one or two turbines located as proposed.

Appendix 1

Plan showing Measurement Locations

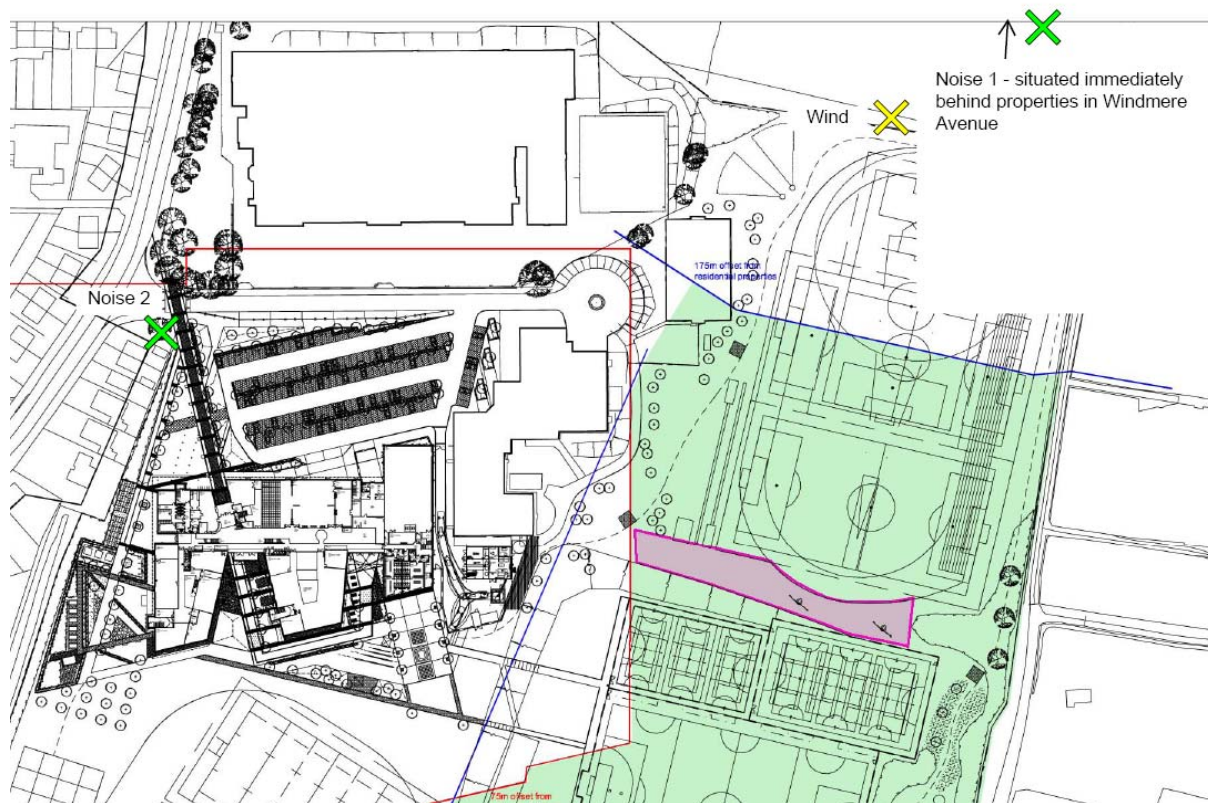

Appendix 2

Survey Details

A1. Location of Surveys

Dearne, Barnsley. For measurement positions see Appendix 1

A2. Dates & Type of Surveys

9 October 2009 - Daytime, moderate wind
18 October 2009 – Daytime, low/no wind
3 November 2009 – Evening, low/no wind
10 November 2009 – Night-time, low/no wind
19 November 2009 – Daytime, high wind

A3. Personnel Present During Surveys

Mark Hinds (9 October & 19 November 2009)
Ryan Arbabi (18 October 2009)
Mark Graham (3 & 10 November 2009)

A4. Instrumentation

Bruel & Kjaer

Type 4231 Sound Level Calibrator, S/N 2528393, S/N 2482688
Type 2250 Sound Level Meter, S/N 2526736, S/N 2559287
Type 4189 Microphone, S/N 2529958, S/N 2556367
Type 4231, Sound Level Calibrator, S/N 2482655 & S/N 2327011
Type 2260 Sound Level Meter, S/N 2467018 & S/N 2370478
Type 4189 Microphone, S/N 2471146 & S/N 2616485

Davis

Type Vantage Pro 2 – 6152UK Weather Station, S/N A90708N037

A5. Calibration Procedure

Before and after the survey the measurement apparatus was check calibrated to an accuracy of ± 0.3 dB using the type 4231 Sound Level Calibrator.

A.6 Survey Procedure

Ambient noise levels and average wind speed were monitored at various positions around the site as shown in Appendix 1. The measurements are tabulated in Appendix 3, and explanations of the parameters used are listed in Appendix 5.

Appendix 3

Survey Results at Dearne School

Measured Ambient Noise Levels (dB re 2×10^{-5} Pa)

Evening/Night – No wind

Date Position	Time	L _{A90}	L _{Aeq}	Comments
03.11.09				
1	22:03	39	44	
	22:34	38	45	
	23:04	37	43	
	23:52	35	42	
2	22:18	39	57	
	22:50	37	55	
	23:26	37	56	
10.11.09				
1	02:04	29	40	
	02:36	35	46	
	03:11	30	40	
	03:40	29	40	
2	02:21	35	56	Passing cars
	02:53	31	38	
	03:25	33	54	Passing cars

Daytime, Weather – Sunny, low wind

Date Position	Time	L _{A90}	L _{Aeq}	Comments
18.10.09				
1	11:20	40	44	
	11:30	40	43	
	11:40	42	45	
	12:54	40	44	Restarted after rain
	13:05	41	46	
	13:20	41	43	
	13:30	42	46	
	13:49	45	49	Construction noise
	13:59	45	49	Ice-cream van
	14:18	41	44	
	14:30	41	45	
	14:41	42	47	

Daytime, Weather – Moderate Wind

Date Position	Time	L _{A90}	L _{Aeq}	Wind speed m/s@10m	Comments
09.10.09					
1	13:00	42	47	4.5	
	13:20	42	48	4.5	
	13:20	42	49	4.0	
	13:30	43	46	4.5	
	13:40 -14:20	-	-	-	Significant noise from playing fields
	14:30	42	50	4.9	Intermittent construction
	14:40	41	45	4.9	Intermittent construction
	14:50	41	46	4.5	Intermittent construction



Daytime, Weather – High Wind

Date Position	Time	L _{A90}	L _{Aeq}	Wind speed m/s@10m	Comments
19.11.09					
1	8:00 – 8:40				Constant construction noise and dogs barking
	8:50	50	54	9.8	
	9:00	51	55	11.2	
	9:10	50	56	10.3	
	9:20	50	54	10.7	
	9:30	50	54	9.8	
	9:40	49	53	9.8	
	9:50	49	54	10.3	
	10:00	49	54	10.3	
	10:10	50	54	10.3	
	10:20	50	55	11.2	
	10:30	-	-	-	Noise from school break



Appendix 4

Assessment Results

Figures 1 and 2 – Two Turbines

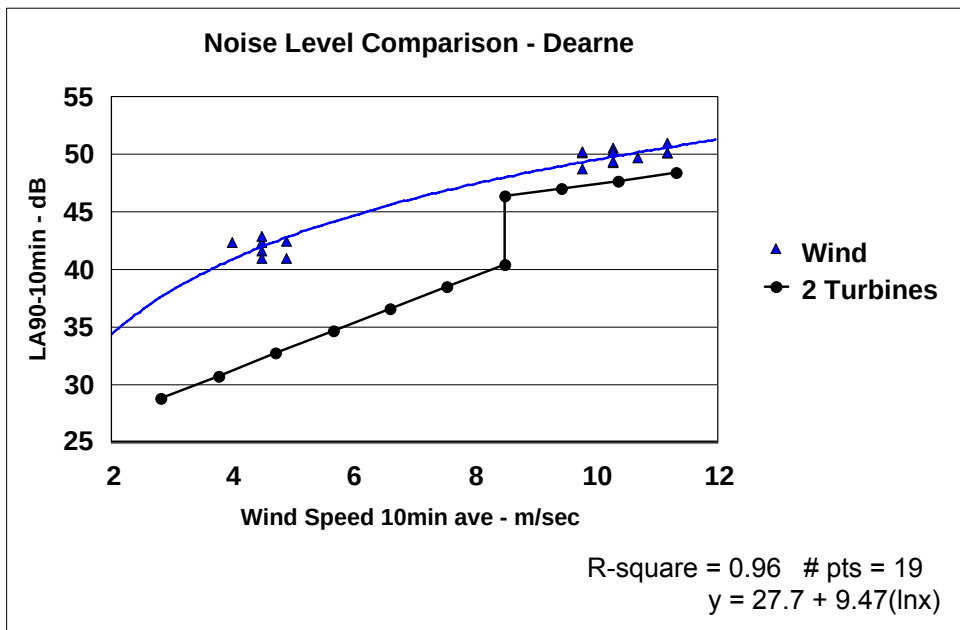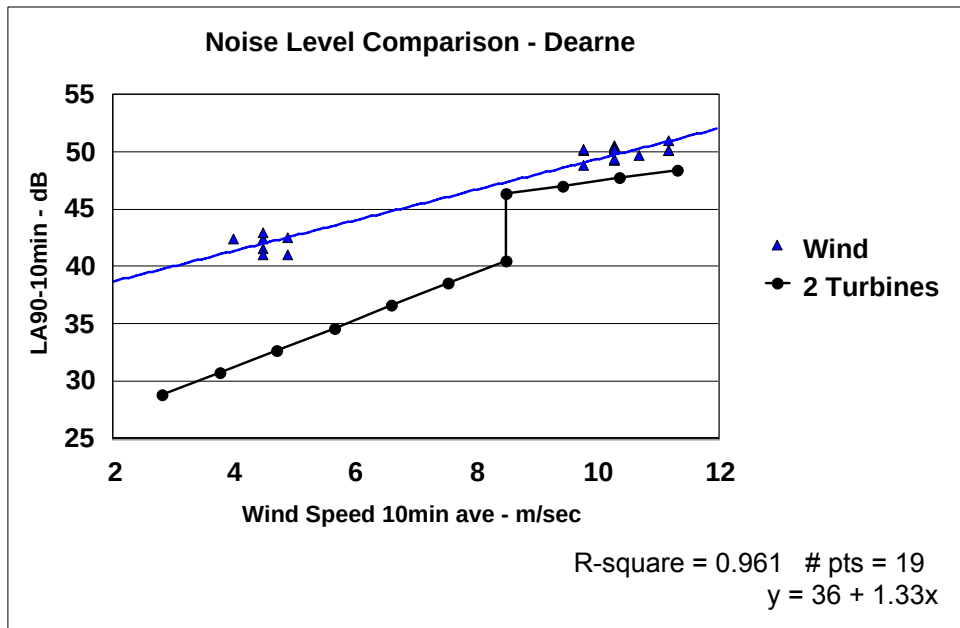

Figures 3 and 4 – One Turbine

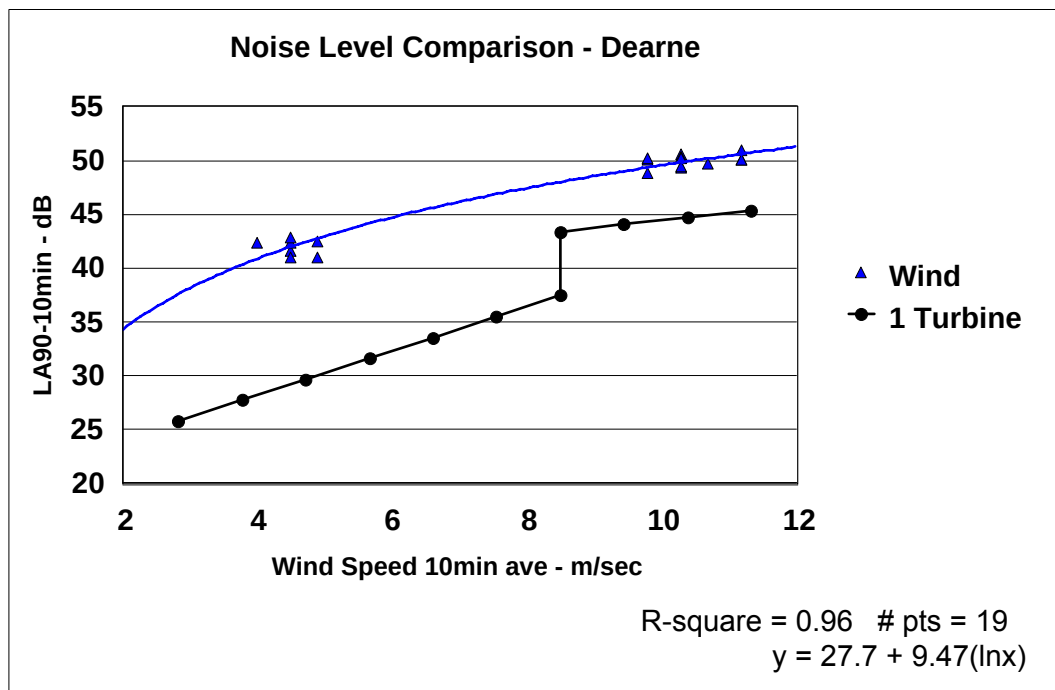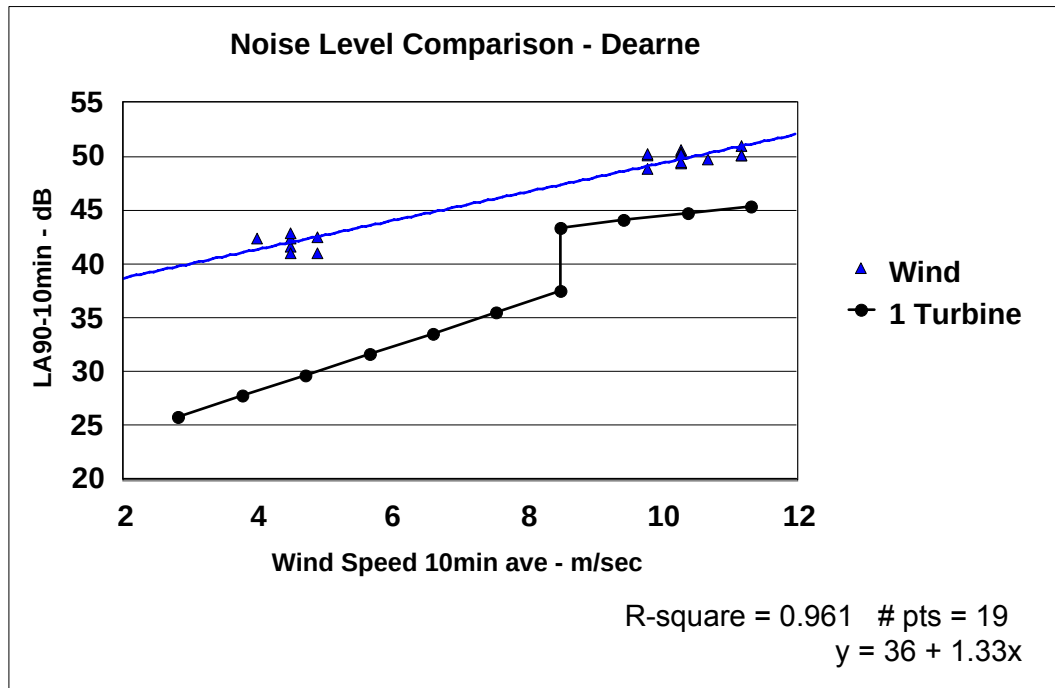



Appendix 5

Noise Measurement Parameter Definitions

L_{A90} - The "A" weighted sound pressure level that is exceeded for 90% of the measurement period. It is commonly used as the "Background Noise Level".

L_{Aeq} - The "A" weighted equivalent continuous sound pressure level. A representation of a continuous sound level containing the same amount of sound energy as the measured varying noise, over the measurement period. It can be considered as the "average" noise level.



Sound Research Laboratories Limited

Registered Address:

Holbrook House
Little Waldingfield
Sudbury
Suffolk
CO10 0TH

Registered Number: 907694 England

Tel: 01787 247595

Fax: 01787 248420

Website: www.soundresearch.co.uk

e.mail: srl@soundresearch.co.uk

SRL offers services in:

Acoustics
Laboratory and Site Testing
Fire
BREEAM
Air Tightness

SRL's Laboratory is accredited for testing under UKAS Number 0444

Member of the Association of Noise Consultants
Investors in People Accreditation
Robust Details Appointed Inspectors
Notified Body Under Noise Directive 2000/14/EC

London Office:

70 Cowcross Street
London
EC1M 6EJ
Tel: 0207 251 3585
Fax: 0207 336 8880

Altrincham Office:

Lynnfield House
Church Street
Altrincham, Cheshire WA14 4DZ
Tel: 0161 929 5585
Fax: 0161 929 5582

Wessex Office:

Hartham Park
Corsham
Wiltshire, SN13 0RP
Tel: 01249 700205

Dubai Office (representative):

Sound Research Laboratories Consulting FZC
P.O. Box 10559
Rakfz, RAK, UAE
Tel: 00971 4 3470047
Fax 00971 4 3470824



INVESTOR IN PEOPLE