


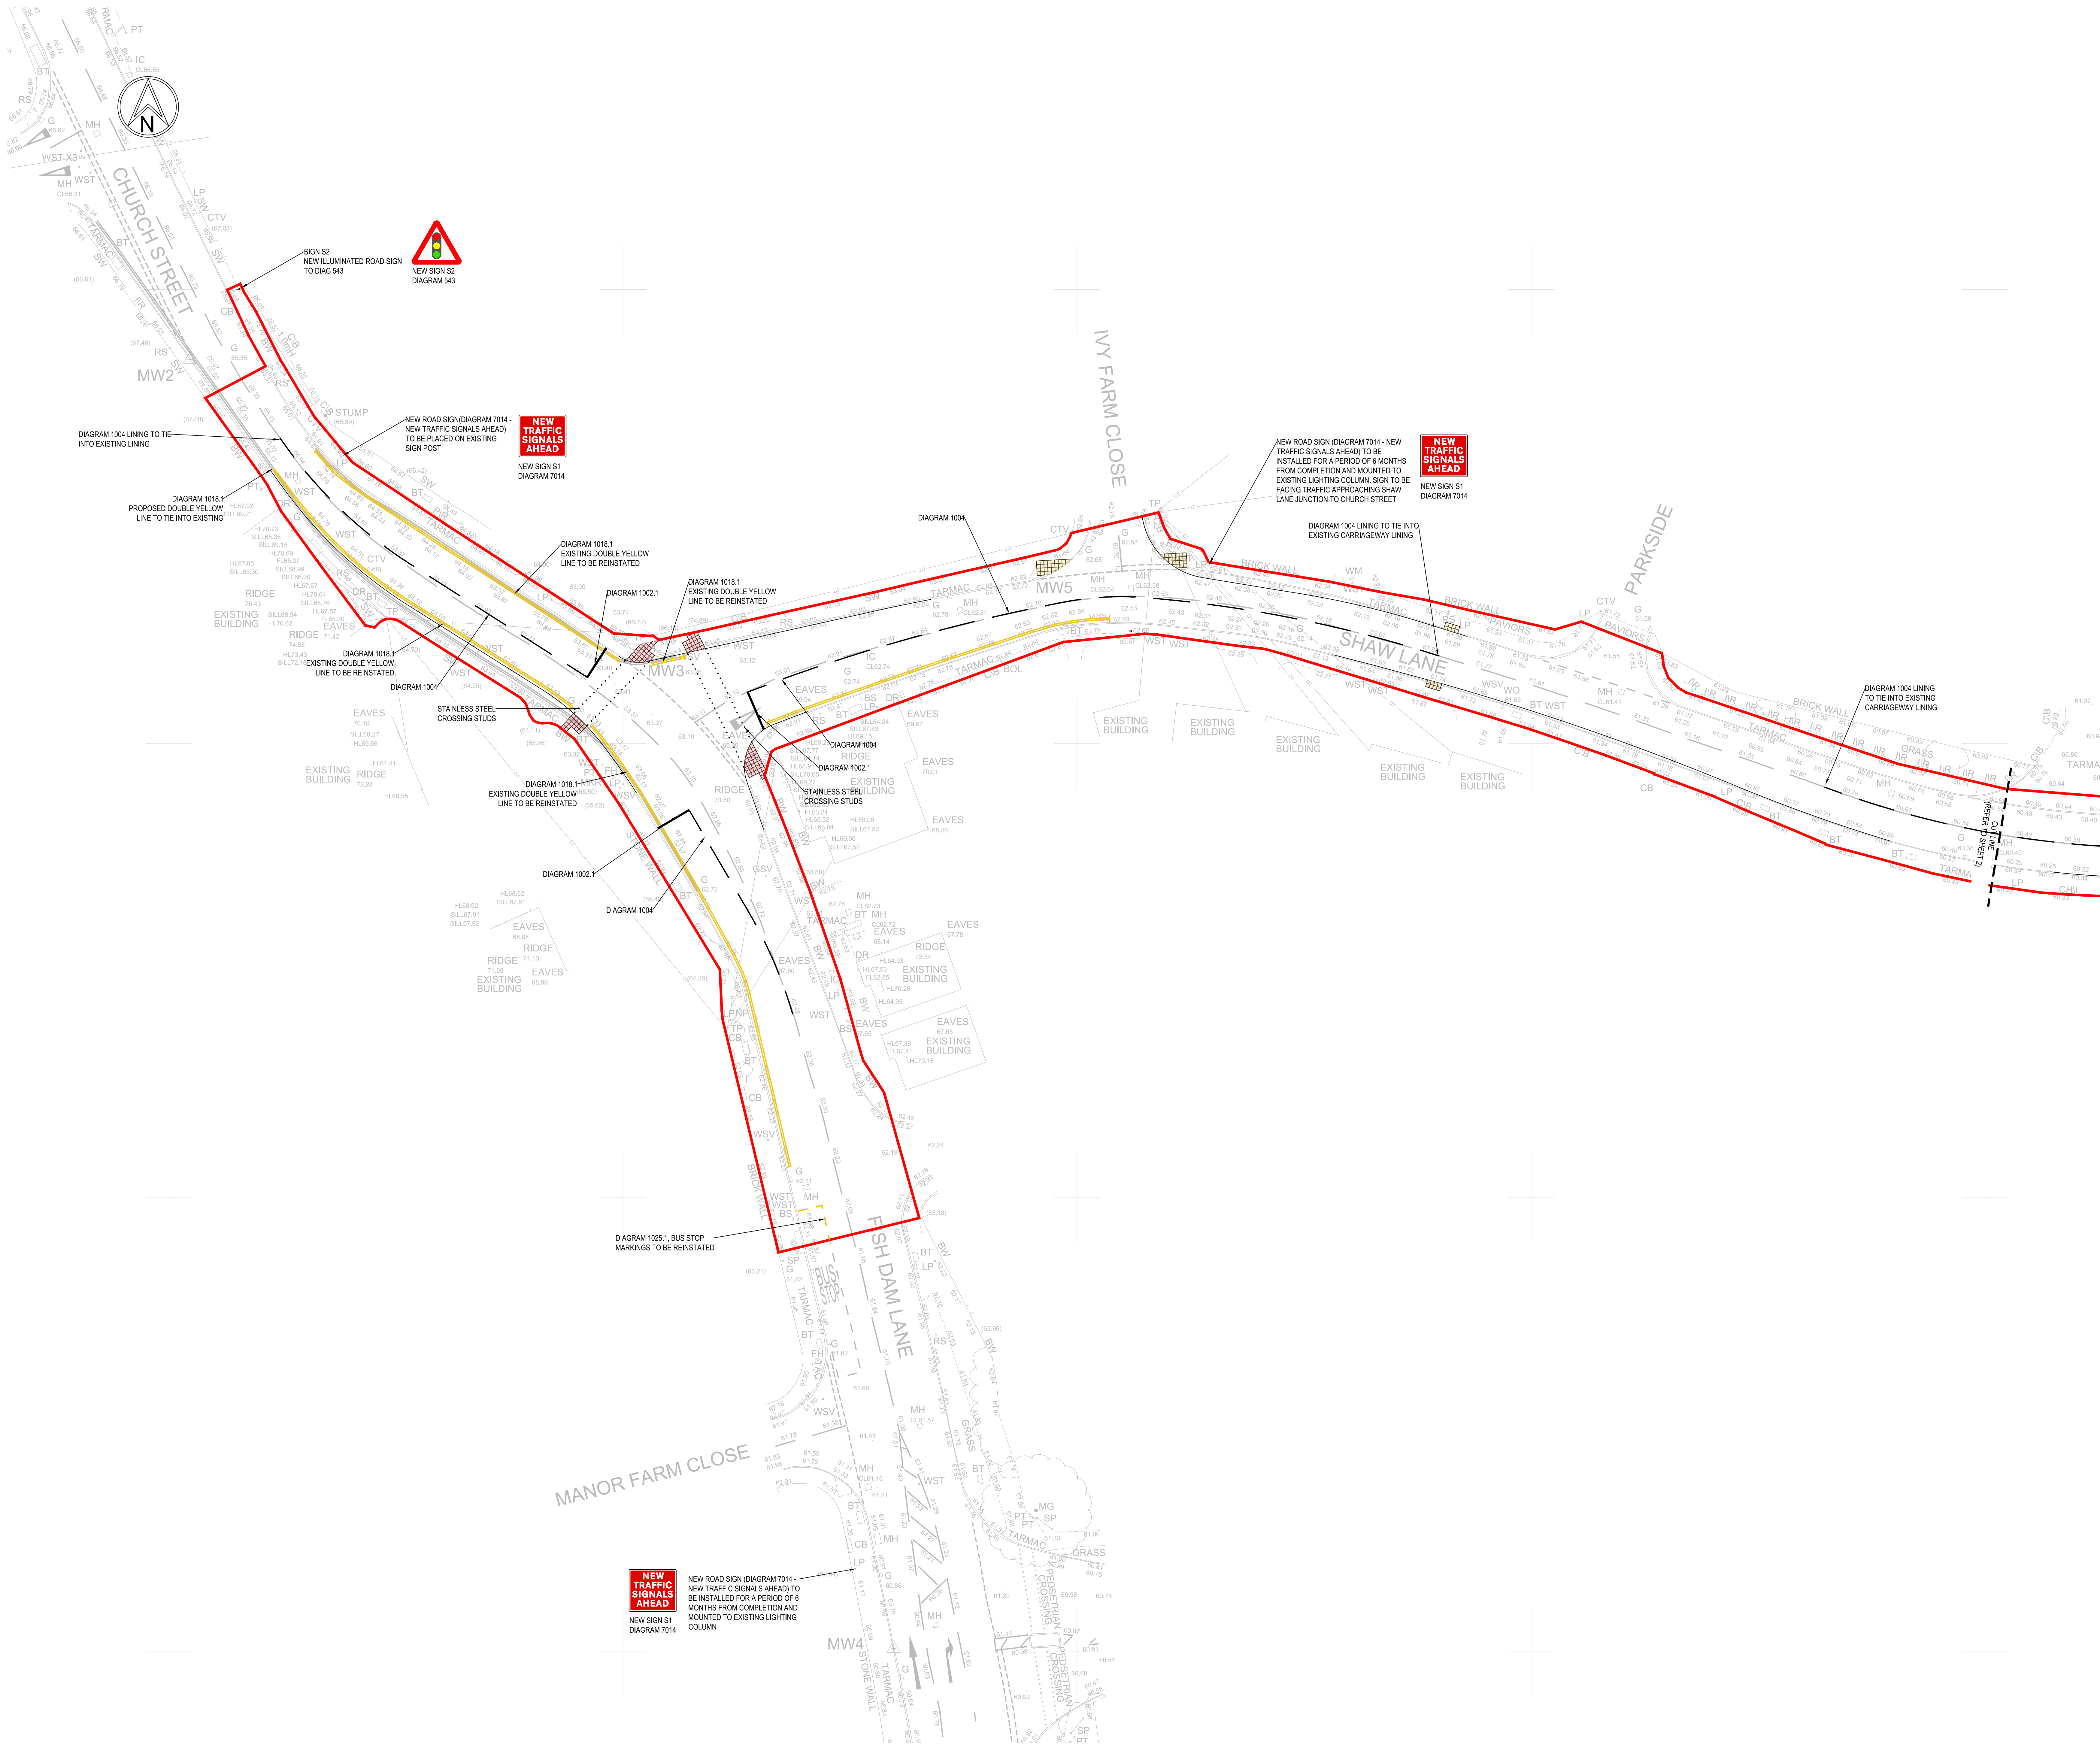

- GENERAL SAFETY NOTES**
- WHERE THE BASE ROAD BASE HAS BEEN USED AS A TEMPORARY RUNNING SURFACE DURING THE CONTRACT IT SHALL BE THOROUGHLY CLEANED AND POWER WASHED AS NECESSARY AFTER DRYING AND IMMEDIATELY BEFORE THE FINISH COURSE IS Laid A JACK COAT OF BITUMEN EMULSION CLASS A1-40 OR A1-40 TO BS2431 SHALL BE APPLIED AT A RATE OF 0.25-0.50 LITRES PER METER.
 - ALL RADIUS KERBS WITH A RADIUS OF 10m OR LESS SHALL BE FORMED WITH PROPRIETARY RADIUS KERBS.
- HEALTH & SAFETY**
- CONTRACTOR SHOULD BE AWARE OF GENERAL CONSTRUCTION RISKS TO PREVENT SLIPS, TRIPS AND FALLS AND TAKE NECESSARY PRECAUTIONS WITHOUT SPECIAL INSTRUCTION.
- SCAFFOLDING**
- CONTRACTOR TO PROVIDE TRENCH SUPPORTS AS APPROPRIATE AND ENSURE THAT PLANT REMAINS A SAFE DISTANCE FROM TRENCHES PRIOR TO INSTALLING DRAINAGE.
 - THE TIME THAT EXCAVATIONS ARE OPEN ON SITE SHOULD BE KEPT TO A MINIMUM AND ALL TRENCHES SHOULD BE SURROUNDED BY A BARRIER.
 - CONNECTIONS TO EXISTING SERVICES TO BE MADE BY APPROVED CONTRACTOR ONLY.
 - CONTRACTOR TO MAKE OPERATIVES AWARE OF ASSOCIATED DANGERS TO HEALTH SUCH AS LIFTING/POSSIBLE DASHES, DISEASES AND RECOMMENDED PRECAUTIONS, ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING TO BE PROVIDED AS REQUIRED.
 - UNIDENTIFIED MANHOLES MUST BE COVERED WITH LOAD BEARING MATERIALS AND SURROUNDED WITH BARRIERS.
- PAPER & CABLES**
- CONTRACTOR TO OBTAIN ALL SERVICE RECORDS PRIOR TO WORKS COMMENCING.
 - SERVICE RECORDS TO BE REFERRED TO PRIOR TO WORK COMMENCING. CONTRACTOR TO PROCEED WITH CAUTION AND SERVICES TO BE LOCATED BY HAND DIG AND PROTECTED ACCORDINGLY.
- EXCAVATIONS**
- CONTRACTOR TO ENSURE RELEVANT MEASURES ARE TAKEN TO KEEP PLANT AND PEOPLE A SAFE DISTANCE FROM EXCAVATIONS DURING THE WORKS.
 - CONTRACTOR TO ENSURE THAT PROCEDURES ARE IN PLACE TO KEEP PEOPLE A SAFE DISTANCE FROM WORKING PLANT WHERE NECESSARY.
 - CONTRACTOR TO REFER TO GROUND INVESTIGATION REPORT FOR CONTAMINATION TESTS AND TO PROVIDE ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING AS REQUIRED.

- DESIGN NOTES**
- PROPOSED LINES HAVE BEEN BASED ON THE EXISTING TOPOGRAPHICAL SURVEY BY SURVEY OPERATIONS DATED: DRAWING REF: 22047 DATED NOVEMBER 2022.
 - ALL WORKS TO COMPLY WITH CURRENT VERSION OF THE FOLLOWING DOCUMENTS:
 - DESIGN MANUAL FOR ROADS AND BRIDGES (DMRB)
 - SPECIFICATION FOR HIGHWAY WORKS (SPEL)
 - LOCAL AUTHORITY DESIGN RULES AND SPECIFICATION
 - PRIOR TO COMMENCING WORKS THE CONTRACTOR SHOULD INVESTIGATE AND LOCATE ANY NECESSARY ANY EXISTING UTILITY UNDERGROUND EQUIPMENT WITHIN THE WORK AREA AND RECORD REQUIREMENTS FOR COVER/PROTECTION AND PROTECTION WITH THE RELEVANT UNDERGROUND.
 - ALL WORKS WITHIN THE PUBLIC HIGHWAY TO MEET LOCAL AUTHORITY REQUIREMENTS. CONTRACTOR TO APPLY FOR ROAD OPENING PERMISSIONS ETC AS REQUIRED.
 - ROAD CONSTRUCTION DETAILS SUBJECT TO CORRECTION OF COR VALUES. CONTRACTOR TO ALLOW FOR LAB TESTS TO BE UNDERTAKEN IN AGREEMENT WITH LOCAL AUTHORITY HIGHWAY ENGINEER PRIOR TO WORKS COMMENCING.
 - WORKS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE RELEVANT STANDARDS, BRMCI SPECIFICATIONS AND GUIDANCE. ANY ISSUES IDENTIFIED DURING ARE TO BE ADDRESSED TO THE SATISFACTION OF BRMCI AS LIAISON THROUGH THE DEVELOPMENT MANAGEMENT TEAM.

SUBJECT TO LOCAL AUTHORITY APPROVAL

01/09/2026	SIGN S2 ADDED	AF	AE	2
11/09/2026	FIRST ISSUE	BR	AE	1
DATE	DESCRIPTION	CHK	CHK	REV

APPROVAL



CLIENT: VISTRY GROUP

PROJECT: SHAW LANE
CARLTON

TITLE: S278 TRAFFIC SIGNS & ROAD MARKINGS
OFFSITE WORKS - SHEET 2 OF 2

PROJECT NO:	24307	DISCIPLINE:	CIVIL	SCALE:	@ A0 1:250
DRAWING NO:	D527				

Project: Design, Technical, Production, Quality, Review, Issue, Approval, Author