

# Fire Shutters

## Application

Fire resistant roller shutters are used when effective fire resistance is required, coupled with an unobtrusive shutter.

They are designed for use between compliant walls and fire rated compartments, to restrict the passage of fire from one area to another.

All fire shutters are manufactured to ISO 9002 standards and can provide up to 4 hours fire resistance, certified by The Loss Prevention Certification Board.

# 4 hours fire resistance ...

## Options

- Fire resistant roller shutters can be manufactured to suit any size application, from small server windows to larger industrial openings (up to 7000 mm x 7000 mm).
- Shutters can be manual, self coiling activated (via a fusible link and dropper bar) or, for the larger industrial fire shutter, via electric motors linked to the fire circuit of the building, activating a controlled descent.
- Shutters can be polyester powder coated to suit most applications.



*Typical style & finish of shutter with External Box Head*



24 hour call out anywhere in the UK

0845 2705622



**Industrial Door Solutions Limited**

we operate a 24 hour call out service anywhere in the UK and guarantee to be on site within a minimum of 4 hours



we operate a 24 hour call out service anywhere in the UK and guarantee to be on site within a minimum of 4 hours

### Features + Benefits

- Offering up to 4 hours fire resistance.
- Available up to large sizes.
- Heavy duty construction.


# effective fire resistance ...

TYPICAL  
Box  
section  
Head

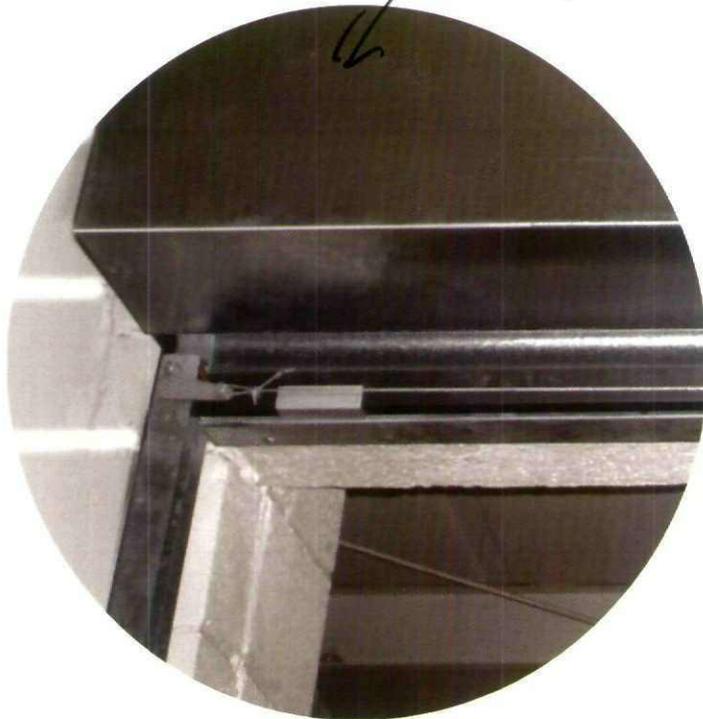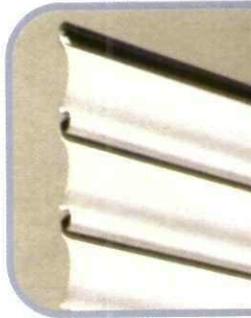

24 hour call out  
anywhere in the UK

0845 2705622



**Industrial Door  
Solutions Limited**