



## 12W LED TAPE WITH DRIVER & EXTRUSION

24V LED tape which is available in a choice of colour temperatures. The tape draws 12 watts to give up to 1440 lumens per metre.

It is available in standard 5m reels and can be cut to the nearest 100mm. Supplied with a driver and aluminium extrusion.



### SPECIFICATION

#### LED TAPE

- LED type: 2835 Epistar
- LEDs/metre: 60
- IP rating: IP33/IP65/IP67
- Cut-points: 100mm spacing
- Life: 70% @ 50,000 hrs
- Tape Width: 10mm
- Tape Height: 3mm
- Input voltage: 24 volts
- Input wattage: 12 watts
- Output lumens: 1260/metre (warm white) to 1440/metre (pure white)
- CRI rating: 85+

#### DRIVER

- Colour: White
- Materials: Plastic
- IP Rating: IP67
- L 163mm x W 43 mm x D 39mm
- Input voltage: 100V ~ 240V
- Output voltage: 12V or 24V
- Output current: 5.0A (12V) or 2.5A (24V)
- Output wattage: 60W

#### EXTRUSION

- Aluminium construction
- Diffused plastic cover
- 2 metre standard lengths
- W 25mm x H 28mm




Suitable for a variety of commercial, residential and retail applications.

#### LED TAPE - 12W



#### LED DRIVER - 60W

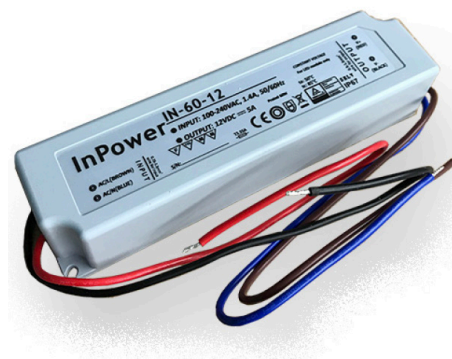

#### ALUMINIUM EXTRUSION



Surface-mounted aluminium profile with dimensions large enough to accommodate up to two LED strips side-by-side.

