

Connect on–street public transport display
Shelter / flag set out
Version 03

1. Open to kerb_Shelter and freestanding flag



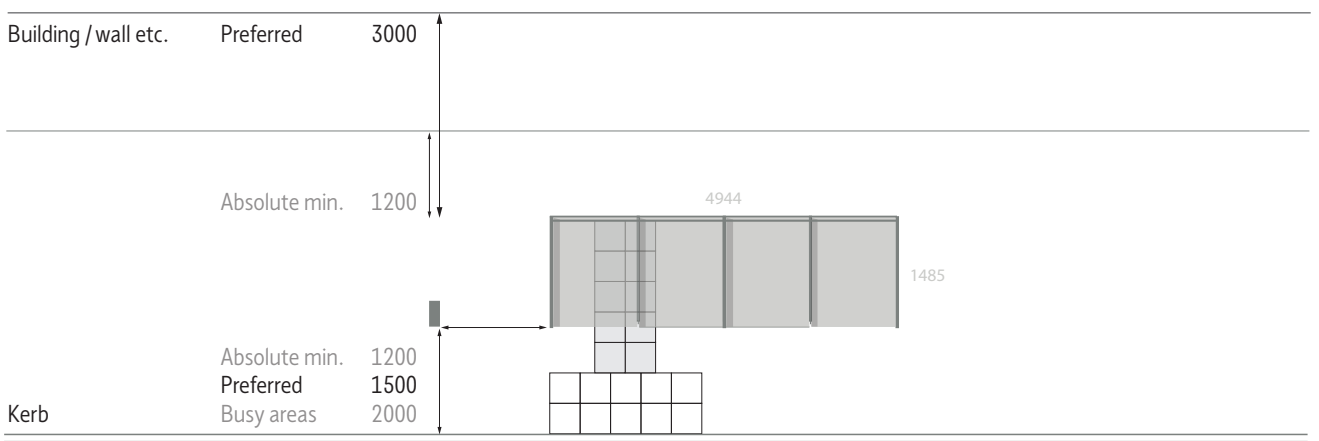


2. Closed to kerb_Shelter and freestanding flag

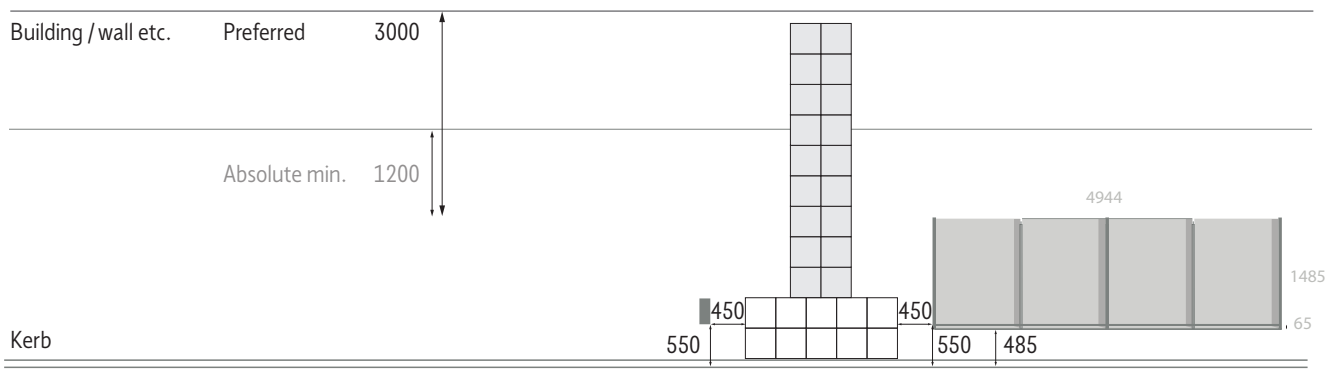



3. No shelter_Flag or existing carousel only

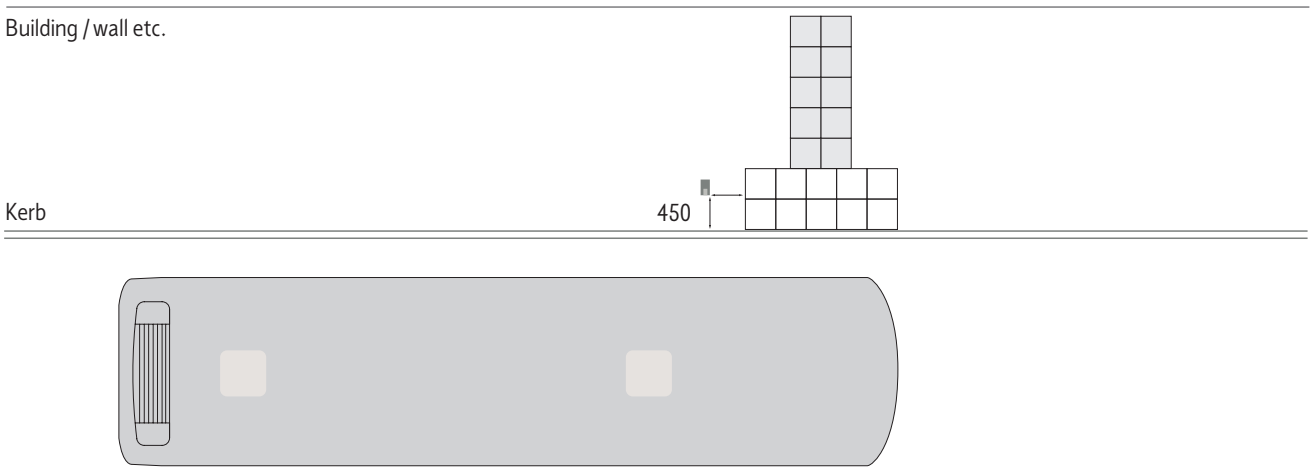

Please note:

_Closed to kerb shelter set out – space between the rear shelter panel glazing and the kerb edge has been increased from 450mm to 550mm to allow for 65mm roof glazing overhang.

_DFT Inclusive Mobility states that a clear width of 2000mm allows two wheelchairs to pass one another comfortably. Where it is not possible because of physical constraints 1500mm could be regarded as the minimum. The absolute minimum, where there is an obstacle, should be 1000mm. It is also recommended that there should be minimum widths of 3000mm at bus stops and 3500mm to 4500mm by shops, though it is recognised that this might not be possible. The maximum length of restricted width should be 6 metres.

_All dimensions/set out relate to DFT Inclusive Mobility and SYPTE guidelines.

_For illustrative purposes only, do not scale from this drawing, all measurements shown in mm.

City ID April 2005