


IMPORTANT TO TRANSFER ANY COVER LOADS THROUGH TO BACKFILL i.e. CONCRETE TO BE FREE OF ANY VOIDS UNDER G.R.P. TOP FLANGE.

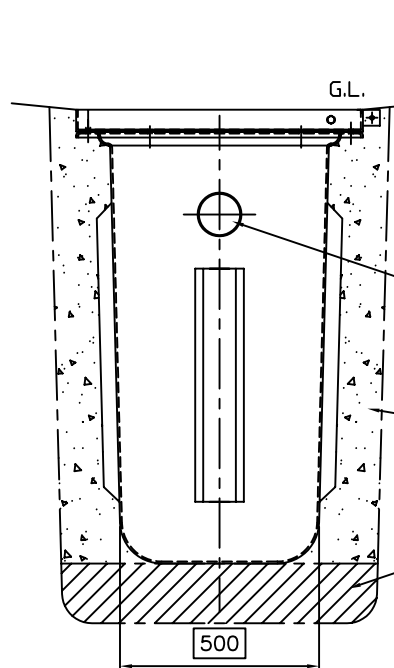

SURROUNDING FLOOR SLAB SHOULD HAVE AN ADEQUATE FALL TO ALLOW WASTE WATER TO RUN INTO SILT TRAP

110 (4") UPVC. OUTLET PIPE  
 CONCRETE BACKFILL BY CLIENT TO SUIT SITE CONDITIONS  
 CONCRETE BASE SLAB CAST BY CLIENT TO SUIT SITE CONDITIONS.

**NOTES: -**


- 1.) GALVANISED MESH COVERS. DESIGNED TO FACTA 'B' LOADING - 5 TONNE SMWL.
- 2.) VOLUMES. TOTAL VOLUME = 1150 Litres.
- 3.) TOTAL UNIT WEIGHT = 240kgs (EMPTY).

3	02.06.10	T.K.	CC856
2	30.10.09	P.T.C	CC774
1	10.12.08	JC	INITIAL ISSUE
ISSUE	DATE	DRAWN	MODIFICATION
<small>This drawing is copyright and may not be reproduced or used without the written permission of Kingspan.          KINGSKAN RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE</small>			

ALL DIMENSIONS ARE IN MILLIMETRES - DO NOT SCALE



<b>TITLE</b> CAR WASH SILT TRAP CST1H (c/w COVER) CUSTOMER DRAWING	
<b>SCALE</b> 1:10	<b>D.O. REF.</b> A2
<b>DRAWING No.</b> DS0714P	<b>ISSUE</b> 3



THIRD ANGLE PROJECTION