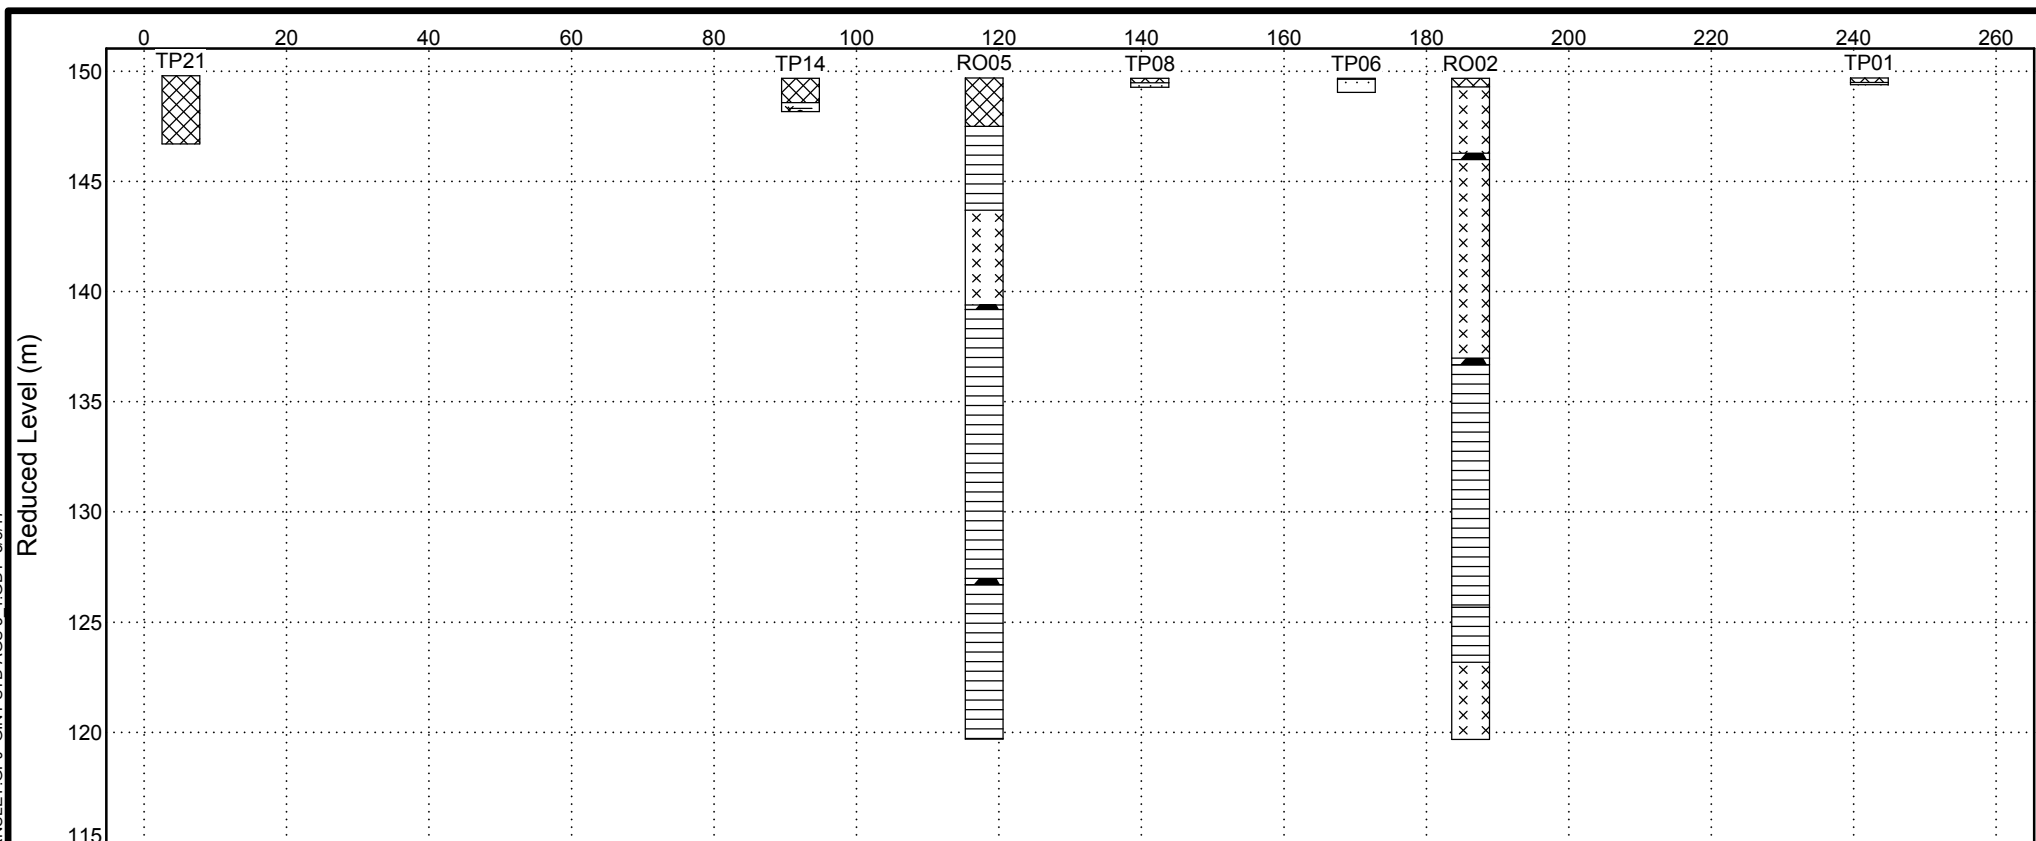

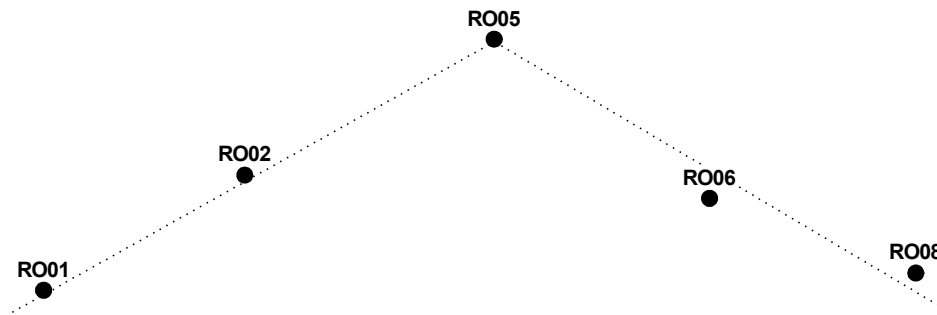
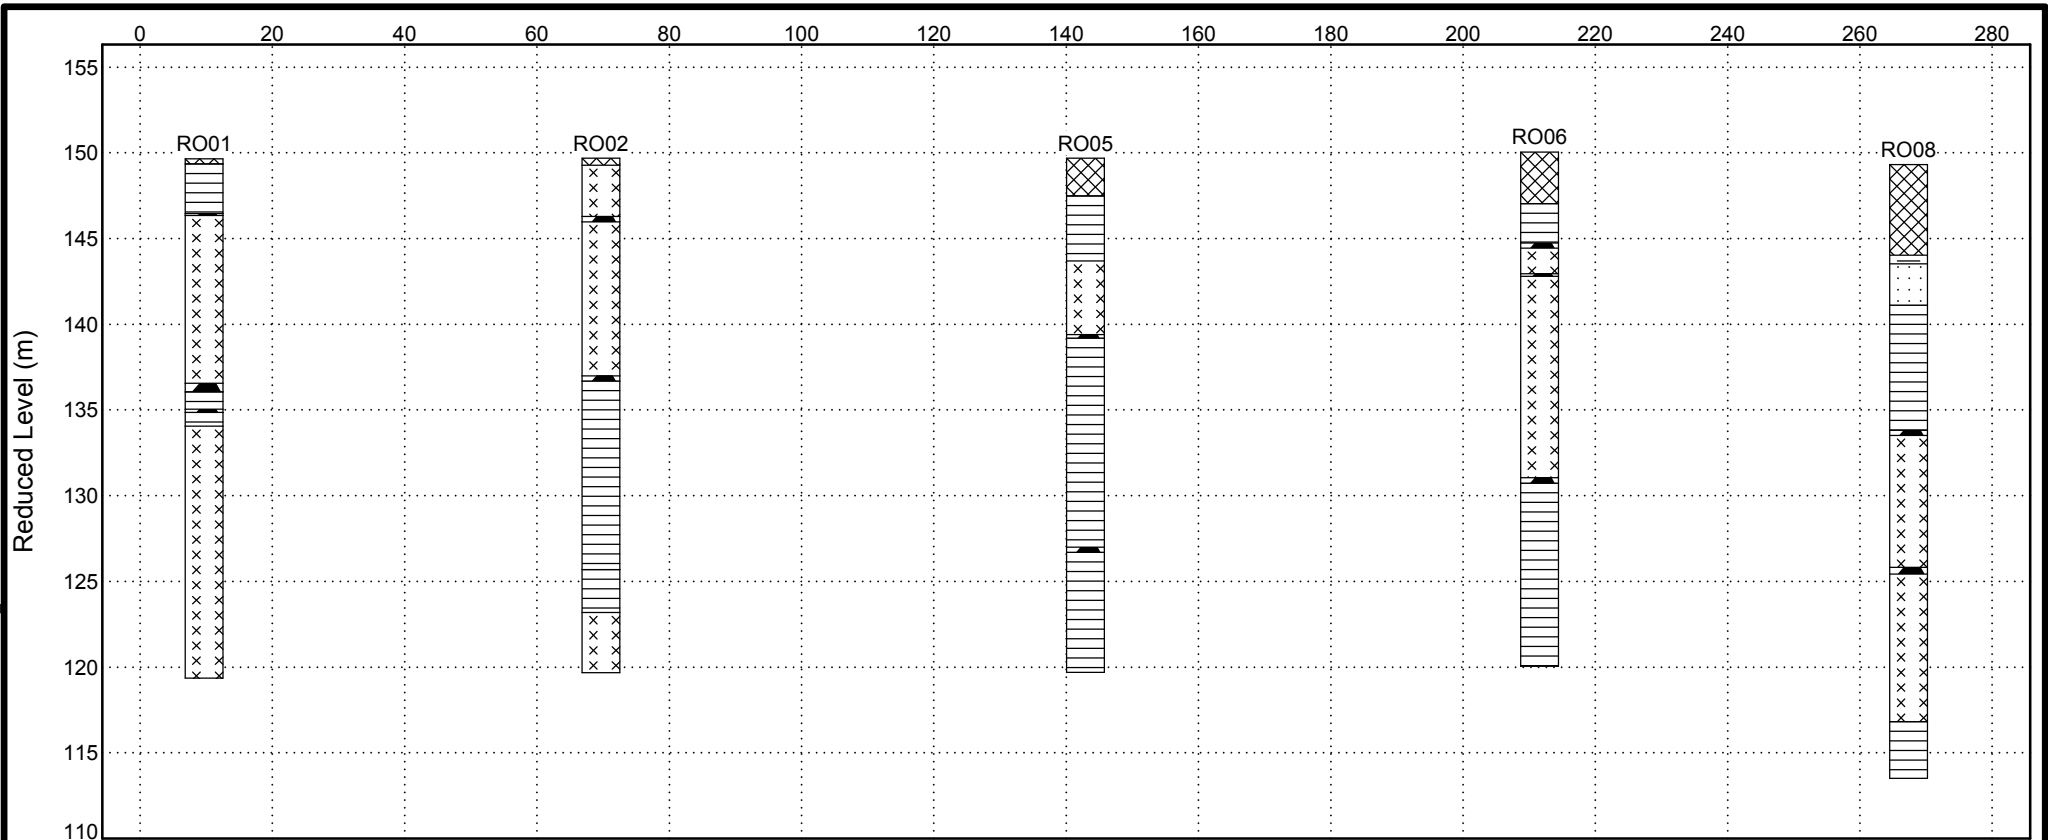





SUBSURFACE SECTION C - C'

Client: CDP Ltd.

Project: Capitol Park, Junction 37 - M1, Barnsley

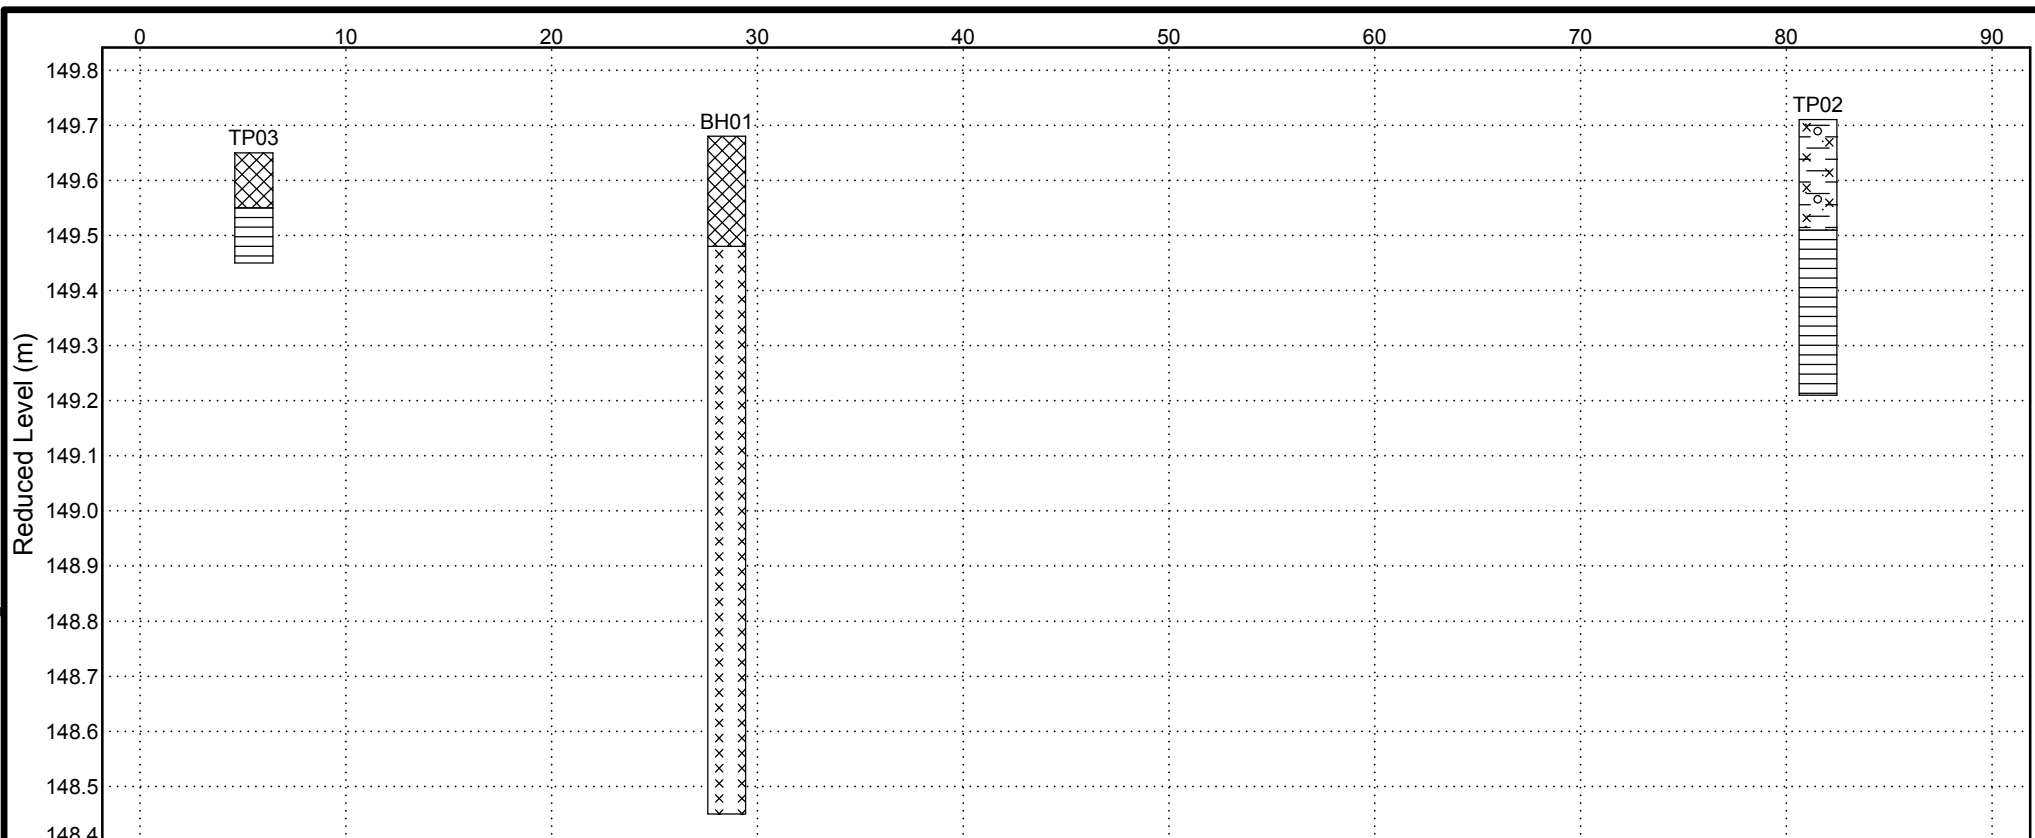
Number: 2450-5



TP03

BH01

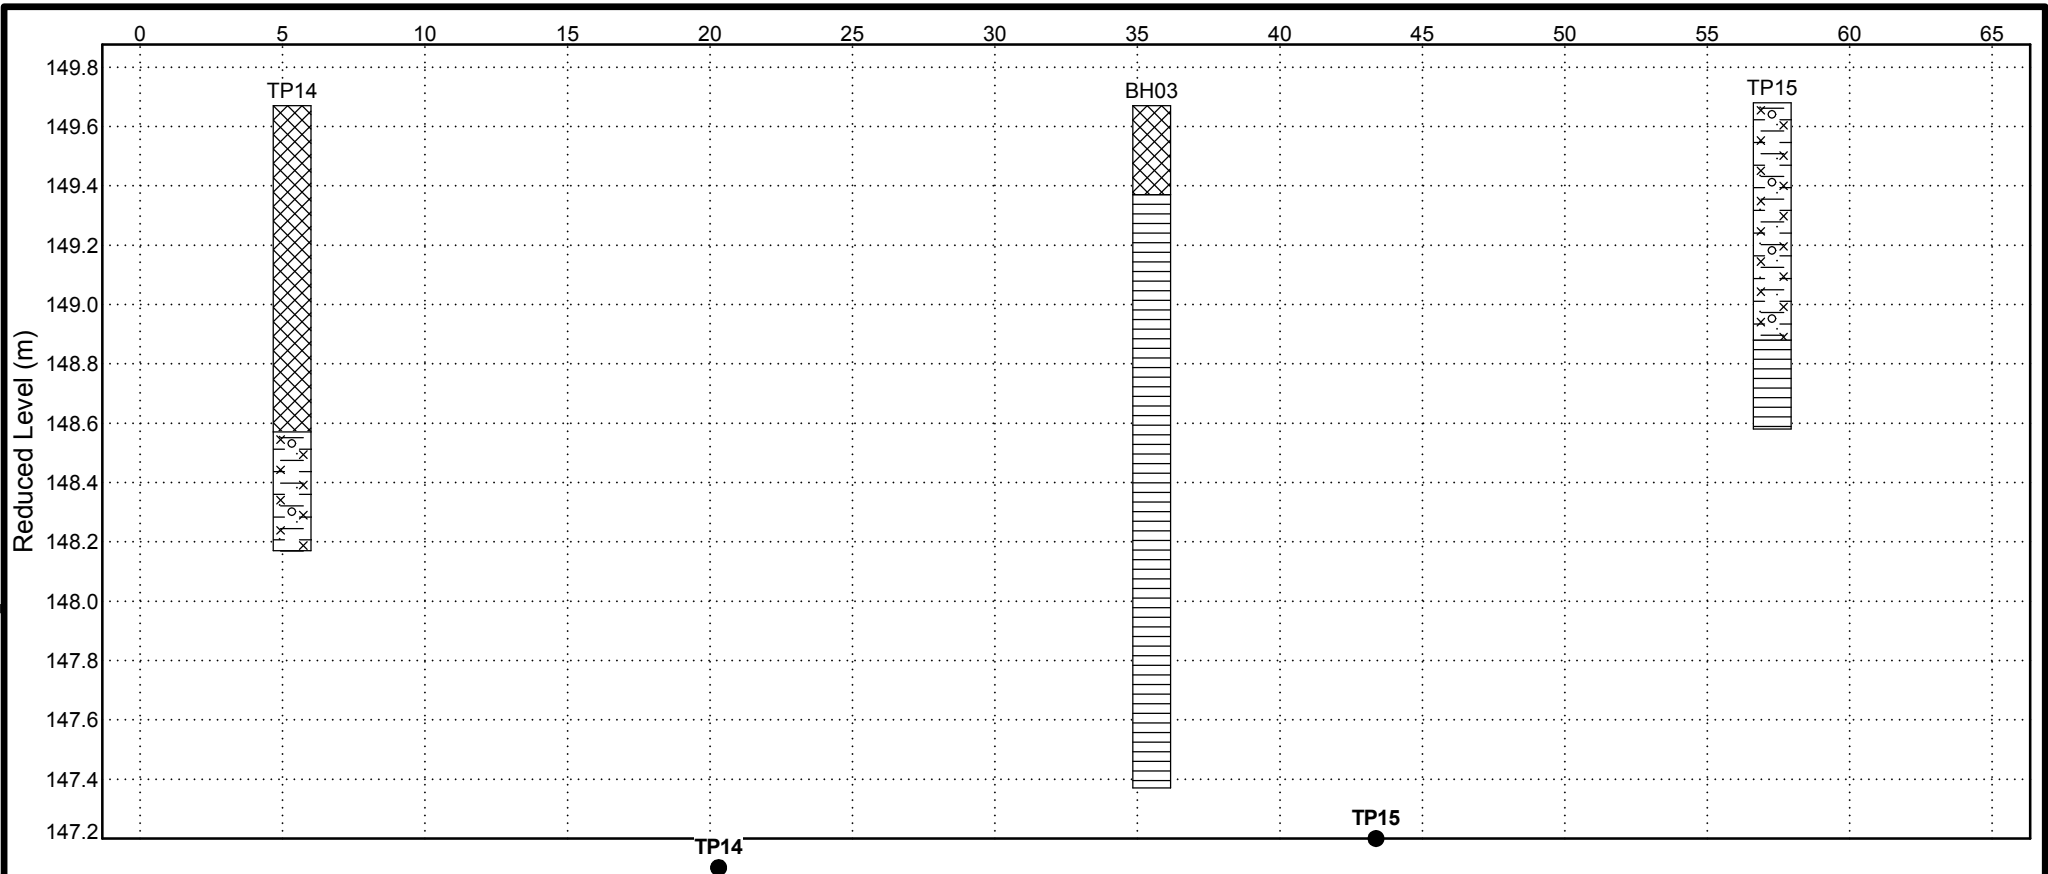TP02



DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO01	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.65	Co-Ordinates () E 431,646.0 N 406,108.0		
Contractor				Sheet 1 of 2	

RUN DETAILS					STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION		
						Main/Detail		
			149.35		0.30	MADE GROUND: Brown and grey slightly silty slightly sandy clay. Grey MUDSTONE.		
								
					(2.90)			
			146.45		3.20			
			146.35		3.30	COAL		
						Grey SILTSTONE.		
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								





Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
							0	30.3	Air	100	-Water struck at 26.5m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

[illegible]

GS3 UK DH - JPG 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNESLEY.GPJ GINT STD AGS 3 1.GDT 8/5/17

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO02	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.68	Co-Ordinates () E 431,670.0 N 406,053.0		
Contractor				Sheet 1 of 2	

RUN DETAILS						STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION			
						Main/Detail	Discontinuities		
			149.28		0.40	MADE GROUND: Brown and grey slightly silty slightly sandy clay.			
					(3.00)	Grey SILTSTONE.			
			146.28		3.40				
			145.98		3.70	COAL			
						Grey SILTSTONE.			
					(9.00)				
			136.98		12.70				
			136.68		13.00	COAL			
						Grey silty MUDSTONE.			
									(11.00)

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
							0	30	Air	100	-Water struck at 26m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG





Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO02	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.68	Co-Ordinates () E 431,670.0 N 406,053.0		
Contractor				Sheet 2 of 2	

RUN DETAILS						STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION			
						Main/Detail	Discontinuities		
			125.68		24.00	Grey silty MUDSTONE. (continued)			
			123.18		(2.50) 26.50	Dark grey MUDSTONE.			
			119.68		(3.50) 30.00	Grey SILTSTONE.			

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
					26						-Water struck at 26m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO05	
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.69	Co-Ordinates () E 431,698.0 N 405,985.0		
Contractor				Sheet 1 of 2	

RUN DETAILS					STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION		
						Main/Detail		
			147.49		(2.20) 2.20	MADE GROUND: Brown and grey slightly silty slightly sandy clay.		
			143.69		(3.80) 6.00	Brown/grey MUDSTONE.		
			139.39		(4.30) 10.30	Grey SILTSTONE.		
			139.19		10.50	COAL		
					(12.20)	Grey MUDSTONE.		

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
							0	30	Air	100	-Water struck at 26.5m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG




Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO05	
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.69	Co-Ordinates () E 431,698.0 N 405,985.0		
Contractor				Sheet 2 of 2	

RUN DETAILS						STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION			
						Main/Detail	Discontinuities		
						Grey MUDSTONE. (continued)			
			126.99		22.70				
			126.69		23.00	COAL			
						Grey MUDSTONE.			

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
					26.5						-Water struck at 26.5m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO06	
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 150.04	Co-Ordinates () E 431,651.0 N 405,934.0		
Contractor				Sheet 1 of 2	

RUN DETAILS					STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION		
						Main/Detail		
			147.04		(3.00) 3.00	MADE GROUND: Brown and grey slightly silty slightly sandy clay.		
			144.74 144.44	 	(2.30) 5.30 5.60	Brown/grey MUDSTONE. COAL		
			142.94 142.79	 	(1.50) 7.10 7.25	Grey SILTSTONE. COAL		
					(11.75)	Grey SILTSTONE.		
			131.04 130.74	 	19.00 19.30	COAL		
						Grey MUDSTONE.		

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
							0	30	Air	100	-No groundwater encountered. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No R006
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 150.04	Co-Ordinates () E 431,651.0 N 405,934.0	
Contractor				Sheet 2 of 2


[illegible]

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
											-No groundwater encountered. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125		Client CDP Ltd.				Method/ Plant Used Lorry Mounted Rig				Logged By JP	

AGS3 UK DH - JPG 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNESLEY.GPJ GINT STD AGS 3_1.GDT 8/5/17

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No RO08	
Job No 2450-5	Date 15-03-17 15-03-17	Ground Level (m) 149.32	Co-Ordinates () E 431,626.0 N 405,883.0		
Contractor				Sheet 1 of 2	

RUN DETAILS					STRATA		Geology	Instrument/ Backfill
Depth Date	TCR (SCR) RQD	(SPT) Fracture Spacing	Red'cd Level	Legend	Depth (Thick- ness)	DESCRIPTION		
						Main/Detail		
					(5.30)	MADE GROUND: Brown and grey slightly silty slightly sandy clay.		
			144.02		5.30			
			143.52		5.80	Brown CLAY.		
					(2.40)	Brown SANDSTONE.		
			141.12		8.20			
					(7.30)	Brown/grey MUDSTONE.		
			133.82		15.50			
			133.52		15.80	COAL		
					(7.70)	Grey SILTSTONE.		

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
							0	35.8	Air	100	-Water struck at 20.5m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125			Client CDP Ltd.			Method/ Plant Used Lorry Mounted Rig			Logged By JP		

DRILLHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				DRILLHOLE No R008
Job No 2450-5	Date 15-03-17 15-03-17	Ground Level (m) 149.32	Co-Ordinates () E 431,626.0 N 405,883.0	
Contractor				Sheet 2 of 2

[illegible]

Drilling Progress and Water Observations							Rotary Flush				GENERAL REMARKS
Date	Time	Depth	Casing	Core Dia mm	Strike	Water Standing	From	To	Type	Returns	
					20.5						-Water struck at 20.5m depth. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:125		Client CDP Ltd.				Method/ Plant Used Lorry Mounted Rig					Logged By JP

AGS3 UK DH - JPG 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNESLEY.GPJ GINT STD AGS 3_1.GDT 8/5/17

BOREHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				BOREHOLE No BH01	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.68	Co-Ordinates () E 431,700.0 N 406,086.0		
Contractor				Sheet 1 of 1	

SAMPLES & TESTS			STRATA				Geology	Instrument/ Backfill
Depth	Type No	Test Result	Water	Reduced Level	Legend	Depth (Thickness)		
0.00-1.00	B			149.48	XXXXXX	0.20		
1.00		N50/ 100 mm			XXXXXX	(1.03)		
				148.45	XXXXXX	1.23		
MADE GROUND: Firm to stiff brown and grey slightly silty slightly sandy gravelly clay. Gravel is angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments. Weak grey SILTSTONE. Arising as angular and tabular gravel and cobbles. (Pennine Middle Coal Measures Formation)								

Boring Progress and Water Observations						Chiselling			Water Added		GENERAL REMARKS
Date	Time	Depth	Depth	Casing Dia. mm	Water Dpt	From	To	Hours	From	To	
						0.2	1	0.5			-No groundwater encountered. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:62.5			Client CDP Ltd.			Method/ Plant Used Dando 2000			Logged By JP		

BOREHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				BOREHOLE No BH03
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.67	Co-Ordinates () E 431,648.0 N 405,986.0	
Contractor				Sheet 1 of 1

[illegible]

Boring Progress and Water Observations						Chiselling			Water Added		GENERAL REMARKS
Date	Time	Depth	Casing Depth	Dia. mm	Water Dpt	From	To	Hours	From	To	
						1.37	2	1.25			
All dimensions in metres Scale 1:62.5		Client CDP Ltd.				Method/ Plant Used Dando 2000					Logged By JP

AGS3 UK BH 2450-5 CAPITOL PARK,JUNCTION 37 - M1, BARNSELEY.GPJ GINT STD AGS3_1.GDT 17/5/17

BOREHOLE LOG

Project Capitol Park, Junction 37 - M1, Barnsley				BOREHOLE No BH05
Job No 2450-5	Date 15-03-17 15-03-17	Ground Level (m) 149.79	Co-Ordinates () E 431,627.0 N 405,861.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			STRATA				Geology	Instrument/ Backfill
Depth	Type No	Test Result	Water	Reduced Level	Legend	Depth (Thickness)		
0.00-1.00	B							
1.00		N11						
1.50-2.00	B							
2.00		N7						
2.50-3.00	B					(5.60)		
3.00		N14						
3.50-4.00	B							
4.00		N16						
4.50-5.00	B							
5.00		N6						
5.50-6.00	B			144.19		5.60		
6.00		N50/ 100 mm				(1.64)		
6.50-7.00	B							
7.00		N50/ 125 mm		142.55		7.24		

Boring Progress and Water Observations						Chiselling			Water Added		GENERAL REMARKS
Date	Time	Depth	Depth	Casing Dia. mm	Water Dpt	From	To	Hours	From	To	
						6.15	7	1.5			-No groundwater encountered. -No visual or olfactory evidence of contamination.
All dimensions in metres Scale 1:62.5			Client CDP Ltd.			Method/ Plant Used Dando 2000			Logged By JP		


AGS3 UK BH 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNESLEY GPJ GINT STD AGS 3, 1 GDT, 17/5/17

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP01
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.69	Co-Ordinates () E 431,673.0 N 406,109.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			Water	STRATA			Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa		Reduced Level	Legend	Depth (Thick- ness)		
0.00-0.20	ES			149.49		(0.20) 0.20	MADE GROUND: Firm to stiff brown and grey slightly silty slightly sandy gravelly clay. Gravel is angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments.	
				149.39		0.30	Grey SILTSTONE. Arising as angular and tabular gravel and cobbles. (Pennine Middle Coal Measures Formation)	

Shoring/Support: None
Stability: Trial pit sides remained stable

GENERAL
REMARKS


- No groundwater encountered.
- No visual or olfactory evidence of contamination.

All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP02
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.71	Co-Ordinates () E 431,647.0 N 406,084.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			Water	STRATA			Geology	Instrument/ Backfill	
Depth	Type No	Test Result kPa		Reduced Level	Legend	Depth (Thick-ness)			DESCRIPTION
0.00-0.20	ES			149.51		(0.20) 0.20	Firm to stiff brown and slightly grey mottled slightly silty slightly sandy slightly gravelly clay. Gravel is angular and tabular, of mudstone. (Weathered Pennine Middle Coal Measures Formation)		
0.20-0.50	D						(0.30) 0.50	Grey thinly laminated MUDSTONE. Arising as angular and tabular gravel and occasional cobbles with occasional iron staining on bedding surfaces. (Pennine Middle Coal Measures Formation)	

Shoring/Support: None
Stability: Trial pit sides remained stable

GENERAL
REMARKS


-No groundwater encountered. -No visual or olfactory evidence of contamination.
--

All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP03	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.65	Co-Ordinates () E 431,723.0 N 406,085.0		
Contractor				Sheet 1 of 1	

SAMPLES & TESTS			STRATA					Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thick- ness)	DESCRIPTION		
0.10-0.20	D				149.55		0.10	MADE GROUND: Firm to stiff brown and grey slightly silty slightly sandy gravelly clay. Gravel is angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments. Grey thinly laminated MUDSTONE. Arising as angular and tabular gravel and occasional cobbles with occasional iron staining on bedding surfaces. (Pennine Middle Coal Measures Formation)	
			149.45			0.20			


Shoring/Support: None Stability: Trial pit sides remained stable 			GENERAL REMARKS -No groundwater encountered. -No visual or olfactory evidence of contamination.	
All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ Plant Used JCB 3CX type machine with 600mm toothed bucket	Logged By JP	

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP05	
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.69	Co-Ordinates () E 431,647.0 N 406,035.0		
Contractor				Sheet 1 of 1	

SAMPLES & TESTS			Water	STRATA				Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa		Reduced Level	Legend	Depth (Thick-ness)	DESCRIPTION		
0.00-0.30	ES			149.39		(0.30) 0.30	MADE GROUND: Firm to stiff grey and brown slightly silty slightly sandy gravelly clay with rare boulders (up to 0.5m diameter). Gravel is angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments. Boulders are angular and tabular, of sandstone.		
				149.14		(0.25) 0.55	Stiff grey and occasionally yellowish brown mottled slightly silty slightly sandy slightly gravelly CLAY. Gravel is tabular, of brown mudstone. (Weathered Pennine Middle Coal Measures Formation)		
				149.09		0.60	Grey thinly laminated MUDSTONE. Arising as angular and tabular gravel and occasional cobbles with occasional iron staining on bedding surfaces. (Pennine Middle Coal Measures Formation)		

Shoring/Support: None
Stability: Trial pit sides remained stable



GENERAL REMARKS

-No groundwater encountered.
-No visual or olfactory evidence of contamination.

All dimensions in metres
Scale 1:25

Client CDP Ltd.


Method/ Plant Used JCB 3CX type machine with 600mm toothed bucket

Logged By
JP

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP06
Job No 2450-5	Date 13-03-17 13-03-17	Ground Level (m) 149.68	Co-Ordinates () E 431,675.0 N 406,037.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			Water	STRATA			Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa		Reduced Level	Legend	Depth (Thick- ness)		
0.00-0.05	ES			149.63				


Shoring/Support: None Stability: Trial pit sides slightly unstable 				GENERAL REMARKS	
All dimensions in metres Scale 1:25				-No groundwater encountered. -No visual or olfactory evidence of contamination.	
Client CDP Ltd.		Method/ Plant Used JCB 3CX type machine with 600mm toothed bucket		Logged By JP	

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP08
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.67	Co-Ordinates () E 431,675.0 N 406,008.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			Water	STRATA				Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa		Reduced Level	Legend	Depth (Thick- ness)	DESCRIPTION		
0.00-0.20	ES			149.47		(0.20) 0.20	MADE GROUND: Firm to stiff grey slightly silty slightly sandy very gravelly clay. Gravel is angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments.		
0.20-0.40	D			149.27		(0.20) 0.40	Yellowish brown thinly bedded fine grained SANDSTONE. Arising as angular and tabular gravel, cobbles and occasional boulders (up to 0.55m diameter). (Pennine Middle Coal Measures Formation)		

Shoring/Support: None
Stability: Trial pit sides slightly unstable

GENERAL
REMARKS

- No groundwater encountered.
- No visual or olfactory evidence of contamination.


All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP09
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.61	Co-Ordinates () E 431,622.0 N 406,007.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			STRATA				Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thick- ness)		
0.00-0.10	ES			149.51		0.10	Stiff grey and occasionally yellowish brown mottled slightly silty slightly sandy slightly gravelly CLAY. Gravel is tabular, of brown mudstone. (Weathered Pennine Middle Coal Measures Formation)	
				149.41		0.20	Grey thinly laminated MUDSTONE. Arising as angular and tabular gravel and occasional cobbles with occasional iron staining on bedding surfaces. (Pennine Middle Coal Measures Formation)	

Shoring/Support: None
Stability: Trial pit sides remained stable



GENERAL REMARKS

- No groundwater encountered.
- No visual or olfactory evidence of contamination.

All dimensions in metres
Scale 1:25



Client CDP Ltd.

Method/ JCB 3CX type machine with
Plant Used 600mm toothed bucket


Logged By JP

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP14
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.67	Co-Ordinates () E 431,677.0 N 405,959.0	
Contractor				Sheet 1 of 1

SAMPLES & TESTS			STRATA					Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thick- ness)	DESCRIPTION		
0.00-0.50	ES	102				(1.10)	MADE GROUND: Firm to stiff grey slightly silty slightly sandy gravelly clay with rare boulders (up to 0.5m diameter). Gravel and cobbles are angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments. Boulders are angular and tabular, of sandstone.		
1.10-1.50	D			148.57		(0.40)	Stiff yellowish brown and light grey mottled slightly silty slightly sandy slightly gravelly CLAY. Gravel is tabular, of brown mudstone. (Weathered Pennine Middle Coal Measures Formation) 1.10 - slight water seepage.		
1.50				148.17					

Shoring/Support: None
Stability: Trial pit sides remained stable


GENERAL
REMARKS


- Slight water seepage at 1.1m.
- No visual or olfactory evidence of contamination.

All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------

TRIAL PIT LOG


Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP15	
Job No 2450-5	Date 14-03-17 14-03-17	Ground Level (m) 149.68	Co-Ordinates () E 431,625.0 N 405,959.0		
Contractor				Sheet 1 of 1	


SAMPLES & TESTS			STRATA					Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thick- ness)	DESCRIPTION		
0.30-0.80	D			148.88		(0.80)	Firm to stiff light grey and yellowish brown mottled slightly silty slightly sandy slightly gravelly CLAY. Gravel is tabular, of brown mudstone. (Weathered Pennine Middle Coal Measures Formation)		
				148.58		(0.30)	Brown thinly laminated MUDSTONE. Arising as angular and tabular gravel and occasional cobbles with an occasional light grey clay smear on bedding surfaces. (Pennine Middle Coal Measures Formation)		

Shoring/Support: None Stability: Trial pit sides remained stable 			GENERAL REMARKS -No groundwater encountered. -No visual or olfactory evidence of contamination.	
All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ Plant Used JCB 3CX type machine with 600mm toothed bucket	Logged By JP	

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP18	
Job No 2450-5	Date 16-03-17 16-03-17	Ground Level (m) 151.97	Co-Ordinates () E 431,672.0 N 405,912.0		
Contractor				Sheet 1 of 1	

SAMPLES & TESTS			STRATA					Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thickness)	DESCRIPTION		
1.00-1.40	D			150.57		(1.40) 1.40	MADE GROUND: Firm to stiff grey slightly silty slightly sandy gravelly clay with rare boulders (up to 0.5m diameter). Gravel and cobbles are angular and tabular, of mudstone, dark grey shale, rare brick and coal fragments. Boulders are angular and tabular, of sandstone.		


Shoring/Support: None Stability: Trial pit sides remained stable 			GENERAL REMARKS -Trial pit undertaken in side of stockpile. -No groundwater encountered. -No visual or olfactory evidence of contamination.	
All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ Plant Used JCB 3CX type machine with 600mm toothed bucket	Logged By JP	

TP VOG V9 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNSELEY.GPJ GINT STD AGS 3.1.GDT 8/5/17

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP19	
Job No 2450-5	Date 16-03-17 16-03-17	Ground Level (m) 149.59	Co-Ordinates () E 431,627.0 N 405,909.0		
Contractor				Sheet 1 of 1	

SAMPLES & TESTS			STRATA					Geology	Instrument/ Backfill
Depth	Type No	Test Result kPa	Water	Reduced Level	Legend	Depth (Thick- ness)	DESCRIPTION		
2.50 2.50-2.60	D	83		147.09		2.50	MADE GROUND: Firm to stiff grey/brown slightly silty slightly sandy slightly gravelly clay with occasional cobbles and rare boulders (up to 0.3m diameter). Gravel and cobbles are angular and tabular, of sandstone and mudstone, and rare dark grey shale, brick and coal fragments. Boulders are angular and tabular, of sandstone.		
						(2.50)			
				146.79		2.80	2.40 - slight water seepage.		
							High strength (stiff) yellowish brown and light grey mottled slightly silty slightly sandy CLAY with rare gravel. Gravel is tabular, of brown mudstone. (Weathered Pennine Middle Coal Measures Formation)		

Shoring/Support: None Stability: Trial pit sides remained stable 			GENERAL REMARKS -Slight water seepage at 2.4m. -No visual or olfactory evidence of contamination.		
All dimensions in metres Scale 1:25		Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket		Logged By JP


TP VOG V9 2450-5 CAPITOL PARK, JUNCTION 37 - M1, BARNSELEY GPJ GINT STD AGS 3.1.GDT 8/5/17

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP20
Job No 2450-5	Date 16-03-17 16-03-17	Ground Level (m) 154.20	Co-Ordinates () E 431,648.0 N 405,883.0	
Contractor				Sheet 1 of 1

[illegible]

Shoring/Support: None
Stability: Trial pit sides slightly unstable

GENERAL
REMARKS

- Trial pit undertaken in side of stockpile.
- No groundwater encountered.
- No visual or olfactory evidence of contamination.


All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------

TRIAL PIT LOG

Project Capitol Park, Junction 37 - M1, Barnsley				TP No TP21
Job No 2450-5	Date 16-03-17 16-03-17	Ground Level (m) 149.79	Co-Ordinates () E 431,676.0 N 405,872.0	
Contractor				Sheet 1 of 1

[illegible]

Shoring/Support: None
Stability: Trial pit sides remained stable

GENERAL
REMARKS

- No groundwater encountered.
- No visual or olfactory evidence of contamination.

All dimensions in metres Scale 1:25	Client CDP Ltd.	Method/ JCB 3CX type machine with Plant Used 600mm toothed bucket	Logged By JP
--	-----------------	--	-----------------



Appendix C Chemical Analysis Certificates and HazWasteOnline Waste Classification



STATISTICAL ASSESSMENT OF CHEMICAL ANALYSIS

The results of the chemical analysis have been assessed in accordance with CL:AIRE (Contaminated Land: Applications in Real Environments) 'Guidance on Comparing Soil Contamination Data with a Critical Concentration' published by the CIEH, May 2008.

This guidance provides a statistical approach to objectively evaluate the evidence for and against particular propositions/hypothesis and has the useful attribute of enabling decision makers to reach conclusions about the available evidence, with at least some understanding of the validity of the results.

The guidance approaches this in the context of assessing the results from two different perspectives, the Planning Scenario and Part 2A.

When assessing in terms of the Planning Scenario, the key question would be 'can we confidently say that the level of contamination on this land is low relative to some appropriate measure of risk?' Under Part 2A, the question would be 'can we confidently say that the level of contamination is high relative to some appropriate measure of risk?'

These questions are addressed through the use of formal hypothesis – the "Null Hypothesis" and the "Alternative Hypothesis".

This assessment will be carried out in accordance with the Planning Scenario, where the aim is to demonstrate 'suitability for use'. The Null Hypothesis is that the level of contamination is the same as, or higher than the critical concentration/GAC. The Alternative Hypothesis is that the level of contamination is lower than the critical concentration/GAC. Under Part 2A the opposite set of propositions are applicable.

By convention, the Null Hypothesis is the starting proposition against which the key question, as expressed by the Alternative Hypothesis, can be tested.

The assessment of the results relies on there being a normal distribution of results for a particular contaminant and that the data set under consideration is representative of the particular material which is being assessed. If more than one dataset is present, then the hypothesis should be applied individually for each data set.

Under the Planning Scenario, the statistical test is used to demonstrate that there is a 95% probability that the true population mean falls below the critical concentration/GAC.

Appropriate data sets must be created to enable the statistical testing to be carried out and three key elements must be considered prior to statistical analysis. These are as follows:

- Dealing with non-detects;
- Understanding the statistical distribution of data; and
- Dealing with outliers.

The results can then be assessed and the results will be compared against the following:

- Sample Mean – if the sample mean of the data set is in excess of the GAC then the Upper Confidence Limit of the true population mean will be higher than the critical concentration.
- 95% of the Upper Confidence Limit.
- One Sample T Test (parametric test) carried out at the 95% confidence level.

On the basis of these tests, the validity of the Null Hypothesis can be assessed.



Certificate of Analysis

Certificate Number 17-94475

22-Mar-17

Client Jordan Pritchard Gorman
Civil & Structural Engineers
5 John Charles Way
Leeds
LS12 6QD

Our Reference 17-94475

Client Reference (not supplied)

Order No (not supplied)

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Description 9 Soil samples, 5 Leachate samples.

Date Received 16-Mar-17

Date Started 16-Mar-17

Date Completed 22-Mar-17

Test Procedures Identified by prefix DETSn (details on request).

Notes Opinions and interpretations are outside the scope of UKAS accreditation. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. Observations and interpretations are outside the scope of ISO 17025. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved By

Rob Brown
Business Manager



Summary of Chemical Analysis

Soil Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	1144064	1144065	1144066	1144067	1144068	1144069
Sample ID	TP01	TP02	TP05	TP06	TP07	TP09
Depth	0.00-0.20	0.00-0.20	0.00-0.30	0.00-0.50	1.60-1.80	0.00-0.10
Other ID						
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	13/03/17	13/03/17	13/03/17	13/03/17	13/03/17	14/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units						
Metals									
Arsenic	DETSC 2301#	0.2	mg/kg	7.7	5.5	4.1	16	24	9.8
Cadmium	DETSC 2301#	0.1	mg/kg	< 0.1	0.1	< 0.1	0.1	0.2	0.2
Chromium	DETSC 2301#	0.15	mg/kg	17	19	20	17	17	18
Chromium, Hexavalent	DETSC 2204*	1	mg/kg	< 1.0		< 1.0		< 1.0	
Copper	DETSC 2301#	0.2	mg/kg	30	30	31	32	46	28
Lead	DETSC 2301#	0.3	mg/kg	16	18	13	15	40	17
Mercury	DETSC 2325#	0.05	mg/kg	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nickel	DETSC 2301#	1	mg/kg	32	35	39	38	23	39
Selenium	DETSC 2301#	0.5	mg/kg	< 0.5	0.6	< 0.5	< 0.5	0.6	< 0.5
Zinc	DETSC 2301#	1	mg/kg	74	78	77	78	82	88
Inorganics									
pH	DETSC 2008#			7.7	6.4	6.4	6.5	7.3	6.8
Cyanide, Free	DETSC 2130#	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Organic matter	DETSC 2002#	0.1	%	3.4	1.3	2.3	1.4	4.2	1.5
Ammoniacal Nitrogen as N	DETSC 2119#	0.5	mg/kg	3.9		8.7		13	
Chloride Aqueous Extract	DETSC 2055	1	mg/l	8.8		5.1		8.4	
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	24	12	< 10	< 10	58	< 10
Sulphide	DETSC 2024#	10	mg/kg	< 10		< 10		< 10	
Sulphate as SO4, Total	DETSC 2321#	0.01	%	0.03		0.02		0.08	
Petroleum Hydrocarbons									
Aliphatic C5-C6	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C6-C8	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C8-C10	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C10-C12	DETSC 3072#	1.5	mg/kg					< 1.5	
Aliphatic C12-C16	DETSC 3072#	1.2	mg/kg					< 1.2	
Aliphatic C16-C21	DETSC 3072#	1.5	mg/kg					< 1.5	
Aliphatic C21-C35	DETSC 3072#	3.4	mg/kg					< 3.4	
Aliphatic C5-C35	DETSC 3072*	10	mg/kg					< 10	
Aromatic C5-C7	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C7-C8	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C8-C10	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C10-C12	DETSC 3072#	0.9	mg/kg					< 0.9	
Aromatic C12-C16	DETSC 3072#	0.5	mg/kg					< 0.5	
Aromatic C16-C21	DETSC 3072#	0.6	mg/kg					< 0.6	
Aromatic C21-C35	DETSC 3072#	1.4	mg/kg					< 1.4	
Aromatic C5-C35	DETSC 3072*	10	mg/kg					< 10	
TPH Ali/Aro Total	DETSC 3072*	10	mg/kg					< 10	
PAHs									
Naphthalene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1

Summary of Chemical Analysis

Soil Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	1144064	1144065	1144066	1144067	1144068	1144069
Sample ID	TP01	TP02	TP05	TP06	TP07	TP09
Depth	0.00-0.20	0.00-0.20	0.00-0.30	0.00-0.50	1.60-1.80	0.00-0.10
Other ID						
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	13/03/17	13/03/17	13/03/17	13/03/17	13/03/17	14/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units						
Fluorene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Phenanthrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	0.4	< 0.1	< 0.1	< 0.1	< 0.1
Pyrene	DETSC 3301	0.1	mg/kg	< 0.1	0.9	< 0.1	< 0.1	0.2	< 0.1
Benzo(a)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Chrysene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(b)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(k)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(a)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Indeno(1,2,3-c,d)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Dibenzo(a,h)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(g,h,i)perylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
PAH Total	DETSC 3301	1.6	mg/kg	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6
Phenols									
Phenol - Monohydric	DETSC 2130#	0.3	mg/kg	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3

Summary of Chemical Analysis

Soil Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	1144070	1144071	1144072
Sample ID	TP10	TP09	TP11
Depth	0.00-0.50	0.00-0.20	0.00-0.50
Other ID			
Sample Type	SOIL	SOIL	SOIL
Sampling Date	14/03/17	14/03/17	14/03/17
Sampling Time	n/s	n/s	n/s

Test	Method	LOD	Units			
Metals						
Arsenic	DETSC 2301#	0.2	mg/kg	9.8	14	12
Cadmium	DETSC 2301#	0.1	mg/kg	0.1	0.2	0.2
Chromium	DETSC 2301#	0.15	mg/kg	17	20	22
Chromium, Hexavalent	DETSC 2204*	1	mg/kg	< 1.0		< 1.0
Copper	DETSC 2301#	0.2	mg/kg	34	25	27
Lead	DETSC 2301#	0.3	mg/kg	17	29	33
Mercury	DETSC 2325#	0.05	mg/kg	< 0.05	< 0.05	< 0.05
Nickel	DETSC 2301#	1	mg/kg	31	15	18
Selenium	DETSC 2301#	0.5	mg/kg	< 0.5	0.8	0.7
Zinc	DETSC 2301#	1	mg/kg	66	87	99
Inorganics						
pH	DETSC 2008#			6.8	7.1	7.1
Cyanide, Free	DETSC 2130#	0.1	mg/kg	< 0.1	0.1	0.1
Organic matter	DETSC 2002#	0.1	%	3.0	2.5	3.5
Ammoniacal Nitrogen as N	DETSC 2119#	0.5	mg/kg	7.6		28
Chloride Aqueous Extract	DETSC 2055	1	mg/l	3.4		8.6
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	36	40	50
Sulphide	DETSC 2024#	10	mg/kg	< 10		56
Sulphate as SO4, Total	DETSC 2321#	0.01	%	0.04		0.06
Petroleum Hydrocarbons						
Aliphatic C5-C6	DETSC 3321*	0.01	mg/kg			
Aliphatic C6-C8	DETSC 3321*	0.01	mg/kg			
Aliphatic C8-C10	DETSC 3321*	0.01	mg/kg			
Aliphatic C10-C12	DETSC 3072#	1.5	mg/kg			
Aliphatic C12-C16	DETSC 3072#	1.2	mg/kg			
Aliphatic C16-C21	DETSC 3072#	1.5	mg/kg			
Aliphatic C21-C35	DETSC 3072#	3.4	mg/kg			
Aliphatic C5-C35	DETSC 3072*	10	mg/kg			
Aromatic C5-C7	DETSC 3321*	0.01	mg/kg			
Aromatic C7-C8	DETSC 3321*	0.01	mg/kg			
Aromatic C8-C10	DETSC 3321*	0.01	mg/kg			
Aromatic C10-C12	DETSC 3072#	0.9	mg/kg			
Aromatic C12-C16	DETSC 3072#	0.5	mg/kg			
Aromatic C16-C21	DETSC 3072#	0.6	mg/kg			
Aromatic C21-C35	DETSC 3072#	1.4	mg/kg			
Aromatic C5-C35	DETSC 3072*	10	mg/kg			
TPH Ali/Aro Total	DETSC 3072*	10	mg/kg			
PAHs						
Naphthalene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1
Acenaphthylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1
Acenaphthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.1

Summary of Chemical Analysis

Soil Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	1144070	1144071	1144072
Sample ID	TP10	TP09	TP11
Depth	0.00-0.50	0.00-0.20	0.00-0.50
Other ID			
Sample Type	SOIL	SOIL	SOIL
Sampling Date	14/03/17	14/03/17	14/03/17
Sampling Time	n/s	n/s	n/s

Test	Method	LOD	Units			
Fluorene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1
Phenanthrene	DETSC 3301	0.1	mg/kg	< 0.1	0.2	0.6
Anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.2
Fluoranthene	DETSC 3301	0.1	mg/kg	0.1	0.4	1.0
Pyrene	DETSC 3301	0.1	mg/kg	0.1	0.4	1.0
Benzo(a)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.7
Chrysene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.4
Benzo(b)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.3
Benzo(k)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.2
Benzo(a)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.6
Indeno(1,2,3-c,d)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.4
Dibenzo(a,h)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1
Benzo(g,h,i)perylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	0.1
PAH Total	DETSC 3301	1.6	mg/kg	< 1.6	< 1.6	5.5
Phenols						
Phenol - Monohydric	DETSC 2130#	0.3	mg/kg	< 0.3	< 0.3	< 0.3

Summary of Chemical Analysis

Leachate Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	1144073	1144074	1144075	1144076	1144077
Sample ID	TP01	TP05	TP07	TP10	TP11
Depth	0.00-0.20	0.00-0.30	1.60-1.80	0.00-0.50	0.00-0.50
Other ID					
Sample Type	LEACHATE	LEACHATE	LEACHATE	LEACHATE	LEACHATE
Sampling Date	13/03/17	13/03/17	13/03/17	14/03/17	14/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units					
Preparation								
NRA Leachate Preparation	DETS 036*			Y	Y	Y	Y	Y
Metals								
Arsenic, Dissolved	DETSC 2306	0.16	ug/l	0.29	< 0.16	< 0.16	< 0.16	1.8
Cadmium, Dissolved	DETSC 2306	0.03	ug/l	< 0.03	< 0.03	< 0.03	< 0.03	< 0.03
Chromium, Dissolved	DETSC 2306	0.25	ug/l	< 0.25	< 0.25	< 0.25	< 0.25	0.33
Copper, Dissolved	DETSC 2306	0.4	ug/l	0.7	0.4	< 0.4	< 0.4	2.1
Lead, Dissolved	DETSC 2306	0.09	ug/l	0.14	< 0.09	0.11	< 0.09	0.44
Mercury, Dissolved	DETSC 2306	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Nickel, Dissolved	DETSC 2306	0.5	ug/l	2.6	< 0.5	< 0.5	< 0.5	< 0.5
Selenium, Dissolved	DETSC 2306	0.25	ug/l	< 0.25	< 0.25	< 0.25	< 0.25	< 0.25
Zinc, Dissolved	DETSC 2306	1.3	ug/l	190	< 1.3	< 1.3	9.1	5.0
Inorganics								
pH	DETSC 2008			7.2	6.5	6.4	6.7	6.8
Cyanide, Free	DETSC 2130	20	ug/l	< 20	< 20	< 20	< 20	< 20
Sulphate as SO4	DETSC 2055	0.1	mg/l	2.5	0.70	1.6	24	2.5
PAHs								
Naphthalene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.01	0.04
Acenaphthylene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.06	0.07
Fluorene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.05	0.07
Phenanthrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.07	0.17
Anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.02	0.05
Fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.07	0.10
Pyrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.05	0.07
Benzo(a)anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	0.01	0.09
Chrysene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	0.51
Benzo(b)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	0.03
Benzo(k)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	0.04
Benzo(a)pyrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	0.04
Indeno(1,2,3-c,d)pyrene	DETSC 3304*	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenzo(a,h)anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(g,h,i)perylene	DETSC 3304*	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
PAH Total	DETSC 3304	0.04	ug/l	< 0.04	< 0.04	< 0.04	0.34	1.3
Phenols								
Phenol	*	0.5	ug/l	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50

Summary of Asbestos Analysis Soil Samples

Our Ref 17-94475

Client Ref

Contract Title Capitol Park, Junction 37 (M1), Dodworth

Lab No	Sample ID	Material Type	Result	Comment*	Analyst
1144064	TP01 0.00-0.20	SOIL	NAD	none	Steven Lambert
1144065	TP02 0.00-0.20	SOIL	NAD	none	Steven Lambert
1144066	TP05 0.00-0.30	SOIL	NAD	none	Steven Lambert
1144067	TP06 0.00-0.50	SOIL	NAD	none	Steven Lambert
1144068	TP07 1.60-1.80	SOIL	NAD	none	Steven Lambert
1144069	TP09 0.00-0.10	SOIL	NAD	none	Steven Lambert
1144070	TP10 0.00-0.50	SOIL	NAD	none	Steven Lambert
1144071	TP09 0.00-0.20	SOIL	NAD	none	Steven Lambert
1144072	TP11 0.00-0.50	SOIL	NAD	none	Steven Lambert

Crocidolite = Blue Asbestos, Amosite = Brown Asbestos, Chrysotile = White Asbestos. Anthophyllite, Actinolite and Tremolite are other forms of Asbestos. Samples are analysed by DETSC 1101 using polarised light microscopy in accordance with HSG248 and documented in-house methods. NAD = No Asbestos Detected. Where a sample is NAD, the result is based on analysis of at least 2 sub-samples and should be taken to mean 'no asbestos detected in sample'. Key: * - not included in laboratory scope of accreditation.

Information in Support of the Analytical Results

Our Ref 17-94475

Client Ref

Contract Capitol Park, Junction 37 (M1), Dodworth

Containers Received & Deviating Samples

Lab No	Sample ID	Date Sampled	Containers Received	Holding time exceeded for tests	Inappropriate container for tests
1144064	TP01 0.00-0.20 SOIL	13/03/17	GJ 250ml, PT 1L		
1144065	TP02 0.00-0.20 SOIL	13/03/17	GJ 250ml, PT 1L		
1144066	TP05 0.00-0.30 SOIL	13/03/17	GJ 250ml, PT 1L		
1144067	TP06 0.00-0.50 SOIL	13/03/17	GJ 250ml, PT 1L		
1144068	TP07 1.60-1.80 SOIL	13/03/17	GJ 250ml, GJ 60ml, PT 1L		
1144069	TP09 0.00-0.10 SOIL	14/03/17	GJ 250ml, PT 1L		
1144070	TP10 0.00-0.50 SOIL	14/03/17	GJ 250ml, PT 1L		
1144071	TP09 0.00-0.20 SOIL	14/03/17	GJ 250ml, PT 1L		
1144072	TP11 0.00-0.50 SOIL	14/03/17	GJ 250ml, PT 1L		
1144073	TP01 0.00-0.20 LEACHATE	13/03/17	GJ 250ml, PT 1L		
1144074	TP05 0.00-0.30 LEACHATE	13/03/17	GJ 250ml, PT 1L		
1144075	TP07 1.60-1.80 LEACHATE	13/03/17	GJ 250ml, GJ 60ml, PT 1L		
1144076	TP10 0.00-0.50 LEACHATE	14/03/17	GJ 250ml, PT 1L		
1144077	TP11 0.00-0.50 LEACHATE	14/03/17	GJ 250ml, PT 1L		

Key: G-Glass P-Plastic J-Jar T-Tub

DETS cannot be held responsible for the integrity of samples received whereby the laboratory did not undertake the sampling. In this instance samples received may be deviating. Deviating Sample criteria are based on British and International standards and laboratory trials in conjunction with the UKAS note 'Guidance on Deviating Samples'. All samples received are listed above. However, those samples that have additional comments in relation to hold time, inappropriate containers etc are deviating due to the reasons stated. This means that the analysis is accredited where applicable, but results may be compromised due to sample deviations. If no sampled date (soils) or date+time (waters) has been supplied then samples are deviating. However, if you are able to supply a sampled date (and time for waters) this will prevent samples being reported as deviating where specific hold times are not exceeded and where the container supplied is suitable.

Soil Analysis Notes

Inorganic soil analysis was carried out on a dried sample, crushed to pass a 425µm sieve, in accordance with BS1377.

Organic soil analysis was carried out on an 'as received' sample. Organics results are corrected for moisture and expressed on a dry weight basis.

The Loss on Drying, used to express organics analysis on an air dried basis, is carried out at a temperature of 28°C +/-2°C.

Disposal

From the issue date of this test certificate, samples will be held for the following times prior to disposal :-

Soils - 1 month, Liquids - 2 weeks, Asbestos (test portion) - 6 months



Certificate of Analysis

Certificate Number 17-94765

27-Mar-17

Client Jordan Pritchard Gorman
Civil & Structural Engineers
5 John Charles Way
Leeds
LS12 6QD

Our Reference 17-94765

Client Reference (not supplied)

Order No (not supplied)

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Description 8 Soil samples, 8 Leachate samples.

Date Received 18-Mar-17

Date Started 18-Mar-17

Date Completed 27-Mar-17

Test Procedures Identified by prefix DETSn (details on request).

Notes Opinions and interpretations are outside the scope of UKAS accreditation. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. Observations and interpretations are outside the scope of ISO 17025. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved By

Rob Brown
Business Manager



Summary of Chemical Analysis

Soil Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1145887	1145888	1145889	1145890	1145891	1145892
Sample ID	TP14	TP16	TP17	TP18	TP20	TP21
Depth	0.00-0.50	0.50-1.00	0.00-0.50	1.00-1.40	1.00-1.50	0.00-0.50
Other ID						
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	14/03/17	14/03/17	14/03/17	16/03/17	16/03/17	16/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units						
Metals									
Arsenic	DETSC 2301#	0.2	mg/kg	11	13	8.0	5.9	9.1	5.2
Cadmium	DETSC 2301#	0.1	mg/kg	0.2	0.1	< 0.1	0.1	0.1	0.1
Chromium	DETSC 2301#	0.15	mg/kg	19	20	19	19	18	24
Chromium, Hexavalent	DETSC 2204*	1	mg/kg	< 1.0		< 1.0			< 1.0
Copper	DETSC 2301#	0.2	mg/kg	35	53	36	34	33	35
Lead	DETSC 2301#	0.3	mg/kg	25	22	17	17	22	16
Mercury	DETSC 2325#	0.05	mg/kg	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nickel	DETSC 2301#	1	mg/kg	26	20	31	47	30	31
Selenium	DETSC 2301#	0.5	mg/kg	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Zinc	DETSC 2301#	1	mg/kg	76	43	81	89	72	77
Inorganics									
pH	DETSC 2008#			7.6	5.1	6.0	6.8	8.2	7.9
Cyanide, Free	DETSC 2130#	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Organic matter	DETSC 2002#	0.1	%	2.9	18	1.9	0.7	1.1	1.6
Ammoniacal Nitrogen as N	DETSC 2119#	0.5	mg/kg	14		6.3			7.5
Chloride	DETSC 2055	1	mg/kg	11.7		6.5			1.8
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	97	40	69	15	15	19
Sulphide	DETSC 2024#	10	mg/kg	16		16			16
Petroleum Hydrocarbons									
Aliphatic C5-C6	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C6-C8	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C8-C10	DETSC 3321*	0.01	mg/kg					< 0.01	
Aliphatic C10-C12	DETSC 3072#	1.5	mg/kg					< 1.5	
Aliphatic C12-C16	DETSC 3072#	1.2	mg/kg					< 1.2	
Aliphatic C16-C21	DETSC 3072#	1.5	mg/kg					< 1.5	
Aliphatic C21-C35	DETSC 3072#	3.4	mg/kg					< 3.4	
Aliphatic C5-C35	DETSC 3072*	10	mg/kg					< 10	
Aromatic C5-C7	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C7-C8	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C8-C10	DETSC 3321*	0.01	mg/kg					< 0.01	
Aromatic C10-C12	DETSC 3072#	0.9	mg/kg					< 0.9	
Aromatic C12-C16	DETSC 3072#	0.5	mg/kg					< 0.5	
Aromatic C16-C21	DETSC 3072#	0.6	mg/kg					< 0.6	
Aromatic C21-C35	DETSC 3072#	1.4	mg/kg					< 1.4	
Aromatic C5-C35	DETSC 3072*	10	mg/kg					< 10	
TPH Ali/Aro Total	DETSC 3072*	10	mg/kg					< 10	
PAHs									
Naphthalene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1

Summary of Chemical Analysis Soil Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1145887	1145888	1145889	1145890	1145891	1145892
Sample ID	TP14	TP16	TP17	TP18	TP20	TP21
Depth	0.00-0.50	0.50-1.00	0.00-0.50	1.00-1.40	1.00-1.50	0.00-0.50
Other ID						
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	14/03/17	14/03/17	14/03/17	16/03/17	16/03/17	16/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units						
Fluorene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	0.3	< 0.1
Phenanthrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	0.1	0.2
Pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	0.1	0.2
Benzo(a)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Chrysene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(b)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(k)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(a)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Indeno(1,2,3-c,d)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Dibenzo(a,h)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(g,h,i)perylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
PAH Total	DETSC 3301	1.6	mg/kg	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6
Phenols									
Phenol - Monohydric	DETSC 2130#	0.3	mg/kg	0.4	0.8	0.4	0.4	0.4	< 0.3

Summary of Chemical Analysis

Soil Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1145893	1145894
Sample ID	TP12 (SPB)	TP12A(SP B)
Depth	0.00-0.50	0.50-1.00
Other ID		
Sample Type	SOIL	SOIL
Sampling Date	16/03/17	16/03/17
Sampling Time	n/s	n/s

Test	Method	LOD	Units		
Metals					
Arsenic	DETSC 2301#	0.2	mg/kg	7.1	7.4
Cadmium	DETSC 2301#	0.1	mg/kg	0.1	0.2
Chromium	DETSC 2301#	0.15	mg/kg	18	18
Chromium, Hexavalent	DETSC 2204*	1	mg/kg		< 1.0
Copper	DETSC 2301#	0.2	mg/kg	29	24
Lead	DETSC 2301#	0.3	mg/kg	21	21
Mercury	DETSC 2325#	0.05	mg/kg	< 0.05	< 0.05
Nickel	DETSC 2301#	1	mg/kg	29	24
Selenium	DETSC 2301#	0.5	mg/kg	< 0.5	< 0.5
Zinc	DETSC 2301#	1	mg/kg	74	74
Inorganics					
pH	DETSC 2008#			7.4	8.4
Cyanide, Free	DETSC 2130#	0.1	mg/kg	< 0.1	< 0.1
Organic matter	DETSC 2002#	0.1	%	2.0	1.6
Ammoniacal Nitrogen as N	DETSC 2119#	0.5	mg/kg		6.2
Chloride	DETSC 2055	1	mg/kg		8.2
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	31	72
Sulphide	DETSC 2024#	10	mg/kg		12
Petroleum Hydrocarbons					
Aliphatic C5-C6	DETSC 3321*	0.01	mg/kg		< 0.01
Aliphatic C6-C8	DETSC 3321*	0.01	mg/kg		< 0.01
Aliphatic C8-C10	DETSC 3321*	0.01	mg/kg		< 0.01
Aliphatic C10-C12	DETSC 3072#	1.5	mg/kg		< 1.5
Aliphatic C12-C16	DETSC 3072#	1.2	mg/kg		< 1.2
Aliphatic C16-C21	DETSC 3072#	1.5	mg/kg		< 1.5
Aliphatic C21-C35	DETSC 3072#	3.4	mg/kg		< 3.4
Aliphatic C5-C35	DETSC 3072*	10	mg/kg		< 10
Aromatic C5-C7	DETSC 3321*	0.01	mg/kg		< 0.01
Aromatic C7-C8	DETSC 3321*	0.01	mg/kg		< 0.01
Aromatic C8-C10	DETSC 3321*	0.01	mg/kg		< 0.01
Aromatic C10-C12	DETSC 3072#	0.9	mg/kg		< 0.9
Aromatic C12-C16	DETSC 3072#	0.5	mg/kg		< 0.5
Aromatic C16-C21	DETSC 3072#	0.6	mg/kg		1.2
Aromatic C21-C35	DETSC 3072#	1.4	mg/kg		< 1.4
Aromatic C5-C35	DETSC 3072*	10	mg/kg		< 10
TPH Ali/Aro Total	DETSC 3072*	10	mg/kg		< 10
PAHs					
Naphthalene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1
Acenaphthylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1
Acenaphthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1

Summary of Chemical Analysis Soil Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1145893	1145894
Sample ID	TP12 (SPB)	TP12A(SP B)
Depth	0.00-0.50	0.50-1.00
Other ID		
Sample Type	SOIL	SOIL
Sampling Date	16/03/17	16/03/17
Sampling Time	n/s	n/s

Test	Method	LOD	Units		
Fluorene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1
Phenanthrene	DETSC 3301	0.1	mg/kg	< 0.1	0.5
Anthracene	DETSC 3301	0.1	mg/kg	< 0.1	0.3
Fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	2.2
Pyrene	DETSC 3301	0.1	mg/kg	< 0.1	1.8
Benzo(a)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	1.3
Chrysene	DETSC 3301	0.1	mg/kg	< 0.1	1.0
Benzo(b)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	0.6
Benzo(k)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	0.5
Benzo(a)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	1.4
Indeno(1,2,3-c,d)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	0.6
Dibenzo(a,h)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1
Benzo(g,h,i)perylene	DETSC 3301	0.1	mg/kg	< 0.1	0.5
PAH Total	DETSC 3301	1.6	mg/kg	< 1.6	11
Phenols					
Phenol - Monohydric	DETSC 2130#	0.3	mg/kg	0.4	< 0.3

Summary of Chemical Analysis

Leachate Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1146233	1146234	1146235	1146236	1146237
Sample ID	TP14	TP16	TP17	TP18	TP20
Depth	0.00-0.50	0.50-1.00	0.00-0.50	1.00-1.40	1.00-1.50
Other ID					
Sample Type	LEACHATE	LEACHATE	LEACHATE	LEACHATE	LEACHATE
Sampling Date	14/03/17	14/03/17	14/03/17	16/03/17	16/03/17
Sampling Time	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units					
Preparation								
NRA Leachate Preparation	DETS 036*			Y	Y	Y	Y	Y
Metals								
Arsenic, Dissolved	DETSC 2306	0.16	ug/l	1.5	0.31	0.73	0.38	0.94
Cadmium, Dissolved	DETSC 2306	0.03	ug/l	< 0.03	< 0.03	< 0.03	< 0.03	< 0.03
Chromium, Dissolved	DETSC 2306	0.25	ug/l	0.54	< 0.25	< 0.25	< 0.25	0.32
Copper, Dissolved	DETSC 2306	0.4	ug/l	2.6	0.5	0.8	0.7	1.4
Lead, Dissolved	DETSC 2306	0.09	ug/l	0.96	0.15	0.38	0.30	0.47
Mercury, Dissolved	DETSC 2306	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Nickel, Dissolved	DETSC 2306	0.5	ug/l	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Selenium, Dissolved	DETSC 2306	0.25	ug/l	0.40	< 0.25	1.4	0.81	0.81
Zinc, Dissolved	DETSC 2306	1.3	ug/l	1.4	< 1.3	< 1.3	< 1.3	< 1.3
Inorganics								
pH	DETSC 2008			7.1	6.1	6.5	6.5	7.6
Cyanide, Free	DETSC 2130	20	ug/l	< 20	< 20	< 20	< 20	< 20
Sulphate as SO4	DETSC 2055	0.1	mg/l	3.0	4.1	7.1	1.8	1.4
PAHs								
Naphthalene	DETSC 3304	0.01	ug/l	0.03	< 0.01	< 0.01	< 0.01	0.02
Acenaphthylene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	DETSC 3304	0.01	ug/l	0.06	< 0.01	< 0.01	< 0.01	0.03
Fluorene	DETSC 3304	0.01	ug/l	0.06	< 0.01	< 0.01	< 0.01	0.03
Phenanthrene	DETSC 3304	0.01	ug/l	0.24	< 0.01	< 0.01	< 0.01	0.14
Anthracene	DETSC 3304	0.01	ug/l	0.04	< 0.01	< 0.01	< 0.01	0.02
Fluoranthene	DETSC 3304	0.01	ug/l	0.14	< 0.01	< 0.01	< 0.01	0.08
Pyrene	DETSC 3304	0.01	ug/l	0.09	< 0.01	< 0.01	< 0.01	0.07
Benzo(a)anthracene	DETSC 3304	0.01	ug/l	0.03	< 0.01	< 0.01	< 0.01	0.03
Chrysene	DETSC 3304	0.01	ug/l	0.04	< 0.01	< 0.01	< 0.01	0.05
Benzo(b)fluoranthene	DETSC 3304	0.01	ug/l	0.05	< 0.01	< 0.01	< 0.01	0.08
Benzo(k)fluoranthene	DETSC 3304	0.01	ug/l	0.02	< 0.01	< 0.01	< 0.01	0.03
Benzo(a)pyrene	DETSC 3304	0.01	ug/l	0.03	< 0.01	< 0.01	< 0.01	0.06
Indeno(1,2,3-c,d)pyrene	DETSC 3304*	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	0.05
Dibenzo(a,h)anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(g,h,i)perylene	DETSC 3304*	0.01	ug/l	0.04	< 0.01	< 0.01	< 0.01	0.06
PAH Total	DETSC 3304	0.04	ug/l	0.88	< 0.04	< 0.04	< 0.04	0.75
Phenols								
Phenol	*	0.5	ug/l	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50

Summary of Chemical Analysis

Leachate Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	1146238	1146239	1146240
Sample ID	TP21	TP12 (SPB)	TP12A(SPB)
Depth	0.00-0.50	0.00-0.50	0.50-1.00
Other ID			
Sample Type	LEACHATE	LEACHATE	LEACHATE
Sampling Date	16/03/17	16/03/17	16/03/17
Sampling Time	n/s	n/s	n/s

Test	Method	LOD	Units			
Preparation						
NRA Leachate Preparation	DETS 036*			Y	Y	Y
Metals						
Arsenic, Dissolved	DETSC 2306	0.16	ug/l	0.57	1.5	0.18
Cadmium, Dissolved	DETSC 2306	0.03	ug/l	< 0.03	< 0.03	< 0.03
Chromium, Dissolved	DETSC 2306	0.25	ug/l	0.34	0.87	< 0.25
Copper, Dissolved	DETSC 2306	0.4	ug/l	1.1	2.6	0.4
Lead, Dissolved	DETSC 2306	0.09	ug/l	0.47	0.92	< 0.09
Mercury, Dissolved	DETSC 2306	0.01	ug/l	< 0.01	< 0.01	< 0.01
Nickel, Dissolved	DETSC 2306	0.5	ug/l	< 0.5	1.3	< 0.5
Selenium, Dissolved	DETSC 2306	0.25	ug/l	0.49	0.58	0.38
Zinc, Dissolved	DETSC 2306	1.3	ug/l	1.3	3.5	< 1.3
Inorganics						
pH	DETSC 2008			6.8	6.6	6.8
Cyanide, Free	DETSC 2130	20	ug/l	< 20	< 20	< 20
Sulphate as SO4	DETSC 2055	0.1	mg/l	2.3	2.3	4.1
PAHs						
Naphthalene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Acenaphthylene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Acenaphthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Fluorene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Phenanthrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Pyrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Chrysene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-c,d)pyrene	DETSC 3304*	0.01	ug/l	< 0.01	< 0.01	< 0.01
Dibenzo(a,h)anthracene	DETSC 3304	0.01	ug/l	< 0.01	< 0.01	< 0.01
Benzo(g,h,i)perylene	DETSC 3304*	0.01	ug/l	< 0.01	< 0.01	< 0.01
PAH Total	DETSC 3304	0.04	ug/l	< 0.04	< 0.04	< 0.04
Phenols						
Phenol	*	0.5	ug/l	< 0.50	< 0.50	< 0.50

Summary of Asbestos Analysis Soil Samples

Our Ref 17-94765

Client Ref

Contract Title CAPITAL PARK,JUNCTION 37,DODWORTH

Lab No	Sample ID	Material Type	Result	Comment*	Analyst
1145887	TP14 0.00-0.50	SOIL	NAD	none	Colin Patrick
1145888	TP16 0.50-1.00	SOIL	NAD	none	Colin Patrick
1145889	TP17 0.00-0.50	SOIL	NAD	none	Colin Patrick
1145890	TP18 1.00-1.40	SOIL	NAD	none	Colin Patrick
1145891	TP20 1.00-1.50	SOIL	NAD	none	Colin Patrick
1145892	TP21 0.00-0.50	SOIL	NAD	none	Colin Patrick
1145893	TP12 (SPB) 0.00-0.50	SOIL	NAD	none	Colin Patrick
1145894	TP12A(SP) 0.50-1.00	SOIL	NAD	none	Colin Patrick

Crocidolite = Blue Asbestos, Amosite = Brown Asbestos, Chrysotile = White Asbestos. Anthophyllite, Actinolite and Tremolite are other forms of Asbestos. Samples are analysed by DETSC 1101 using polarised light microscopy in accordance with HSG248 and documented in-house methods. NAD = No Asbestos Detected. Where a sample is NAD, the result is based on analysis of at least 2 sub-samples and should be taken to mean 'no asbestos detected in sample'. Key: * - not included in laboratory scope of accreditation.

Information in Support of the Analytical Results

Our Ref 17-94765

Client Ref

Contract CAPITAL PARK,JUNCTION 37,DODWORTH

Containers Received & Deviating Samples

Lab No	Sample ID	Date Sampled	Containers Received	Holding time exceeded for tests	Inappropriate container for tests
1145887	TP14 0.00-0.50 SOIL	14/03/17	GJ 250ml, PT 1L		
1145888	TP16 0.50-1.00 SOIL	14/03/17	GJ 250ml, PT 1L		
1145889	TP17 0.00-0.50 SOIL	14/03/17	GJ 250ml, PT 1L		
1145890	TP18 1.00-1.40 SOIL	16/03/17	GJ 250ml, PT 1L		
1145891	TP20 1.00-1.50 SOIL	16/03/17	GJ 250ml, PT 1L		
1145892	TP21 0.00-0.50 SOIL	16/03/17	GJ 250ml, PT 1L		
1145893	TP12 (SPB) 0.00-0.50 SOIL	16/03/17	GJ 250ml, GV, PT 1L		
1145894	TP12A(SPB) 0.50-1.00 SOIL	16/03/17	GJ 250ml, GV, PT 1L		
1146233	TP14 0.00-0.50 LEACHATE	14/03/17	GJ 250ml, PT 1L		
1146234	TP16 0.50-1.00 LEACHATE	14/03/17	GJ 250ml, PT 1L		
1146235	TP17 0.00-0.50 LEACHATE	14/03/17	GJ 250ml, PT 1L		
1146236	TP18 1.00-1.40 LEACHATE	16/03/17	GJ 250ml, PT 1L		
1146237	TP20 1.00-1.50 LEACHATE	16/03/17	GJ 250ml, PT 1L		
1146238	TP21 0.00-0.50 LEACHATE	16/03/17	GJ 250ml, PT 1L		
1146239	TP12 (SPB) 0.00-0.50 LEACHATE	16/03/17	GJ 250ml, GV, PT 1L		
1146240	TP12A(SPB) 0.50-1.00 LEACHATE	16/03/17	GJ 250ml, GV, PT 1L		

Key: G-Glass P-Plastic J-Jar T-Tub V-Vial

DETS cannot be held responsible for the integrity of samples received whereby the laboratory did not undertake the sampling. In this instance samples received may be deviating. Deviating Sample criteria are based on British and International standards and laboratory trials in conjunction with the UKAS note 'Guidance on Deviating Samples'. All samples received are listed above. However, those samples that have additional comments in relation to hold time, inappropriate containers etc are deviating due to the reasons stated. This means that the analysis is accredited where applicable, but results may be compromised due to sample deviations. If no sampled date (soils) or date+time (waters) has been supplied then samples are deviating. However, if you are able to supply a sampled date (and time for waters) this will prevent samples being reported as deviating where specific hold times are not exceeded and where the container supplied is suitable.

Soil Analysis Notes

Inorganic soil analysis was carried out on a dried sample, crushed to pass a 425µm sieve, in accordance with BS1377.

Organic soil analysis was carried out on an 'as received' sample. Organics results are corrected for moisture and expressed on a dry weight basis.

The Loss on Drying, used to express organics analysis on an air dried basis, is carried out at a temperature of 28°C +/-2°C.

Disposal

From the issue date of this test certificate, samples will be held for the following times prior to disposal :-

Soils - 1 month, Liquids - 2 weeks, Asbestos (test portion) - 6 months



Certificate of Analysis

Certificate Number 17-96039

06-Apr-17

Client JPG (Leeds) LTD
Civil & Structural Engineers
5 John Charles Way
Leeds
LS12 6QD

Our Reference 17-96039

Client Reference 2450

Order No (not supplied)

Contract Title CAPITAL PARK, JUNCTION 37, DODWORTH

Description One Water sample.

Date Received 31-Mar-17

Date Started 31-Mar-17

Date Completed 06-Apr-17

Test Procedures Identified by prefix DETSn (details on request).

Notes Opinions and interpretations are outside the scope of UKAS accreditation. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. Observations and interpretations are outside the scope of ISO 17025. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved By

Rob Brown
Business Manager



Summary of Chemical Analysis

Water Samples

Our Ref 17-96039

Client Ref 2450

Contract Title CAPITAL PARK,JUNCTION 37, DODWORTH

Lab No	1152804
Sample ID	RO 01
Depth	
Other ID	
Sample Type	WATER
Sampling Date	28/03/17
Sampling Time	n/s

Test	Method	LOD	Units	
Metals				
Arsenic, Dissolved	DETSC 2306	0.16	ug/l	0.46
Cadmium, Dissolved	DETSC 2306	0.03	ug/l	0.21
Chromium, Dissolved	DETSC 2306	0.25	ug/l	< 0.25
Copper, Dissolved	DETSC 2306	0.4	ug/l	0.5
Lead, Dissolved	DETSC 2306	0.09	ug/l	< 0.09
Mercury, Dissolved	DETSC 2306	0.01	ug/l	< 0.01
Nickel, Dissolved	DETSC 2306	0.5	ug/l	12
Selenium, Dissolved	DETSC 2306	0.25	ug/l	0.86
Zinc, Dissolved	DETSC 2306	1.3	ug/l	19
Inorganics				
pH	DETSC 2008			6.4
Cyanide, Free	DETSC 2130	20	ug/l	< 20
Sulphate as SO4	DETSC 2055	0.1	mg/l	79
PAHs				
Naphthalene	DETSC 3304	0.01	ug/l	< 0.01
Acenaphthylene	DETSC 3304	0.01	ug/l	< 0.01
Acenaphthene	DETSC 3304	0.01	ug/l	< 0.01
Fluorene	DETSC 3304	0.01	ug/l	< 0.01
Phenanthrene	DETSC 3304	0.01	ug/l	< 0.01
Anthracene	DETSC 3304	0.01	ug/l	< 0.01
Fluoranthene	DETSC 3304	0.01	ug/l	< 0.01
Pyrene	DETSC 3304	0.01	ug/l	< 0.01
Benzo(a)anthracene	DETSC 3304	0.01	ug/l	< 0.01
Chrysene	DETSC 3304	0.01	ug/l	< 0.01
Benzo(b)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01
Benzo(k)fluoranthene	DETSC 3304	0.01	ug/l	< 0.01
Benzo(a)pyrene	DETSC 3304	0.01	ug/l	< 0.01
Indeno(1,2,3-c,d)pyrene	DETSC 3304*	0.01	ug/l	< 0.01
Dibenzo(a,h)anthracene	DETSC 3304	0.01	ug/l	< 0.01
Benzo(g,h,i)perylene	DETSC 3304*	0.01	ug/l	< 0.01
PAH Total	DETSC 3304	0.04	ug/l	< 0.04
Phenols				
Phenol	*	0.5	ug/l	< 0.50

Information in Support of the Analytical Results

Our Ref 17-96039
 Client Ref 2450
 Contract CAPITAL PARK,JUNCTION 37, DODWORTH


Containers Received & Deviating Samples

Lab No	Sample ID	Date Sampled	Containers Received	Holding time exceeded for tests	Inappropriate container for tests
1152804	RO 01 WATER	28/03/17	GB 1L, PB 1L		
Key: G-Glass P-Plastic B-Bottle DETS cannot be held responsible for the integrity of samples received whereby the laboratory did not undertake the sampling. In this instance samples received may be deviating. Deviating Sample criteria are based on British and International standards and laboratory trials in conjunction with the UKAS note 'Guidance on Deviating Samples'. All samples received are listed above. However, those samples that have additional comments in relation to hold time, inappropriate containers etc are deviating due to the reasons stated. This means that the analysis is accredited where applicable, but results may be compromised due to sample deviations. If no sampled date (soils) or date+time (waters) has been supplied then samples are deviating. However, if you are able to supply a sampled date (and time for waters) this will prevent samples being reported as deviating where specific hold times are not exceeded and where the container supplied is suitable.					

Disposal

From the issue date of this test certificate, samples will be held for the following times prior to disposal :- Soils - 1 month, Liquids - 2 weeks, Asbestos (test portion) - 6 months

Waste Classification Report



97JXM-JVTVM-2PD6Z

Job name

Capitol Park, Junction 37 - M1, Barnsley

Description/Comments

Project

2450-5

Site

Waste Stream Template

JPG CL WASTE STREAM V16

Classified by

Name:
Alex Nivlet
Date:
5/17/2017 1:33:52 PM UTC
Telephone:
0113 263 1155

Company:
JPG Leeds
5 John Charles Way
Leeds
LS12 6QA

Report

Created by: Alex Nivlet
Created date: 5/17/2017 13:33 UTC

Job summary

#	Sample Name	Depth [m]	Classification Result	Hazard properties	Page
1	TP01	0.00-0.20	Non Hazardous		2
2	TP02	0.00-0.20	Non Hazardous		4
3	TP05	0.00-0.30	Non Hazardous		6
4	TP06	0.00-0.50	Non Hazardous		8
5	TP09	0.00-0.10	Non Hazardous		10
6	TP08	0.00-0.20	Non Hazardous		12
7	TP14	0.00-0.50	Non Hazardous		14
8	TP18	1.00-1.40	Non Hazardous		16
9	TP20	1.00-1.50	Non Hazardous		18
10	TP21	0.00-0.50	Non Hazardous		20

Appendices	Page
Appendix A: Classifier defined and non CLP determinands	22
Appendix B: Rationale for selection of metal species	23
Appendix C: Version	24

Classification of sample: TP01

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	TP01	LoW Code:	Chapter:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
Sample Depth:	0.00-0.20 m	Entry:	17 05 04 (Soil and stones other than those mentioned in 17 05 03)	

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	7.7 mg/kg	1.32	10.167 mg/kg	0.00102 %			
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	<0.1 mg/kg	1.855	<0.185 mg/kg	<0.0000185 %			<LOD
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		17 mg/kg	1.462	24.846 mg/kg	0.00248 %			
4	chromium in chromium(VI) compounds { chromium(VI) oxide }	024-001-00-0	215-607-8	1333-82-0	<1 mg/kg	1.923	<1.923 mg/kg	<0.000192 %			<LOD
5	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	30 mg/kg	3.929	117.872 mg/kg	0.0118 %			
6	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			16 mg/kg		16 mg/kg	0.0016 %			
7	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
8	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	32 mg/kg	2.637	84.374 mg/kg	0.00844 %			
9	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
10	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	74 mg/kg	2.469	182.728 mg/kg	0.0183 %			
11	pH				7.7 pH		7.7 pH	7.7 pH			
12	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
13	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
14	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
17	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
19	fluoranthene	205-912-4	206-44-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
20	pyrene	204-927-3	129-00-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
21	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
29	phenol	604-001-00-2	203-632-7		<0.3 mg/kg		<0.3 mg/kg	<0.00003 %			<LOD
Total:									0.0441 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP02

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP02	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.20 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data		Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number									
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	5.5	mg/kg	1.32	7.262	mg/kg	0.000726 %		
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	0.1	mg/kg	1.855	0.185	mg/kg	0.0000185 %		
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		19	mg/kg	1.462	27.77	mg/kg	0.00278 %		
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	30	mg/kg	3.929	117.872	mg/kg	0.0118 %		
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			18	mg/kg		18	mg/kg	0.0018 %		
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05	mg/kg		<0.05	mg/kg	<0.000005 %		<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	35	mg/kg	2.637	92.284	mg/kg	0.00923 %		
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			0.6	mg/kg	2.554	1.532	mg/kg	0.000153 %		
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	78	mg/kg	2.469	192.605	mg/kg	0.0193 %		
10	pH		PH		6.4	pH		6.4	pH	6.4 pH		
11	pH: acid/alkali reserve				<0.1	gNaOH		<0.1	gNaOH	<0.1 gNaOH		<LOD
12	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1	mg/kg		<0.1	mg/kg	<0.00001 %		<LOD
13	acenaphthylene	205-917-1	208-96-8		<0.1	mg/kg		<0.1	mg/kg	<0.00001 %		<LOD
14	acenaphthene	201-469-6	83-32-9		<0.1	mg/kg		<0.1	mg/kg	<0.00001 %		<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
17	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	fluoranthene	205-912-4	206-44-0		0.4 mg/kg		0.4 mg/kg	0.00004 %			
19	pyrene	204-927-3	129-00-0		0.9 mg/kg		0.9 mg/kg	0.00009 %			
20	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
21	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	phenol	604-001-00-2	203-632-7		<0.3 mg/kg		<0.3 mg/kg	<0.00003 %			<LOD
Total:									0.0461 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP05

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP05	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.30 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	4.1 mg/kg	1.32	5.413	mg/kg	0.000541 %		
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	<0.1 mg/kg	1.855	<0.185	mg/kg	<0.0000185 %		<LOD
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		20 mg/kg	1.462	29.231	mg/kg	0.00292 %		
4	chromium in chromium(VI) compounds { chromium(VI) oxide }	024-001-00-0	215-607-8	1333-82-0	<1 mg/kg	1.923	<1.923	mg/kg	<0.000192 %		<LOD
5	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	31 mg/kg	3.929	121.801	mg/kg	0.0122 %		
6	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			13 mg/kg		13	mg/kg	0.0013 %		
7	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05	mg/kg	<0.000005 %		<LOD
8	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	39 mg/kg	2.637	102.831	mg/kg	0.0103 %		
9	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			<0.5 mg/kg	2.554	<1.277	mg/kg	<0.000128 %		<LOD
10	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	77 mg/kg	2.469	190.136	mg/kg	0.019 %		
11	pH				6.4 pH		6.4	pH	6.4 pH		
12	pH: acid/alkali reserve				<0.1 gNaOH		<0.1	gNaOH	<0.1 gNaOH		<LOD
13	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1	mg/kg	<0.00001 %		<LOD
14	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1	mg/kg	<0.00001 %		<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
17	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
19	fluoranthene	205-912-4	206-44-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
20	pyrene	204-927-3	129-00-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
21	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
29	phenol	604-001-00-2	203-632-7		<0.3 mg/kg		<0.3 mg/kg	<0.00003 %			<LOD
Total:									0.0468 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP06

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP06	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.50 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand	CLP index number	EC Number	CAS Number	CLP Note	User entered data	Conv. Factor	Compound conc.	Classification value	MC Applied	Conc. Not Used
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3		16 mg/kg	1.32	21.125 mg/kg	0.00211 %		
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4		0.1 mg/kg	1.855	0.185 mg/kg	0.0000185 %		
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9		1308-38-9		17 mg/kg	1.462	24.846 mg/kg	0.00248 %		
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8		32 mg/kg	3.929	125.73 mg/kg	0.0126 %		
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			1	15 mg/kg		15 mg/kg	0.0015 %		
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6		<0.05 mg/kg		<0.05 mg/kg	<0.000005 %		<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4		38 mg/kg	2.637	100.194 mg/kg	0.01 %		
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8				<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %		<LOD
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]		78 mg/kg	2.469	192.605 mg/kg	0.0193 %		
10	pH			PH		6.5 pH		6.5 pH	6.5 pH		
11	pH: acid/alkali reserve					<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH		<LOD
12	naphthalene	601-052-00-2	202-049-5	91-20-3		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
13	acenaphthylene	205-917-1		208-96-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
14	acenaphthene	201-469-6		83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.	Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number							
15	fluorene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		201-695-5	86-73-7							
16	phenanthrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		201-581-5	85-01-8							
17	anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		204-371-1	120-12-7							
18	fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-912-4	206-44-0							
19	pyrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		204-927-3	129-00-0							
20	benzo[a]anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-033-00-9	200-280-6	56-55-3							
21	chrysene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-048-00-0	205-923-4	218-01-9							
22	benzo[b]fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-034-00-4	205-911-9	205-99-2							
23	benzo[k]fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-036-00-5	205-916-6	207-08-9							
24	benzo[a]pyrene; benzo[def]chrysene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-032-00-3	200-028-5	50-32-8							
25	indeno[123-cd]pyrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-893-2	193-39-5							
26	dibenz[a,h]anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-041-00-2	200-181-8	53-70-3							
27	benzo[ghi]perylene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-883-8	191-24-2							
28	phenol				<0.3 mg/kg		<0.3 mg/kg	<0.00003 %		<LOD
	604-001-00-2	203-632-7	108-95-2							
Total:								0.0483 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP09

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP09	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.10 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	9.8 mg/kg	1.32	12.939 mg/kg	0.00129 %			
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	0.2 mg/kg	1.855	0.371 mg/kg	0.0000371 %			
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		18 mg/kg	1.462	26.308 mg/kg	0.00263 %			
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	28 mg/kg	3.929	110.013 mg/kg	0.011 %			
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			17 mg/kg		17 mg/kg	0.0017 %			
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	39 mg/kg	2.637	102.831 mg/kg	0.0103 %			
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	88 mg/kg	2.469	217.298 mg/kg	0.0217 %			
10	pH		PH		6.8 pH		6.8 pH	6.8 pH			
11	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
12	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
13	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
14	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.	Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number							
15	fluorene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		201-695-5	86-73-7							
16	phenanthrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		201-581-5	85-01-8							
17	anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		204-371-1	120-12-7							
18	fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-912-4	206-44-0							
19	pyrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		204-927-3	129-00-0							
20	benzo[a]anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-033-00-9	200-280-6	56-55-3							
21	chrysene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-048-00-0	205-923-4	218-01-9							
22	benzo[b]fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-034-00-4	205-911-9	205-99-2							
23	benzo[k]fluoranthene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-036-00-5	205-916-6	207-08-9							
24	benzo[a]pyrene; benzo[def]chrysene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-032-00-3	200-028-5	50-32-8							
25	indeno[123-cd]pyrene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-893-2	193-39-5							
26	dibenz[a,h]anthracene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
	601-041-00-2	200-181-8	53-70-3							
27	benzo[ghi]perylene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
		205-883-8	191-24-2							
28	phenol				<0.3 mg/kg		<0.3 mg/kg	<0.00003 %		<LOD
	604-001-00-2	203-632-7	108-95-2							
Total:								0.049 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP08

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP08	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.20 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	14 mg/kg	1.32	18.485 mg/kg		0.00185 %		
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	0.2 mg/kg	1.855	0.371 mg/kg		0.0000371 %		
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		20 mg/kg	1.462	29.231 mg/kg		0.00292 %		
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	25 mg/kg	3.929	98.226 mg/kg		0.00982 %		
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			29 mg/kg		29 mg/kg		0.0029 %		
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05 mg/kg		<0.000005 %		<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	15 mg/kg	2.637	39.55 mg/kg		0.00396 %		
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			0.8 mg/kg	2.554	2.043 mg/kg		0.000204 %		
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	87 mg/kg	2.469	214.829 mg/kg		0.0215 %		
10	pH		PH		7.1 pH		7.1 pH		7.1 pH		
11	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH		<0.1 gNaOH		<LOD
12	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1 mg/kg		<0.00001 %		<LOD
13	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1 mg/kg		<0.00001 %		<LOD
14	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg		<0.00001 %		<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	phenanthrene	201-581-5	85-01-8		0.2 mg/kg		0.2 mg/kg	0.00002 %			
17	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	fluoranthene	205-912-4	206-44-0		0.4 mg/kg		0.4 mg/kg	0.00004 %			
19	pyrene	204-927-3	129-00-0		0.4 mg/kg		0.4 mg/kg	0.00004 %			
20	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
21	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	phenol	604-001-00-2	203-632-7		<0.3 mg/kg		<0.3 mg/kg	<0.00003 %			<LOD
Total:									0.0434 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP14

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP14	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.50 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }				11 mg/kg	1.32	14.524 mg/kg	0.00145 %			
	033-003-00-0	215-481-4	1327-53-3								
2	cadmium { cadmium sulfate }				0.2 mg/kg	1.855	0.371 mg/kg	0.0000371 %			
	048-009-00-9	233-331-6	10124-36-4								
3	chromium in chromium(III) compounds { chromium(III) oxide }				19 mg/kg	1.462	27.77 mg/kg	0.00278 %			
		215-160-9	1308-38-9								
4	chromium in chromium(VI) compounds { chromium(VI) oxide }				<1 mg/kg	1.923	<1.923 mg/kg	<0.000192 %			<LOD
	024-001-00-0	215-607-8	1333-82-0								
5	copper { copper sulphate pentahydrate }				35 mg/kg	3.929	137.517 mg/kg	0.0138 %			
	029-023-00-4	231-847-6	7758-99-8								
6	lead { lead compounds with the exception of those specified elsewhere in this Annex }			1	25 mg/kg		25 mg/kg	0.0025 %			
	082-001-00-6										
7	mercury { mercury }				<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
	080-001-00-0	231-106-7	7439-97-6								
8	nickel { nickel sulfate }				26 mg/kg	2.637	68.554 mg/kg	0.00686 %			
	028-009-00-5	232-104-9	7786-81-4								
9	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }				<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
	034-002-00-8										
10	zinc { zinc sulphate }				76 mg/kg	2.469	187.667 mg/kg	0.0188 %			
	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]								
11	pH				7.6 pH		7.6 pH	7.6 pH			
12	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
13	naphthalene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
	601-052-00-2	202-049-5	91-20-3								
14	acenaphthylene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
		205-917-1	208-96-8								

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
17	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
19	fluoranthene	205-912-4	206-44-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
20	pyrene	204-927-3	129-00-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
21	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
29	phenol	604-001-00-2	203-632-7		0.4 mg/kg		0.4 mg/kg	0.00004 %			
Total:									0.0467 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP18

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP18	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
1.00-1.40 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	5.9 mg/kg	1.32	7.79 mg/kg	0.000779 %			
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	0.1 mg/kg	1.855	0.185 mg/kg	0.0000185 %			
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		19 mg/kg	1.462	27.77 mg/kg	0.00278 %			
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	34 mg/kg	3.929	133.588 mg/kg	0.0134 %			
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			17 mg/kg		17 mg/kg	0.0017 %			
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	47 mg/kg	2.637	123.924 mg/kg	0.0124 %			
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	89 mg/kg	2.469	219.767 mg/kg	0.022 %			
10	pH		PH		6.8 pH		6.8 pH	6.8 pH			
11	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
12	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
13	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
14	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.	Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number							
15	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
16	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
17	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
18	fluoranthene	205-912-4	206-44-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
19	pyrene	204-927-3	129-00-0		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
20	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
21	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
22	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
23	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
24	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
25	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
26	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
27	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %		<LOD
28	phenol	604-001-00-2	203-632-7		0.4 mg/kg		0.4 mg/kg	0.00004 %		
Total:								0.0533 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Classification of sample: TP20

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP20	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
1.00-1.50 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }	033-003-00-0	215-481-4	1327-53-3	9.1 mg/kg	1.32	12.015 mg/kg	0.0012 %			
2	cadmium { cadmium sulfate }	048-009-00-9	233-331-6	10124-36-4	0.1 mg/kg	1.855	0.185 mg/kg	0.0000185 %			
3	chromium in chromium(III) compounds { chromium(III) oxide }	215-160-9	1308-38-9		18 mg/kg	1.462	26.308 mg/kg	0.00263 %			
4	copper { copper sulphate pentahydrate }	029-023-00-4	231-847-6	7758-99-8	33 mg/kg	3.929	129.659 mg/kg	0.013 %			
5	lead { lead compounds with the exception of those specified elsewhere in this Annex }	082-001-00-6			22 mg/kg		22 mg/kg	0.0022 %			
6	mercury { mercury }	080-001-00-0	231-106-7	7439-97-6	<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
7	nickel { nickel sulfate }	028-009-00-5	232-104-9	7786-81-4	30 mg/kg	2.637	79.101 mg/kg	0.00791 %			
8	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }	034-002-00-8			<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
9	zinc { zinc sulphate }	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	72 mg/kg	2.469	177.789 mg/kg	0.0178 %			
10	pH		PH		8.2 pH		8.2 pH	8.2 pH			
11	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
12	cyanides { salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide and those specified elsewhere in this Annex }	006-007-00-5			<10 mg/kg	1.884	<18.84 mg/kg	<0.00188 %			<LOD
13	naphthalene	601-052-00-2	202-049-5	91-20-3	<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
14	acenaphthylene	205-917-1	208-96-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
15	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	fluorene	201-695-5	86-73-7		0.3 mg/kg		0.3 mg/kg	0.00003 %			
17	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
19	fluoranthene	205-912-4	206-44-0		0.1 mg/kg		0.1 mg/kg	0.00001 %			
20	pyrene	204-927-3	129-00-0		0.1 mg/kg		0.1 mg/kg	0.00001 %			
21	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
29	phenol	604-001-00-2	203-632-7		0.4 mg/kg		0.4 mg/kg	0.00004 %			
Total:									0.0469 %		

Key

	User supplied data
	Determinand values ignored for classification, see column 'Conc. Not Used' for reason
■	Determinand defined or amended by HazWasteOnline (see Appendix A)
🧪	Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
<LOD	Below limit of detection
CLP: Note 1	Only the metal concentration has been used for classification

Classification of sample: TP21

✔ **Non Hazardous Waste**
Classified as **17 05 04**
in the List of Waste

Sample details

Sample Name:	LoW Code:
TP21	Chapter:
Sample Depth:	17: Construction and Demolition Wastes (including excavated soil from contaminated sites)
0.00-0.50 m	Entry:
	17 05 04 (Soil and stones other than those mentioned in 17 05 03)

Hazard properties

None identified

Determinands

Moisture content: 0% No Moisture Correction applied (MC)

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
1	arsenic { arsenic trioxide }				5.2 mg/kg	1.32	6.866 mg/kg	0.000687 %			
	033-003-00-0	215-481-4	1327-53-3								
2	cadmium { cadmium sulfate }				0.1 mg/kg	1.855	0.185 mg/kg	0.0000185 %			
	048-009-00-9	233-331-6	10124-36-4								
3	chromium in chromium(III) compounds { chromium(III) oxide }				24 mg/kg	1.462	35.077 mg/kg	0.00351 %			
		215-160-9	1308-38-9								
4	chromium in chromium(VI) compounds { chromium(VI) oxide }				<1 mg/kg	1.923	<1.923 mg/kg	<0.000192 %			<LOD
	024-001-00-0	215-607-8	1333-82-0								
5	copper { copper sulphate pentahydrate }				35 mg/kg	3.929	137.517 mg/kg	0.0138 %			
	029-023-00-4	231-847-6	7758-99-8								
6	lead { lead compounds with the exception of those specified elsewhere in this Annex }			1	16 mg/kg		16 mg/kg	0.0016 %			
	082-001-00-6										
7	mercury { mercury }				<0.05 mg/kg		<0.05 mg/kg	<0.000005 %			<LOD
	080-001-00-0	231-106-7	7439-97-6								
8	nickel { nickel sulfate }				31 mg/kg	2.637	81.737 mg/kg	0.00817 %			
	028-009-00-5	232-104-9	7786-81-4								
9	selenium { selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex }				<0.5 mg/kg	2.554	<1.277 mg/kg	<0.000128 %			<LOD
	034-002-00-8										
10	zinc { zinc sulphate }				77 mg/kg	2.469	190.136 mg/kg	0.019 %			
	030-006-00-9	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]								
11	pH				7.9 pH		7.9 pH	7.9 pH			
12	pH: acid/alkali reserve				<0.1 gNaOH		<0.1 gNaOH	<0.1 gNaOH			<LOD
13	naphthalene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
	601-052-00-2	202-049-5	91-20-3								
14	acenaphthylene				<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
		205-917-1	208-96-8								

#	Determinand			CLP Note	User entered data	Conv. Factor	Compound conc.		Classification value	MC Applied	Conc. Not Used
	CLP index number	EC Number	CAS Number								
15	acenaphthene	201-469-6	83-32-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
16	fluorene	201-695-5	86-73-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
17	phenanthrene	201-581-5	85-01-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
18	anthracene	204-371-1	120-12-7		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
19	fluoranthene	205-912-4	206-44-0		0.2 mg/kg		0.2 mg/kg	0.00002 %			
20	pyrene	204-927-3	129-00-0		0.2 mg/kg		0.2 mg/kg	0.00002 %			
21	benzo[a]anthracene	601-033-00-9	200-280-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
22	chrysene	601-048-00-0	205-923-4		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
23	benzo[b]fluoranthene	601-034-00-4	205-911-9		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
24	benzo[k]fluoranthene	601-036-00-5	205-916-6		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
25	benzo[a]pyrene; benzo[def]chrysene	601-032-00-3	200-028-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
26	indeno[123-cd]pyrene	205-893-2	193-39-5		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
27	dibenz[a,h]anthracene	601-041-00-2	200-181-8		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
28	benzo[ghi]perylene	205-883-8	191-24-2		<0.1 mg/kg		<0.1 mg/kg	<0.00001 %			<LOD
29	phenol	604-001-00-2	203-632-7		<0.3 mg/kg		<0.3 mg/kg	<0.00003 %			<LOD
Total:									0.0473 %		

Key

- User supplied data
- Determinand values ignored for classification, see column 'Conc. Not Used' for reason
- Determinand defined or amended by HazWasteOnline (see Appendix A)
- Speciated Determinand - Unless the Determinand is Note 1, the Conversion Factor is used to calculate the compound concentration
- <LOD** Below limit of detection
- CLP: Note 1 Only the metal concentration has been used for classification

Appendix A: Classifier defined and non CLP determinands

■ chromium(III) oxide (EC Number: 215-160-9, CAS Number: 1308-38-9)

Conversion factor: 1.462

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 7/17/2015

Risk Phrases: R20 , R22 , R36 , R37 , R38 , R42 , R43 , R50/53 , R60 , R61

Hazard Statements: Acute Tox. 4 H332 , Acute Tox. 4 H302 , Eye Irrit. 2 H319 , STOT SE 3 H335 , Skin Irrit. 2 H315 , Resp. Sens. 1 H334 , Skin Sens. 1 H317 , Repr. 1B H360FD , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

■ copper sulphate pentahydrate (EC Number: 231-847-6, CAS Number: 7758-99-8)

CLP index number: 029-023-00-4

Data source: Regulation (EU) 2016/1179 of 19 July 2016 (ATP9)

Additional Risk Phrases: N R50/53 , N R50/53 >= 2.5 %

Additional Hazard Statement(s): None.

Reason for additional Hazards Statement(s)/Risk Phrase(s):

10/10/2016 - N R50/53 risk phrase sourced from: WM3 v1 still uses ecotoxic risk phrases

10/10/2016 - N R50/53 >= 2.5 % risk phrase sourced from: WM3 v1 still uses ecotoxic risk phrases

■ lead compounds with the exception of those specified elsewhere in this Annex

CLP index number: 082-001-00-6

Data source: Regulation 1272/2008/EC - Classification, labelling and packaging of substances and mixtures. (CLP)

Additional Risk Phrases: None.

Additional Hazard Statement(s): Carc. 2 H351

Reason for additional Hazards Statement(s)/Risk Phrase(s):

6/3/2015 - Carc. 2 H351 hazard statement sourced from: IARC Group 2A (Sup 7, 87) 2006; Lead REACH Consortium

www.reach-lead.eu/substanceinformation.html. Review date 29/09/2015

■ pH (CAS Number: PH)

Description/Comments: Appendix C4

Data source: WM3 1st Edition 2015

Data source date: 5/25/2015

Risk Phrases: None.

Hazard Statements: None.

■ pH: acid/alkali reserve

Description/Comments: Appendix C4; unit: grams of sodium hydroxide (equivalent) per 100g of substance required to adjust the pH to the appropriate value

Data source: WM3 1st Edition 2015

Data source date: 5/25/2015

Risk Phrases: None.

Hazard Statements: None.

■ acenaphthylene (EC Number: 205-917-1, CAS Number: 208-96-8)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 7/17/2015

Risk Phrases: R22 , R26 , R27 , R36 , R37 , R38

Hazard Statements: Acute Tox. 4 H302 , Acute Tox. 1 H330 , Acute Tox. 1 H310 , Eye Irrit. 2 H319 , STOT SE 3 H335 , Skin Irrit. 2 H315

■ acenaphthene (EC Number: 201-469-6, CAS Number: 83-32-9)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 7/17/2015

Risk Phrases: R36 , R37 , R38 , N R50/53 , N R51/53

Hazard Statements: Eye Irrit. 2 H319 , STOT SE 3 H335 , Skin Irrit. 2 H315 , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410 , Aquatic Chronic 2 H411

■ fluorene (EC Number: 201-695-5, CAS Number: 86-73-7)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 8/6/2015

Risk Phrases: N R50/53

Hazard Statements: Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

• **phenanthrene** (EC Number: 201-581-5, CAS Number: 85-01-8)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 8/6/2015

Risk Phrases: R22 , R36 , R37 , R38 , R40 , R43 , N R50/53

Hazard Statements: Acute Tox. 4 H302 , Eye Irrit. 2 H319 , STOT SE 3 H335 , Carc. 2 H351 , Skin Sens. 1 H317 , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410 , Skin Irrit. 2 H315

• **anthracene** (EC Number: 204-371-1, CAS Number: 120-12-7)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 7/17/2015

Risk Phrases: R36 , R37 , R38 , R43 , N R50/53

Hazard Statements: Eye Irrit. 2 H319 , STOT SE 3 H335 , Skin Irrit. 2 H315 , Skin Sens. 1 H317 , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

• **fluoranthene** (EC Number: 205-912-4, CAS Number: 206-44-0)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 8/21/2015

Risk Phrases: Xn R22 , N R50/53

Hazard Statements: Acute Tox. 4 H302 , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

• **pyrene** (EC Number: 204-927-3, CAS Number: 129-00-0)

Description/Comments: Data from C&L Inventory Database; SDS Sigma Aldrich 2014

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 8/21/2015

Risk Phrases: Xi R36/37/38 , N R50/53

Hazard Statements: Skin Irrit. 2 H315 , Eye Irrit. 2 H319 , STOT SE 3 H335 , Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

• **indeno[123-cd]pyrene** (EC Number: 205-893-2, CAS Number: 193-39-5)

Description/Comments: Data from C&L Inventory Database

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 8/6/2015

Risk Phrases: R40

Hazard Statements: Carc. 2 H351

• **benzo[ghi]perylene** (EC Number: 205-883-8, CAS Number: 191-24-2)

Description/Comments: Data from C&L Inventory Database; SDS Sigma Aldrich 28/02/2015

Data source: <http://echa.europa.eu/web/guest/information-on-chemicals/cl-inventory-database>

Data source date: 7/23/2015

Risk Phrases: N R50/53

Hazard Statements: Aquatic Acute 1 H400 , Aquatic Chronic 1 H410

• **salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide and those specified elsewhere in this Annex**

CLP index number: 006-007-00-5

Data source: Commission Regulation (EC) No 790/2009 - 1st Adaptation to Technical Progress for Regulation (EC) No 1272/2008. (ATP1)

Additional Risk Phrases: None.

Additional Hazard Statement(s): EUH032 >= 0.2 %

Reason for additional Hazards Statement(s)/Risk Phrase(s):

12/14/2015 - EUH032 >= 0.2 % hazard statement sourced from: WM3, Table C12.2

Appendix B: Rationale for selection of metal species

arsenic {arsenic trioxide}

Worst case species based on hazard statements

cadmium {cadmium sulfate}

Worst case species based on hazard statements

chromium in chromium(III) compounds {chromium(III) oxide}

Worst case species based on hazard statements

chromium in chromium(VI) compounds {chromium(VI) oxide}

Worst case species based on hazard statements

copper {copper sulphate pentahydrate}

Most likely common species

lead {lead compounds with the exception of those specified elsewhere in this Annex}

Worst case species based on hazard statements

mercury {mercury}

Worst case species based on hazard statements

nickel {nickel sulfate}

Worst case species based on hazard statements

selenium {selenium compounds with the exception of cadmium sulphoselenide and those specified elsewhere in this Annex}

Worst case species based on hazard statements

zinc {zinc sulphate}

Worst case species based on hazard statements

cyanides {salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide and those specified elsewhere in this Annex}

Worst case species

Appendix C: Version

HazWasteOnline Classification Engine: **WM3 1st Edition, May 2015**

HazWasteOnline Classification Engine Version: 2017.129.3312.6648 (09 May 2017)

HazWasteOnline Database: 2017.129.3312.6648 (09 May 2017)

This classification utilises the following guidance and legislation:

WM3 - Waste Classification - May 2015

CLP Regulation - Regulation 1272/2008/EC of 16 December 2008

1st ATP - Regulation 790/2009/EC of 10 August 2009

2nd ATP - Regulation 286/2011/EC of 10 March 2011

3rd ATP - Regulation 618/2012/EU of 10 July 2012

4th ATP - Regulation 487/2013/EU of 8 May 2013

Correction to 1st ATP - Regulation 758/2013/EU of 7 August 2013

5th ATP - Regulation 944/2013/EU of 2 October 2013

6th ATP - Regulation 605/2014/EU of 5 June 2014

WFD Annex III replacement - Regulation 1357/2014/EU of 18 December 2014

Revised List of Wastes 2014 - Decision 2014/955/EU of 18 December 2014

7th ATP - Regulation 2015/1221/EU of 24 July 2015

8th ATP - Regulation (EU) 2016/918 of 19 May 2016

9th ATP - Regulation (EU) 2016/1179 of 19 July 2016

POPs Regulation 2004 - Regulation 850/2004/EC of 29 April 2004

1st ATP to POPs Regulation - Regulation 756/2010/EU of 24 August 2010

2nd ATP to POPs Regulation - Regulation 757/2010/EU of 24 August 2010



Appendix D Geotechnical Testing Results



LABORATORY REPORT



4043

Contract Number: PSL17/1324

Report Date: 11 April 2017
Client's Reference: 2450
Client Name: JPG Leeds
5 John Charles Way
Leeds
West Yorkshire
LS12 6QD

For the attention of: John Parkinson

Contract Title: Capitol Park, Junction 37 (M1), Dodworth.
Date Received: 20/3/2017
Date Commenced: 20/3/2017
Date Completed: 11/4/2017

Notes: Opinions and Interpretations are outside the UKAS Accreditation

A copy of the Laboratory Schedule of accredited tests as issued by UKAS is attached to this report. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. This certificate shall not be reproduced other than in full, without the prior written approval of the laboratory.

Checked and Approved Signatories:

R Gunson
(Director)

L Knight
(Senior Technician)

A Watkins
(Director)

S Royle
(Senior Technician)

R Berriman
(Quality Manager)

A Fry
(Senior Technician)

5 – 7 Hexthorpe Road, Hexthorpe,
Doncaster DN4 0AR
tel: +44 (0)844 815 6641
fax: +44 (0)844 815 6642
e-mail: rgunson@prosoils.co.uk
awatkins@prosoils.co.uk

Page 1 of

SUMMARY OF SOIL CLASSIFICATION TESTS

(BS1377 : PART 2 : 1990)

Hole Number	Sample Number	Sample Type	Top Depth m	Base Depth m	Moisture Content % Clause 3.2	Particle Density Mg/m ³ Clause 8.2	Liquid Limit % Clause 4.3/4	Plastic Limit % Clause 5.3	Plasticity Index % Clause 5.4	Passing .425mm %	Remarks
TP02		D	0.20	0.50	7.6						
TP03		D	0.10	0.20	7.9						
TP04		D	0.00	0.50	17		45	23	22	100	Intermediate plasticity CI.
TP08		D	0.20	0.40	6.2						
TP11		D	2.10	2.60	30		64	30	34	100	High plasticity CH.
TP14		D	1.10	1.50	20		59	28	31	94	High plasticity CH.
TP15		D	0.30	0.80	18		48	25	23	100	Intermediate plasticity CI.
TP19		D	2.50	2.60	25		61	29	32	95	High plasticity CH.
BH01		B	0.00	1.00	21	2.52					
TP12(SPB)		B	1.30	1.80	19	2.65					
TP13		B	0.50	1.00							
TP20(SPA)		B	1.00	1.50	13	2.65					

SYMBOLS : NP : Non Plastic

* : Liquid Limit and Plastic Limit Wet Sieved.




Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450

PLASTICITY CHART FOR CASAGRANDE CLASSIFICATION.

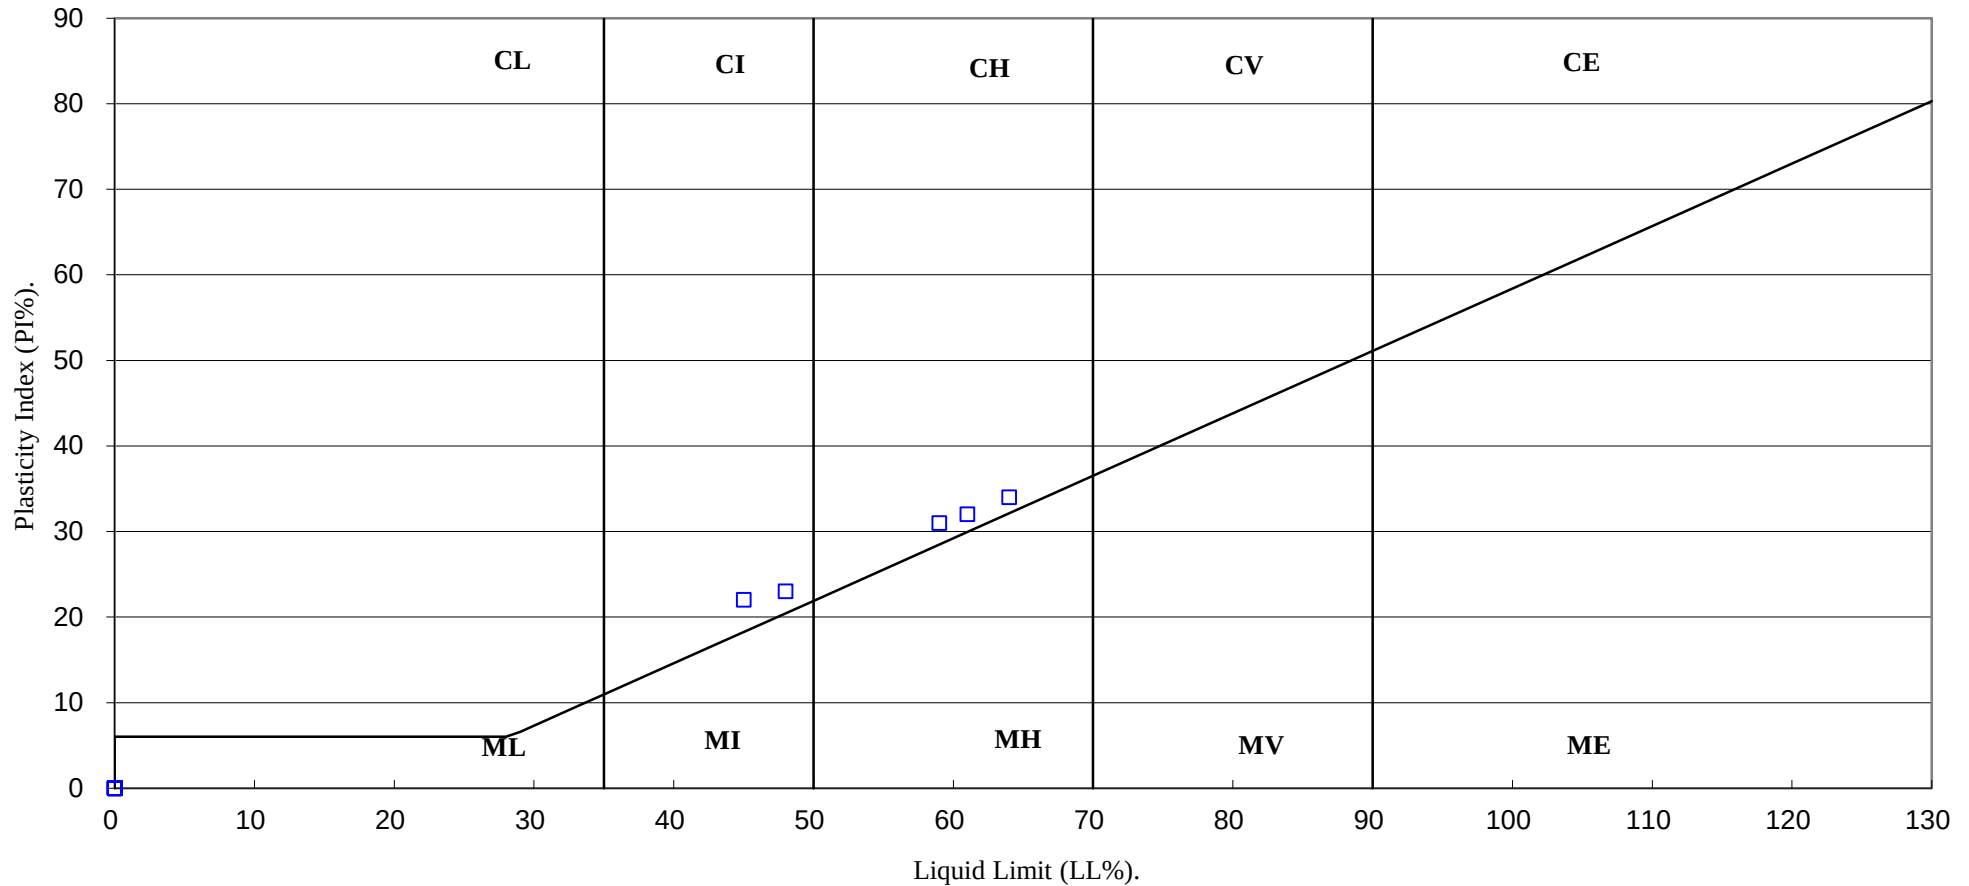(BS5930 :2015)



PSL
Professional Soils Laboratory

Capitol Park, Junction 37 (M1), Dodworth

Contract No:

PSL17/1324

Client Ref:

2450

SUMMARY OF LABORATORY SOIL DESCRIPTIONS

Hole Number	Sample Number	Sample Type	Top Depth m	Base Depth m	Description of Sample
TP02		D	0.20	0.50	Brown gravel of MUDSTONE.
TP03		D	0.10	0.20	Brown gravel of MUDSTONE.
TP04		D	0.00	0.50	Brown mottled grey sandy silty CLAY.
TP08		D	0.20	0.40	Brown GRAVEL.
TP11		D	2.10	2.60	Brown mottled grey slightly sandy silty CLAY.
TP14		D	1.10	1.50	Brown mottled grey slightly gravelly slightly sandy silty CLAY.
TP15		D	0.30	0.80	Brown mottled grey slightly sandy silty CLAY.
TP19		D	2.50	2.60	Brown slightly gravelly slightly sandy silty CLAY.
BH01		B	0.00	1.00	Brown very gravelly sandy CLAY with cobbles.
TP12(SPB)		B	1.30	1.80	Brown mottled grey gravelly sandy CLAY.
TP13		B	0.50	1.00	Brown mottled grey very gravelly slightly sandy CLAY.
TP20(SPA)		B	1.00	1.50	Brown very gravelly sandy CLAY with cobbles.



Capitol Park, Junction 37 (M1), Dodworth

Contract No:

PSL17/1324

Client Ref:

2450

PARTICLE SIZE DISTRIBUTION TEST


BS1377 : Part 2 : 1990

Wet Sieve, Clause 9.2

Hole Number: BH01 Top Depth (m): 0.00

Sample Number: Base Depth(m): 0.10

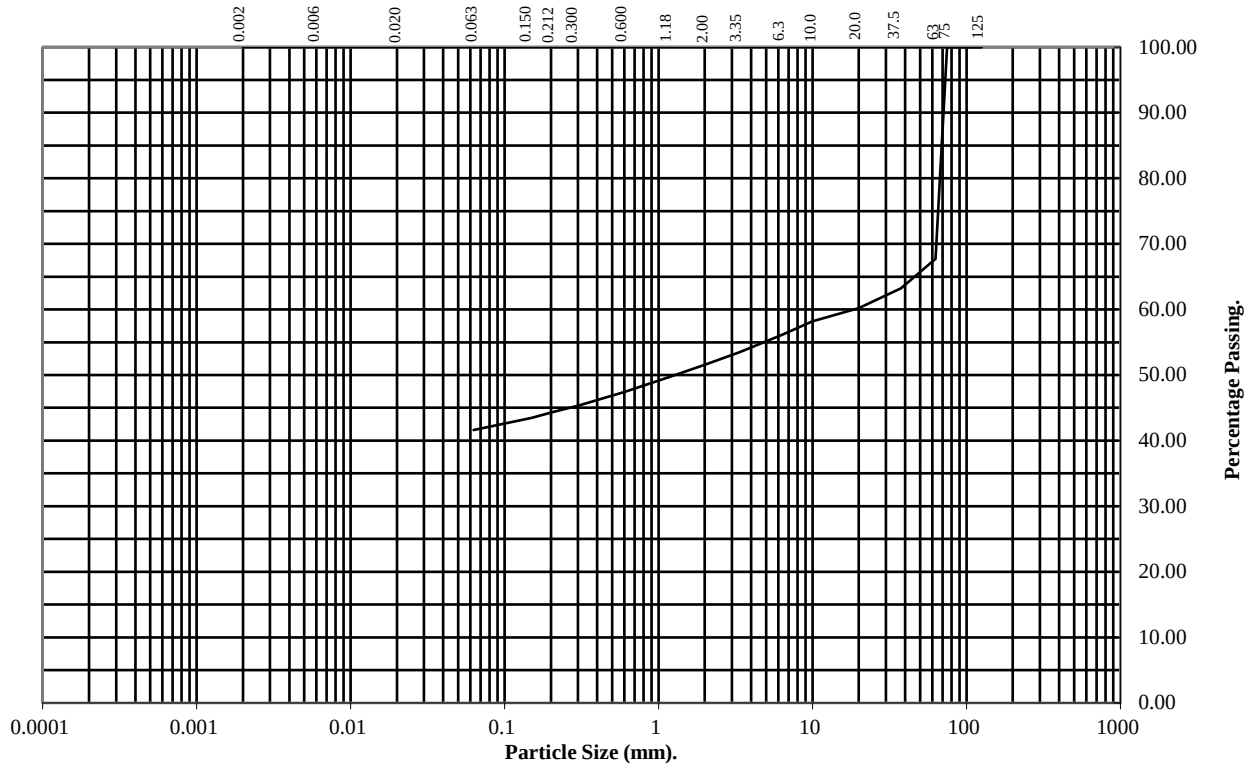Sample Type: B



BS Test Sieve	Percentage Passing
125	100
75	100
63	68
37.5	63
20	60
10	58
6.3	56
3.35	53
2	52
1.18	50
0.6	47
0.3	45
0.212	44
0.15	43
0.063	42

Soil Fraction	Total Percentage
Cobbles	32
Gravel	16
Sand	10
Silt/Clay	42

Remarks:

See summary of soil descriptions.



PSL
Professional Soils Laboratory

Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450

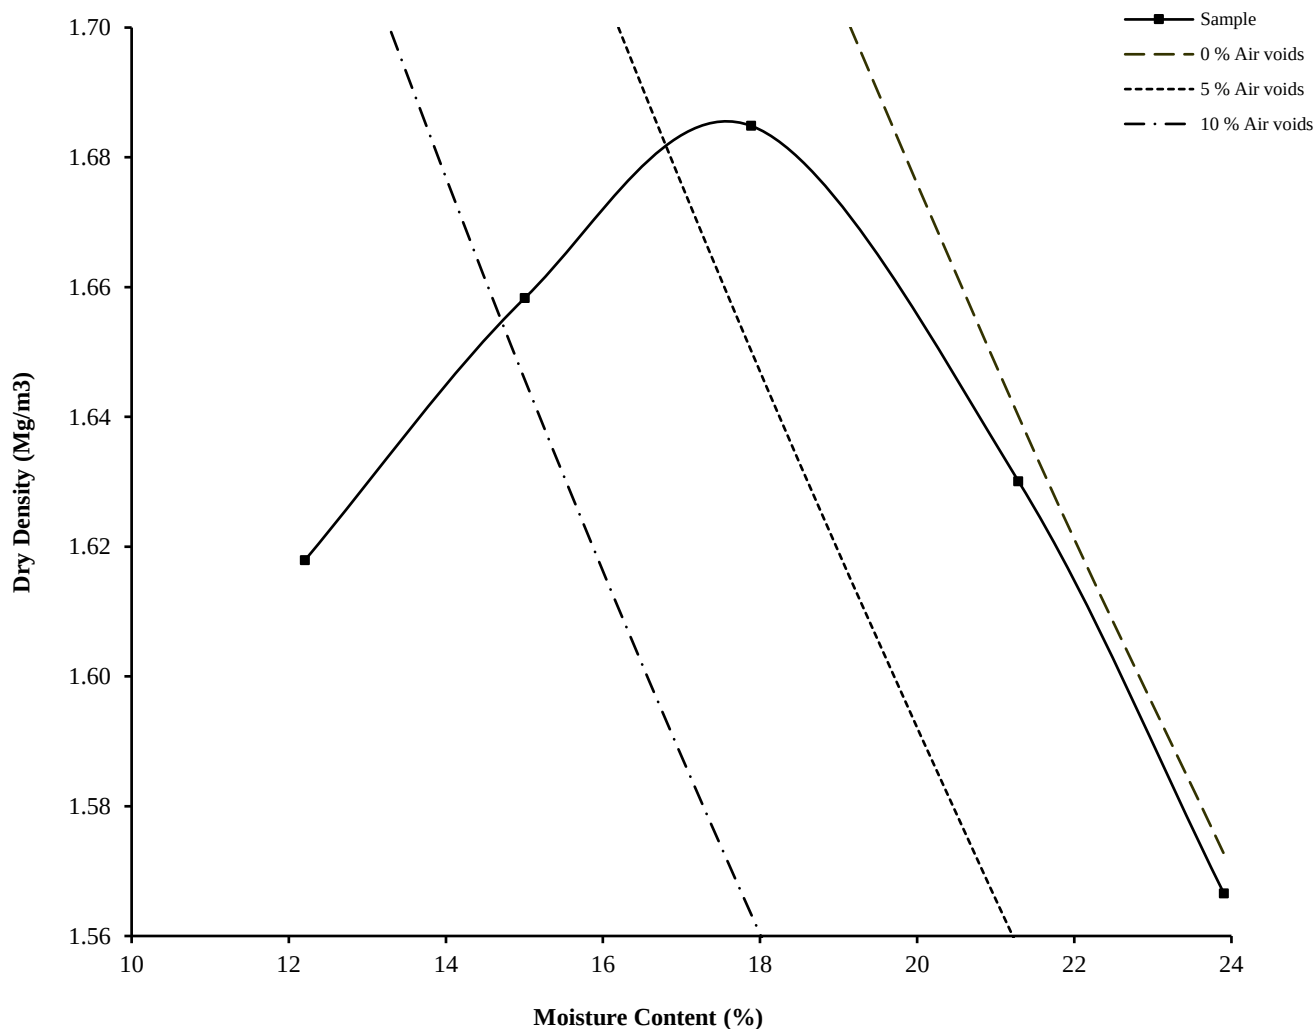
DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

Non compliance with BS 1377 : Part 4 : 1990

Hole Number: BH01 Top Depth (m) : 0.00

Sample Number: Base Depth (m) : 1.00

Sample Type: B



Initial Moisture Content:	21	Method of Compaction:	2.5kg	Separate Samples
Particle Density (Mg/m ³):	2.52	Actual	Material Retained on 37.5 mm Test Sieve (%):	37
Maximum Dry Density (Mg/m ³):	1.68		Material Retained on 20.0 mm Test Sieve (%):	3
Optimum Moisture Content (%):	18			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

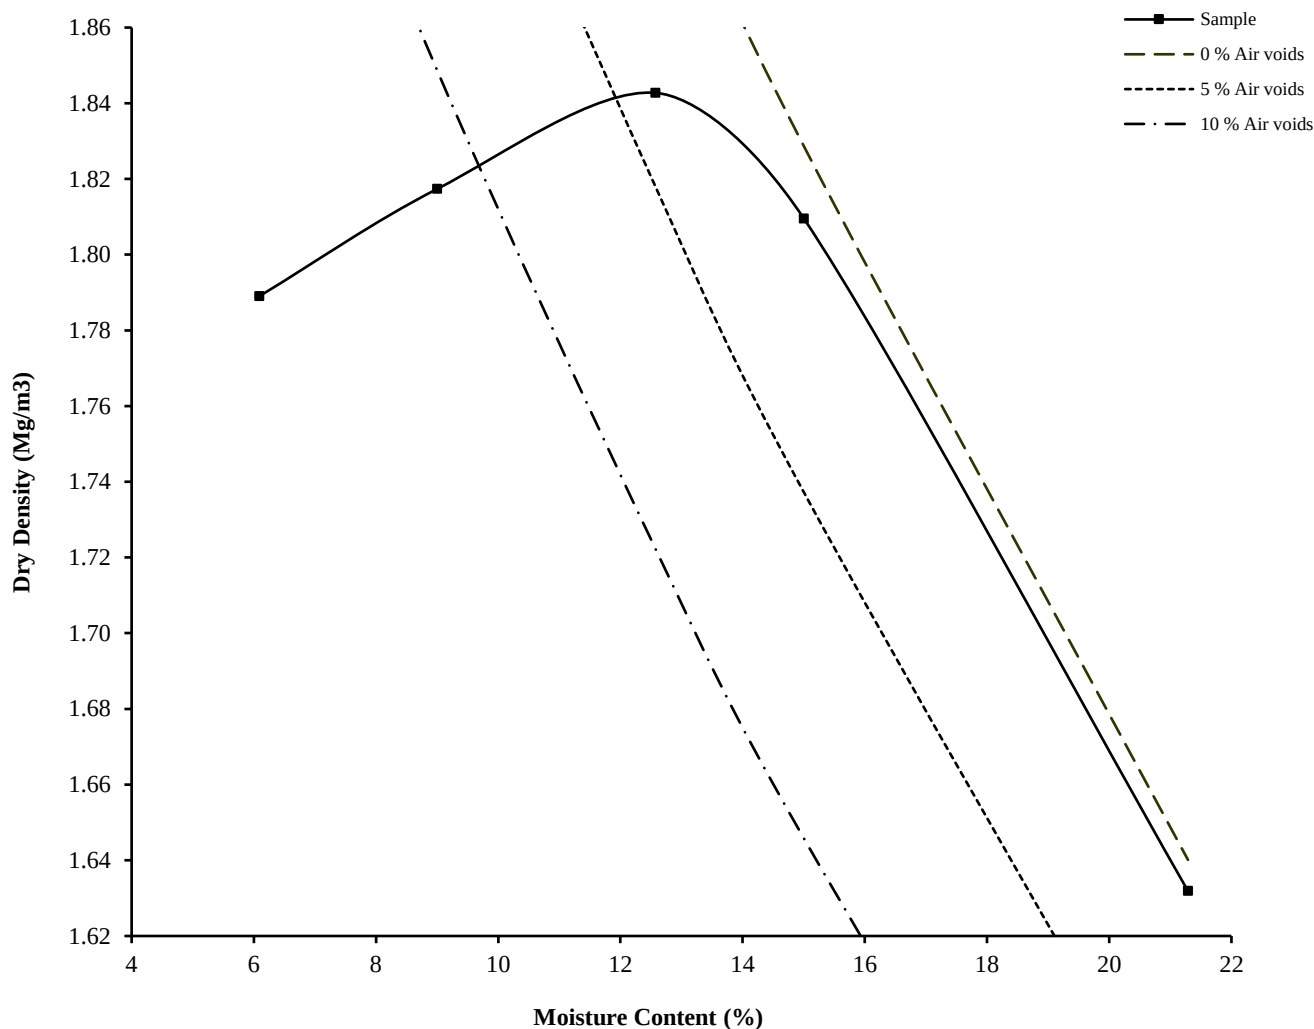
DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

Non compliance with BS 1377 : Part 4 : 1990

Hole Number: BH01 Top Depth (m) : 0.00

Sample Number: Base Depth (m) : 1.00

Sample Type: B



Initial Moisture Content:	21	Method of Compaction:	4.5kg	Separate Samples
Particle Density (Mg/m ³):	2.52	Actual	Material Retained on 37.5 mm Test Sieve (%):	37
Maximum Dry Density (Mg/m ³):	1.84		Material Retained on 20.0 mm Test Sieve (%):	3
Optimum Moisture Content (%):	13			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

CALIFORNIA BEARING RATIO TEST

Non compliance with BS 1377 : Part 4 : 1990

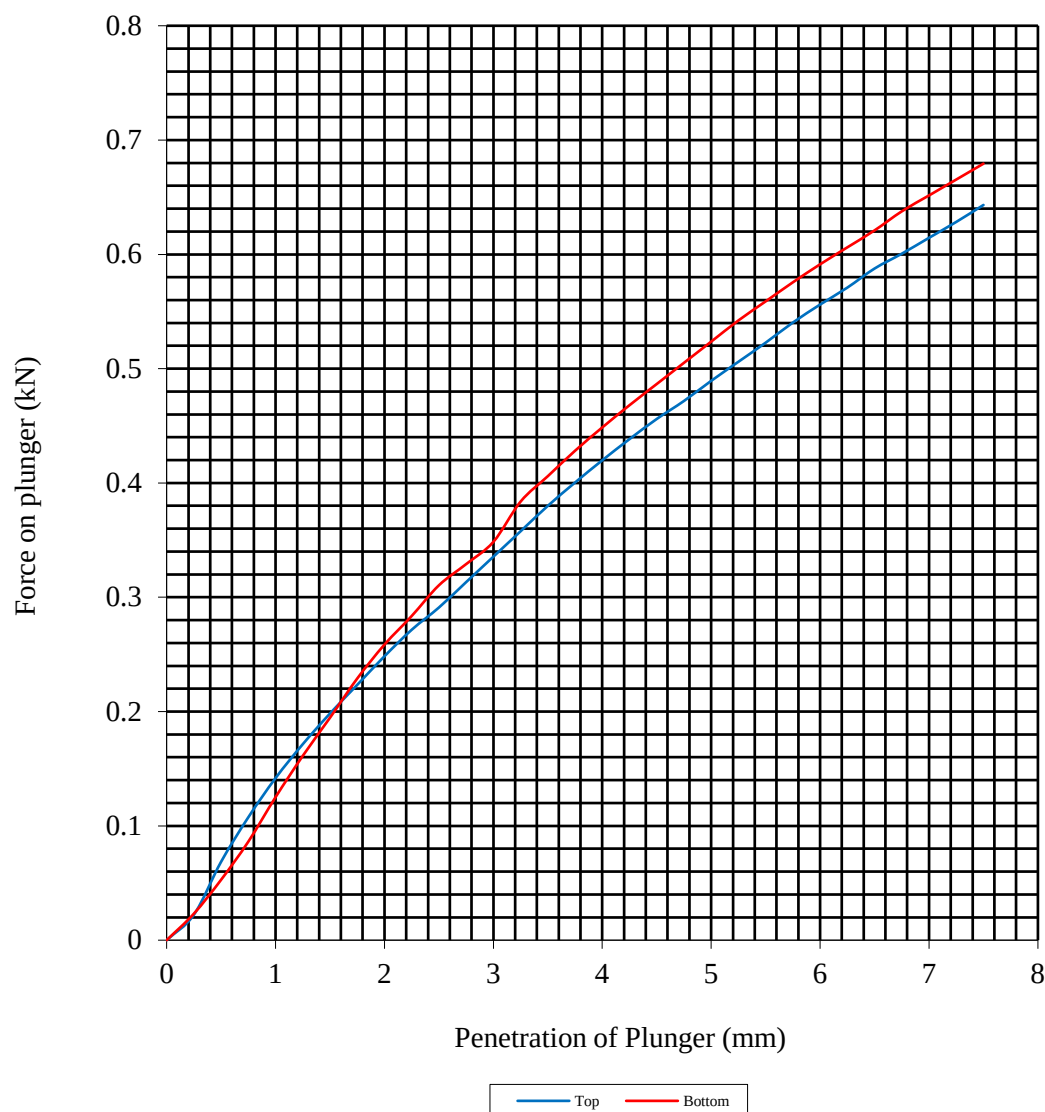
Hole Number: BH01

Top Depth (m): 0.00

Sample Number:

Base Depth (m): 1.00

Sample Type: B



Initial Sample Conditions		Sample Preparation		Final Moisture Content %		C.B.R. Value %	
Moisture Content:	21	Surcharge Kg:	14kg	Sample Top	21	Sample Top	2.4
Bulk Density Mg/m3:	1.98	Soaking Time hrs	0	Sample Bottom	21	Sample Bottom	2.6
Dry Density Mg/m3:	1.63	Swelling mm:	0	Remarks: See summary of soil descriptions.			
Percentage retained on 20mm BS test sieve:		40					
Compaction Conditions		2.5kg					



Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450

PARTICLE SIZE DISTRIBUTION TEST


BS1377 : Part 2 : 1990

Wet Sieve, Clause 9.2

Hole Number: TP12(SPB) Top Depth (m): 1.30

Sample Number: Base Depth(m): 1.80

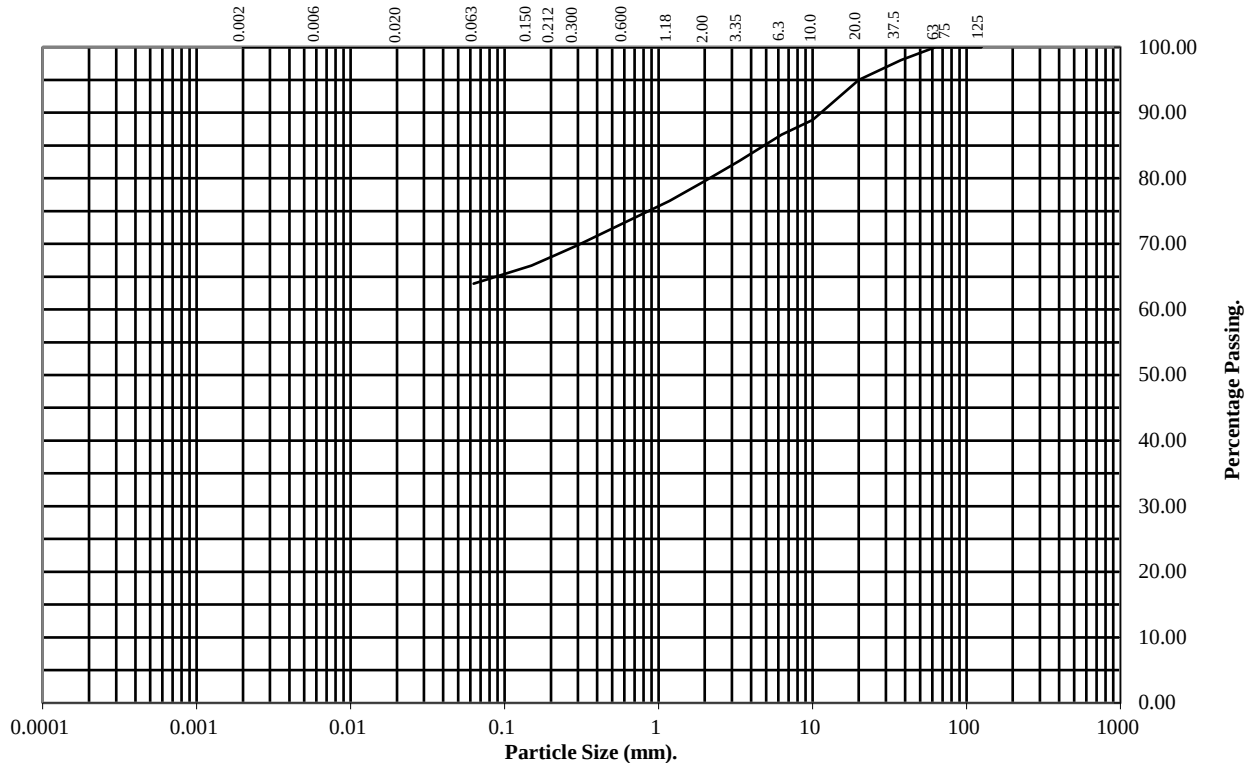Sample Type: B



BS Test Sieve	Percentage Passing
125	100
75	100
63	100
37.5	98
20	95
10	89
6.3	87
3.35	83
2	80
1.18	77
0.6	73
0.3	70
0.212	68
0.15	67
0.063	64

Soil Fraction	Total Percentage
Cobbles	0
Gravel	20
Sand	16
Silt/Clay	64

Remarks:

See summary of soil descriptions.



PSL
Professional Soils Laboratory

Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450


DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

BS 1377 : Part 4 : 1990

Hole Number: TP12(SPB) Top Depth (m) : 1.30

Sample Number: Base Depth (m) : 1.80

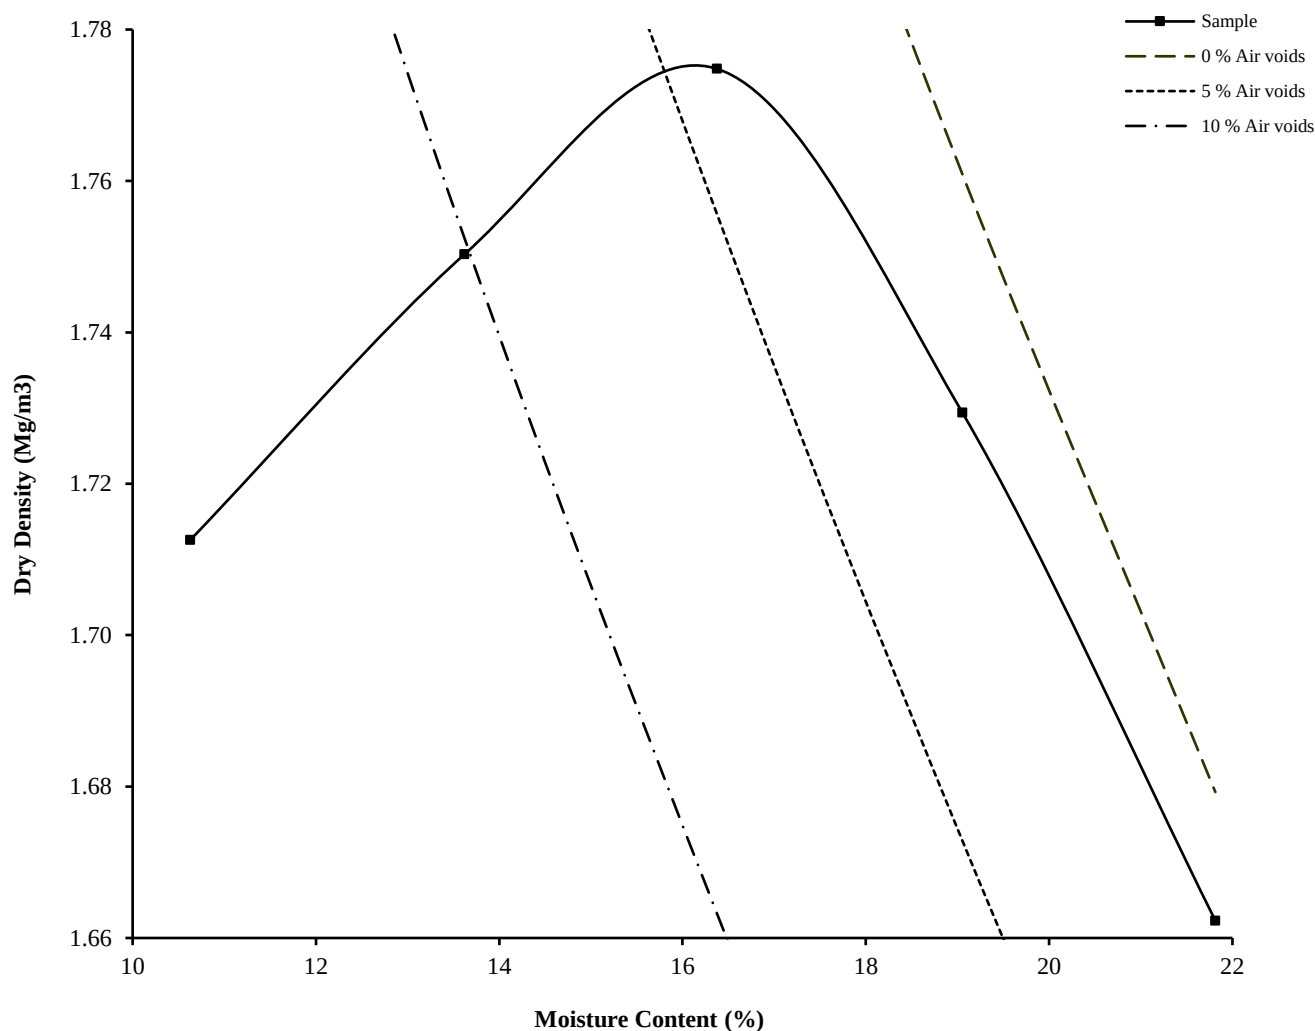Sample Type: B



Initial Moisture Content:	19	Method of Compaction:	2.5kg	Separate Samples
Particle Density (Mg/m ³):	2.65	Actual	Material Retained on 37.5 mm Test Sieve (%):	2
Maximum Dry Density (Mg/m ³):	1.77		Material Retained on 20.0 mm Test Sieve (%):	3
Optimum Moisture Content (%):	16			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450


DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

BS 1377 : Part 4 : 1990

Hole Number: TP12(SPB) Top Depth (m) : 1.30

Sample Number: Base Depth (m) : 1.80

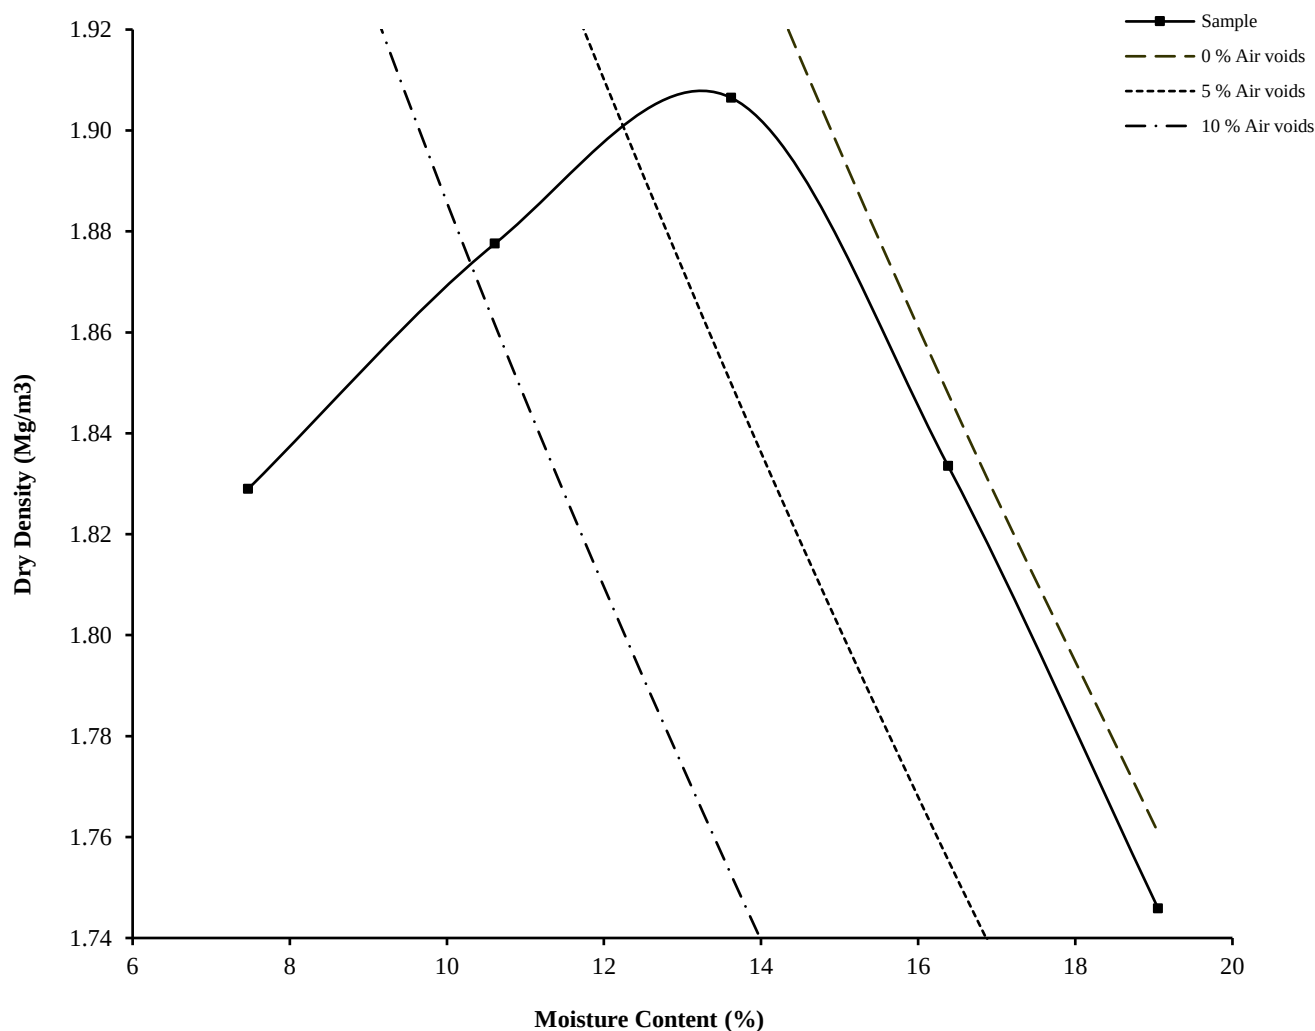Sample Type: B



Initial Moisture Content:	19	Method of Compaction:	4.5kg	Separate Samples
Particle Density (Mg/m ³):	2.65	Actual	Material Retained on 37.5 mm Test Sieve (%):	2
Maximum Dry Density (Mg/m ³):	1.91		Material Retained on 20.0 mm Test Sieve (%):	3
Optimum Moisture Content (%):	14			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

CALIFORNIA BEARING RATIO TEST

BS 1377 : Part 4 : 1990

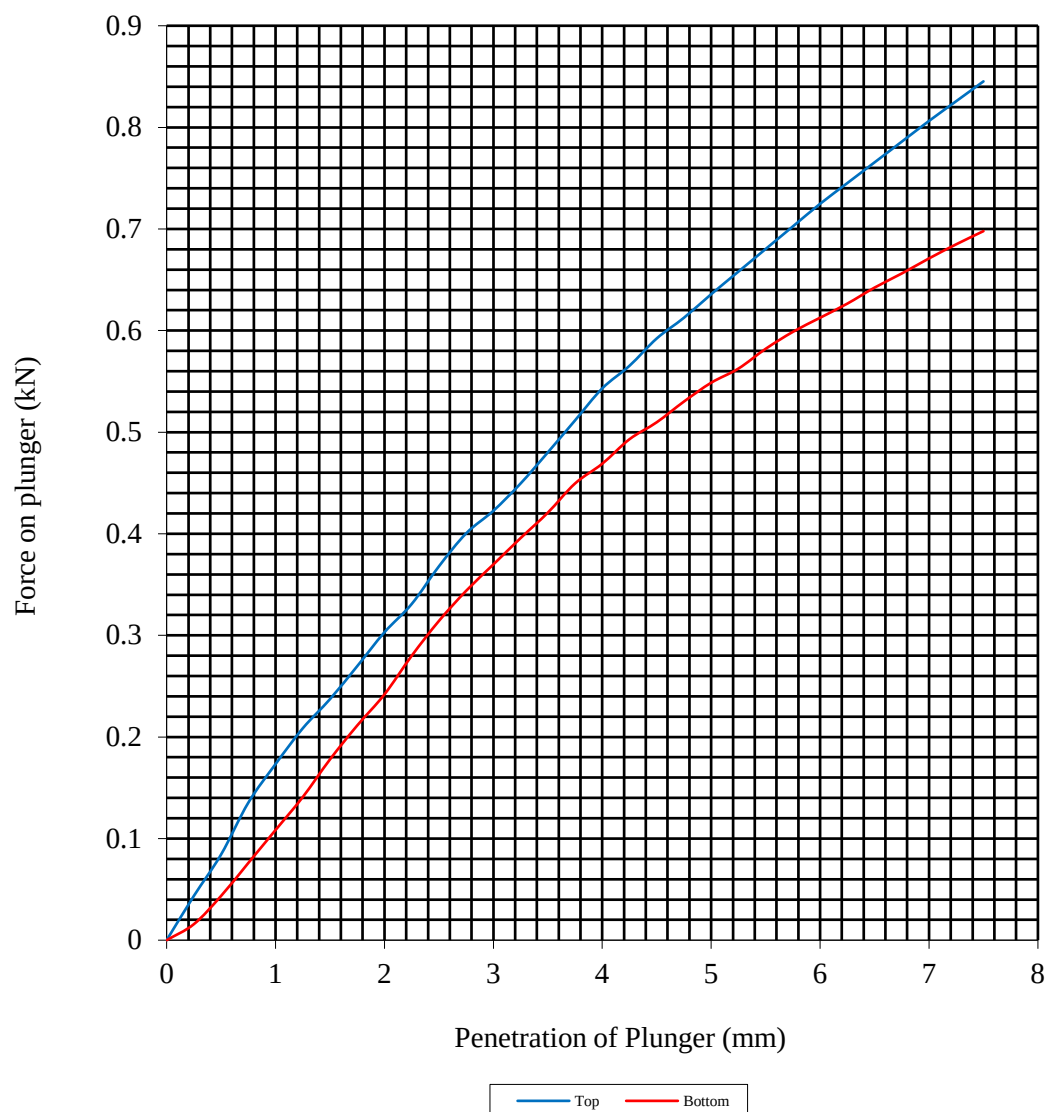
Hole Number: TP12(SPB)

Top Depth (m): 1.30

Sample Number:

Base Depth (m): 1.80

Sample Type: B



Initial Sample Conditions		Sample Preparation		Final Moisture Content %		C.B.R. Value %	
Moisture Content:	19	Surcharge Kg:	14kg	Sample Top	19	Sample Top	3.2
Bulk Density Mg/m3:	2.06	Soaking Time hrs	0	Sample Bottom	19	Sample Bottom	2.7
Dry Density Mg/m3:	1.73	Swelling mm:	0	Remarks: See summary of soil descriptions.			
Percentage retained on 20mm BS test sieve:		5					
Compaction Conditions		2.5kg					



Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450

PARTICLE SIZE DISTRIBUTION TEST


BS1377 : Part 2 : 1990

Wet Sieve, Clause 9.2

Hole Number: TP13 Top Depth (m): 0.50

Sample Number: Base Depth(m): 1.00

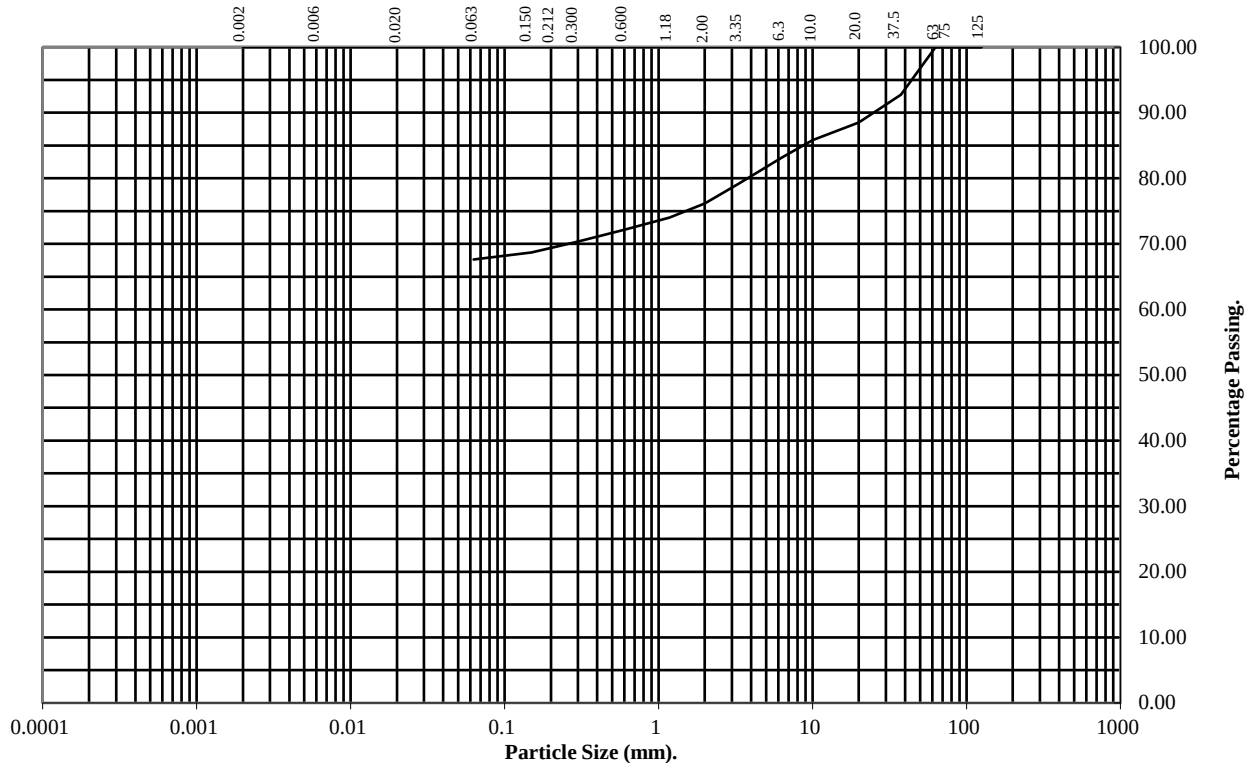Sample Type: B



BS Test Sieve	Percentage Passing
125	100
75	100
63	100
37.5	93
20	89
10	86
6.3	83
3.35	79
2	76
1.18	74
0.6	72
0.3	70
0.212	70
0.15	69
0.063	68

Soil Fraction	Total Percentage
Cobbles	0
Gravel	24
Sand	8
Silt/Clay	68

Remarks:

See summary of soil descriptions.



PSL
Professional Soils Laboratory

Capitol Park, Junction 37 (M1), Dodworth

Contract No:

PSL17/1324

Client Ref:

2450


DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

BS 1377 : Part 4 : 1990

Hole Number: TP13 Top Depth (m) : 0.50

Sample Number: Base Depth (m) : 1.00

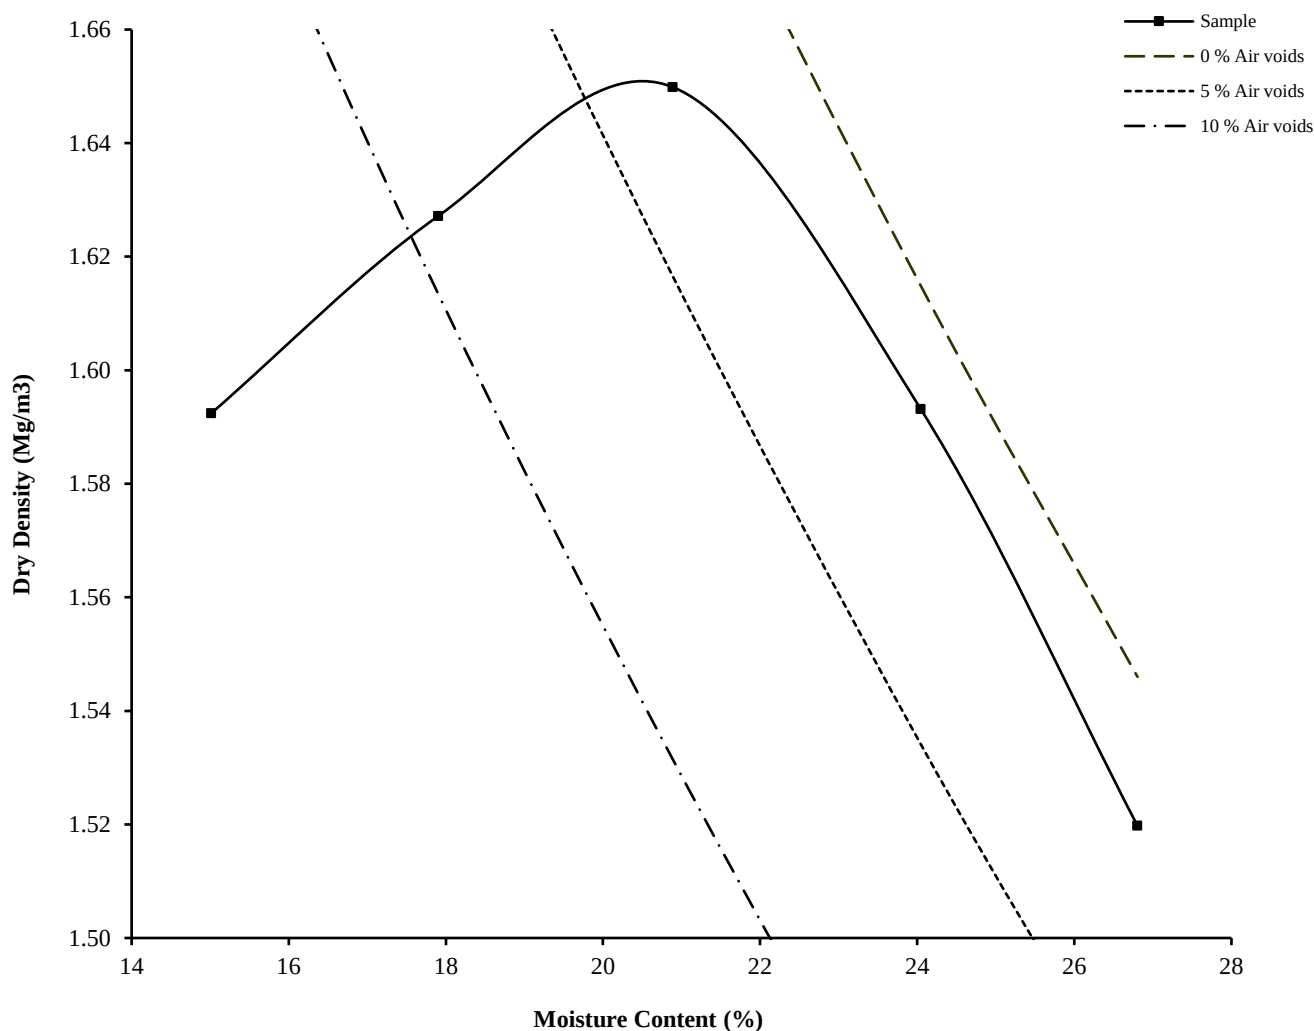Sample Type: B



Initial Moisture Content:	24	Method of Compaction:	2.5kg	Separate Samples
Particle Density (Mg/m ³):	2.64	Actual	Material Retained on 37.5 mm Test Sieve (%):	7
Maximum Dry Density (Mg/m ³):	1.65		Material Retained on 20.0 mm Test Sieve (%):	4
Optimum Moisture Content (%):	21			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450


DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

BS 1377 : Part 4 : 1990

Hole Number: TP13 Top Depth (m) : 0.50

Sample Number: Base Depth (m) : 1.00

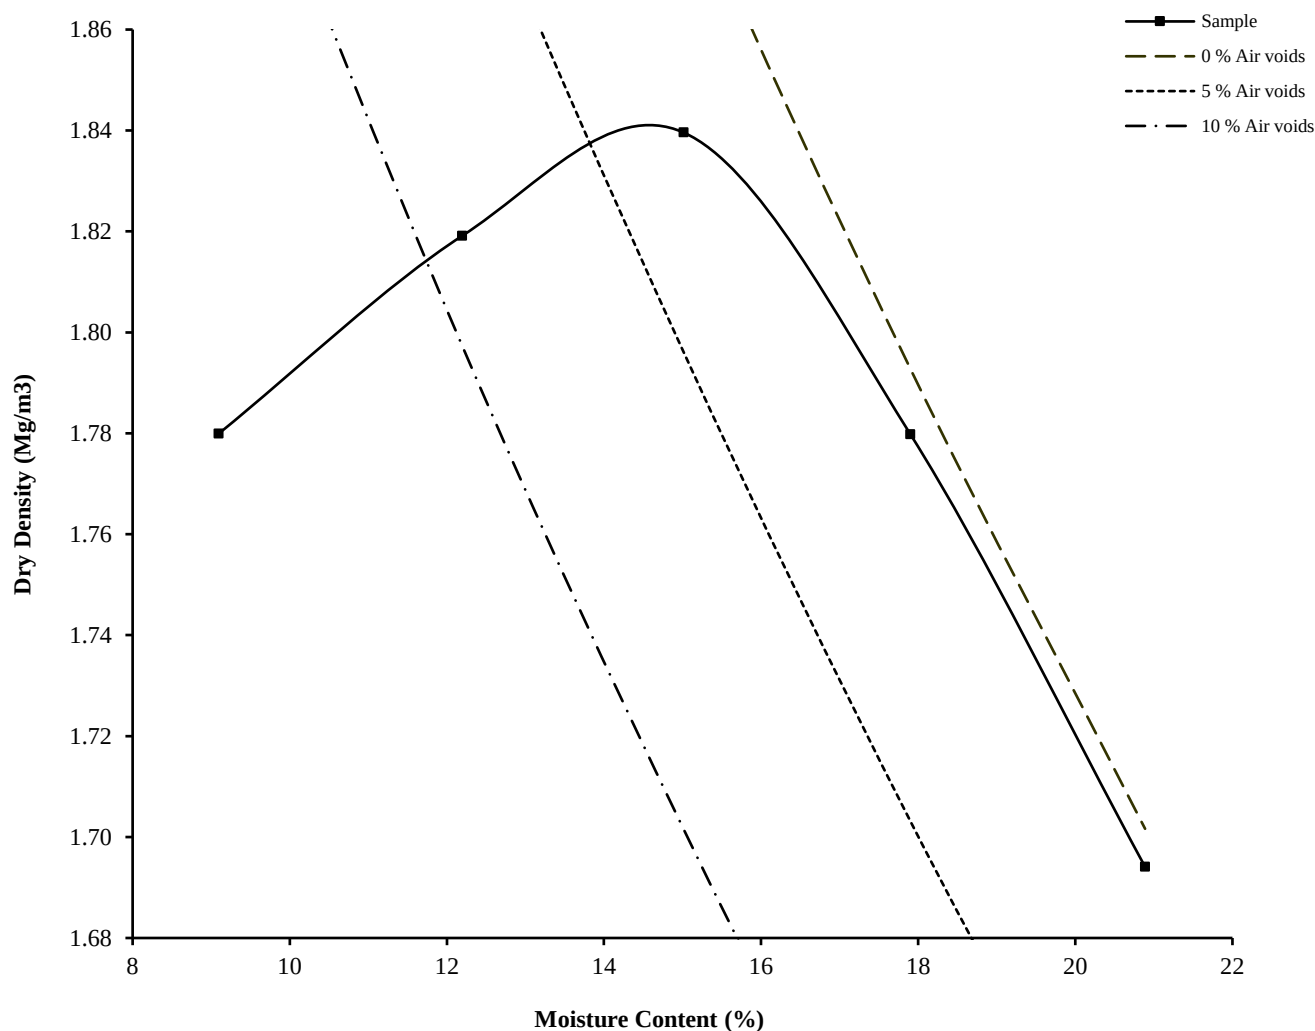Sample Type: B



Initial Moisture Content:	24	Method of Compaction:	4.5kg	Separate Samples
Particle Density (Mg/m ³):	2.64	Actual	Material Retained on 37.5 mm Test Sieve (%):	7
Maximum Dry Density (Mg/m ³):	1.84		Material Retained on 20.0 mm Test Sieve (%):	4
Optimum Moisture Content (%):	15			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

CALIFORNIA BEARING RATIO TEST

BS 1377 : Part 4 : 1990

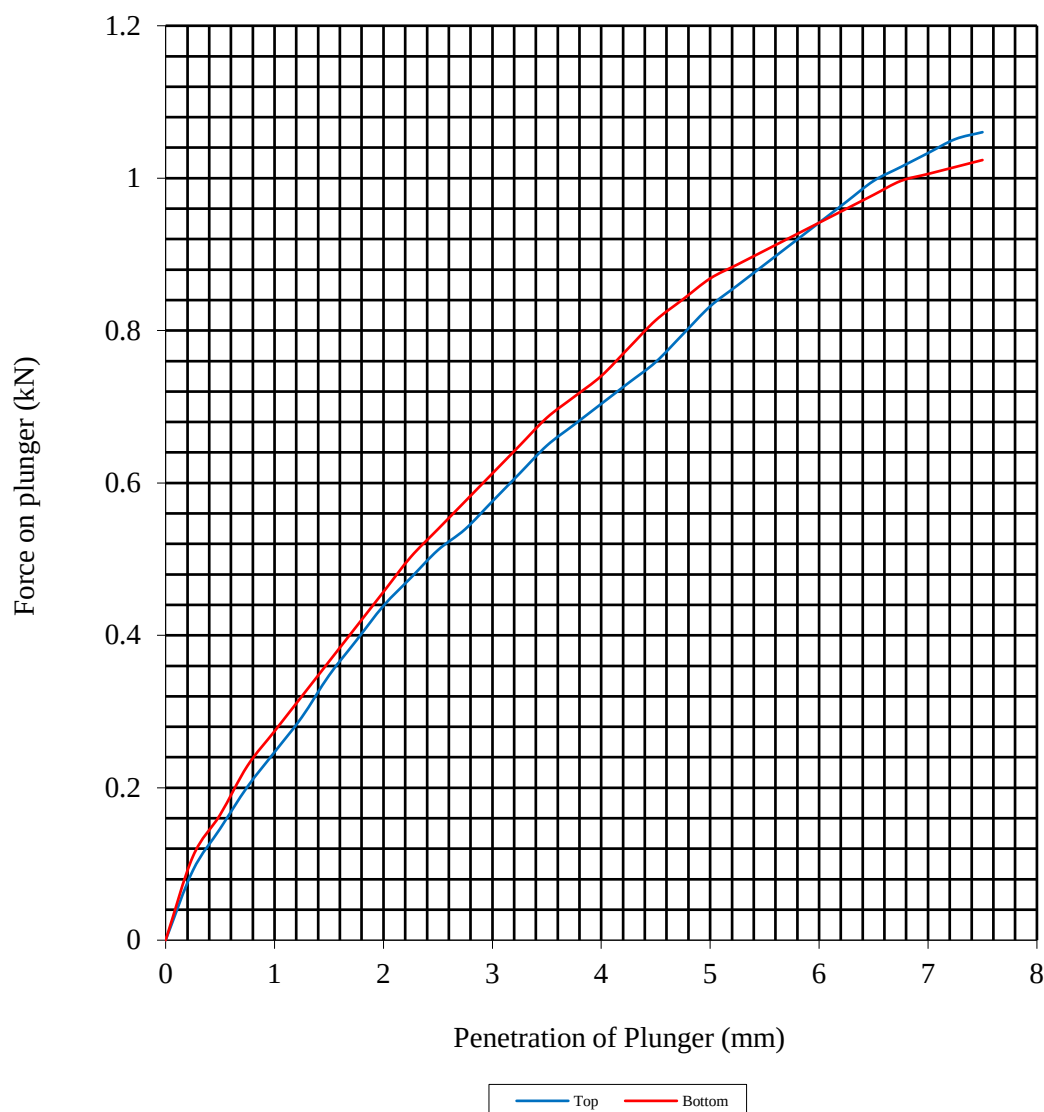
Hole Number: TP13

Top Depth (m): 0.50

Sample Number:

Base Depth (m): 1.00

Sample Type: B



Initial Sample Conditions		Sample Preparation		Final Moisture Content %		C.B.R. Value %	
Moisture Content:	24	Surcharge Kg:	14kg	Sample Top	24	Sample Top	4.2
Bulk Density Mg/m3:	1.97	Soaking Time hrs	0	Sample Bottom	24	Sample Bottom	4.3
Dry Density Mg/m3:	1.59	Swelling mm:	0	Remarks: See summary of soil descriptions.			
Percentage retained on 20mm BS test sieve:		11					
Compaction Conditions		2.5kg					



Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450

PARTICLE SIZE DISTRIBUTION TEST

BS1377 : Part 2 : 1990

Wet Sieve, Clause 9.2

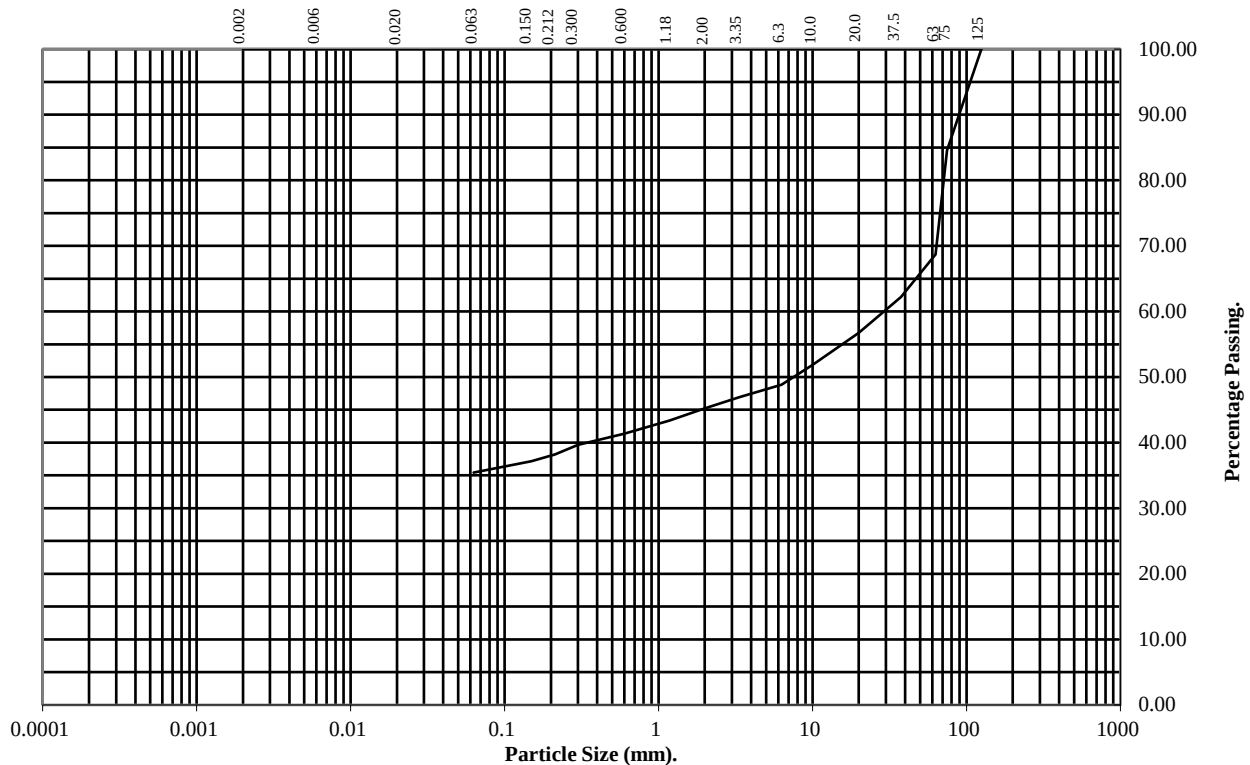
Hole Number: TP20(SPA)

Top Depth (m): 1.00

Sample Number:

Base Depth(m): 1.50

Sample Type: B



BS Test Sieve	Percentage Passing
125	100
75	85
63	69
37.5	62
20	57
10	52
6.3	49
3.35	47
2	45
1.18	43
0.6	41
0.3	40
0.212	38
0.15	37
0.063	35

Soil Fraction	Total Percentage
Cobbles	31
Gravel	24
Sand	10
Silt/Clay	35

Remarks:

See summary of soil descriptions.



PSL
Professional Soils Laboratory

Capitol Park, Junction 37 (M1), Dodworth

Contract No:

PSL17/1324

Client Ref:

2450

DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

Non compliance with BS 1377 : Part 4 : 1990

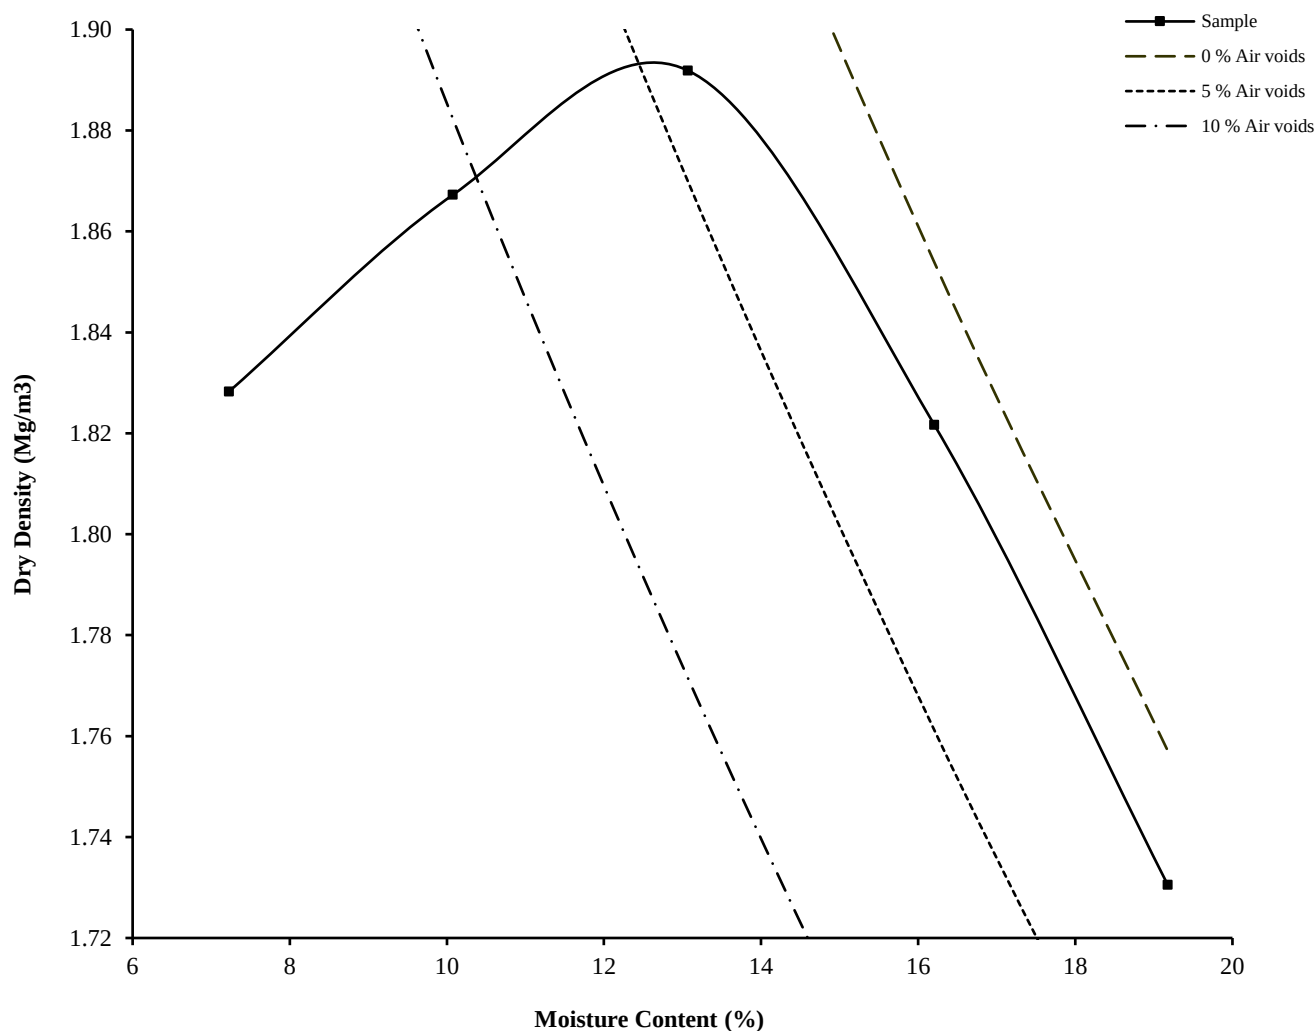
Hole Number: TP20(SPA)

Top Depth (m) : 1.00

Sample Number:

Base Depth (m) : 1.50

Sample Type: B



Initial Moisture Content:	13	Method of Compaction:	2.5kg	Separate Samples
Particle Density (Mg/m ³):	2.65	Actual	Material Retained on 37.5 mm Test Sieve (%):	38
Maximum Dry Density (Mg/m ³):	1.89		Material Retained on 20.0 mm Test Sieve (%):	5
Optimum Moisture Content (%):	13			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

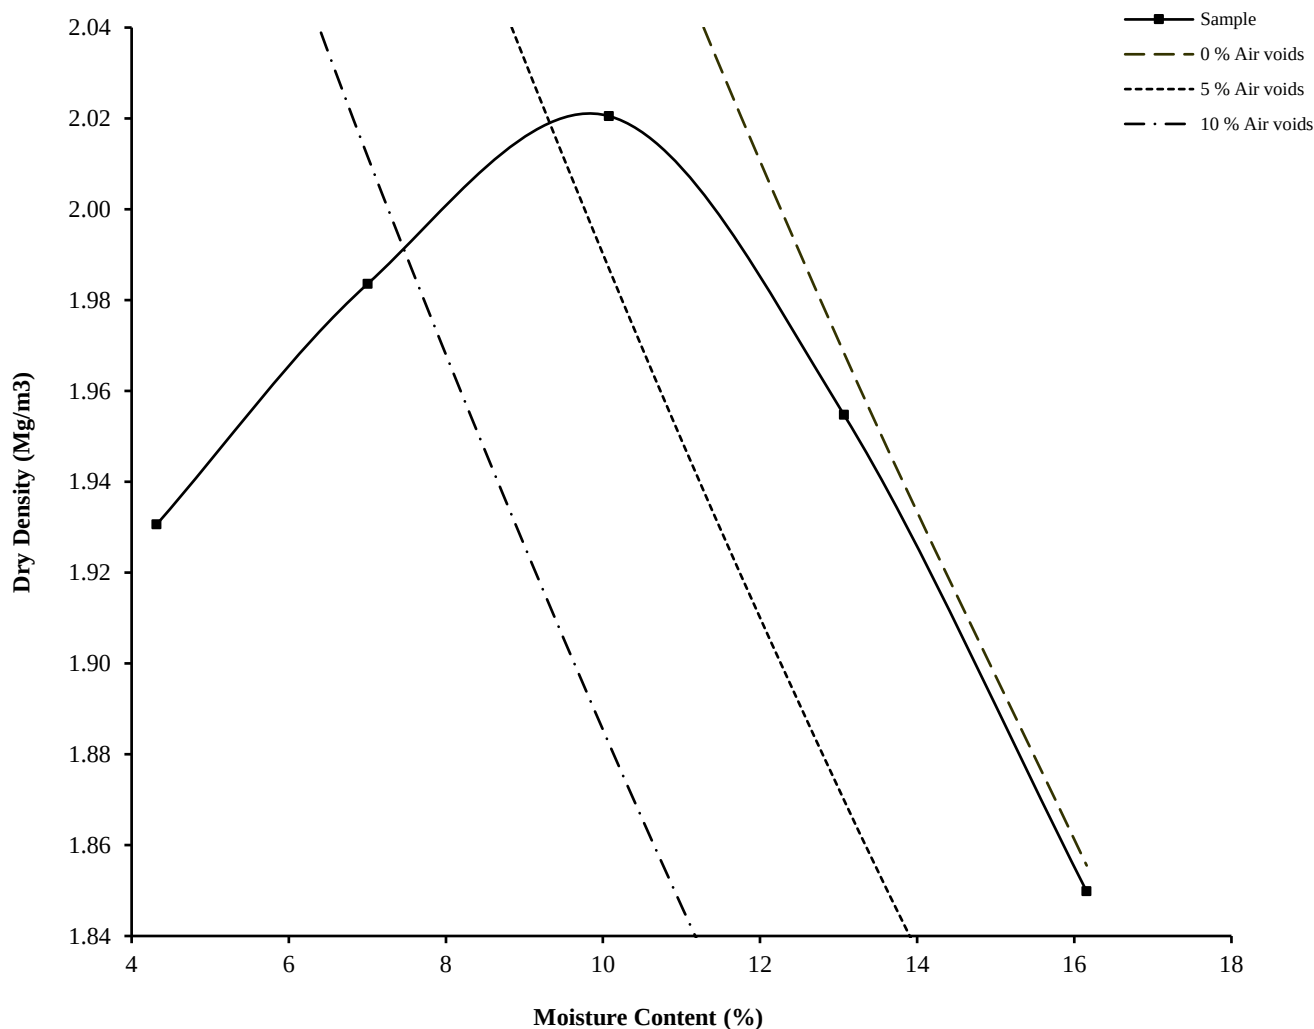
DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

Non compliance with BS 1377 : Part 4 : 1990

Hole Number: TP20(SPA) Top Depth (m) : 1.00

Sample Number: Base Depth (m) : 1.50

Sample Type: B



Initial Moisture Content:	13	Method of Compaction:	4.5kg	Separate Samples
Particle Density (Mg/m ³):	2.65	Actual	Material Retained on 37.5 mm Test Sieve (%):	38
Maximum Dry Density (Mg/m ³):	2.02		Material Retained on 20.0 mm Test Sieve (%):	5
Optimum Moisture Content (%):	10			
Remarks				
See summary of soil descriptions				

		Capitol Park, Junction 37 (M1), Dodworth	Contract
			PSL17/1324
			Client Ref
			2450

CALIFORNIA BEARING RATIO TEST

Non compliance with BS 1377 : Part 4 : 1990

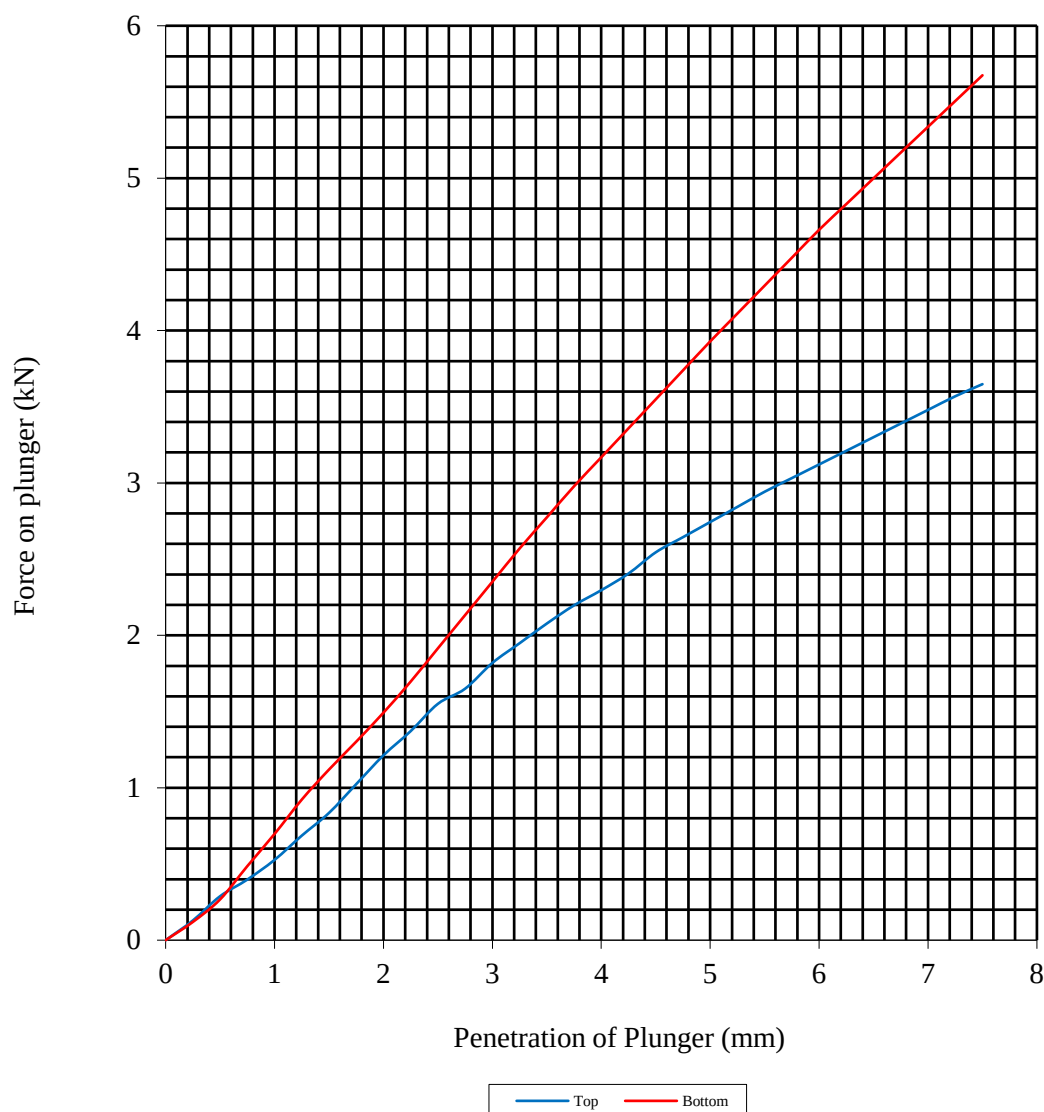
Hole Number: TP20(SPA)

Top Depth (m): 1.00

Sample Number:

Base Depth (m): 1.50

Sample Type: B



Initial Sample Conditions		Sample Preparation		Final Moisture Content %		C.B.R. Value %	
Moisture Content:	13	Surcharge Kg:	14kg	Sample Top	13	Sample Top	13.7
Bulk Density Mg/m3:	2.13	Soaking Time hrs	0	Sample Bottom	13	Sample Bottom	19.6
Dry Density Mg/m3:	1.89	Swelling mm:	0	Remarks: See summary of soil descriptions.			
Percentage retained on 20mm BS test sieve:		43					
Compaction Conditions		2.5kg					



Capitol Park, Junction 37 (M1), Dodworth

Contract No:
PSL17/1324
Client Ref:
2450



Certificate of Analysis

Certificate Number 17-95470

30-Mar-17

Client Professional Soils Laboratory Ltd
5/7 Hexthorpe Road
Hexthorpe
DN4 0AR

Our Reference 17-95470

Client Reference PSL17/1324

Order No (not supplied)

Contract Title Capitol Park, Junction 37 (M1) Dodworth

Description 12 Soil samples.

Date Received Saturday, March 25, 2017

Date Started Saturday, March 25, 2017

Date Completed Thursday, March 30, 2017

Test Procedures Identified by prefix DETSn (details on request).

Notes Opinions and interpretations are outside the scope of UKAS accreditation. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. Observations and interpretations are outside the scope of ISO 17025. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved By

Rob Brown
Business Manager



Summary of Chemical Analysis

Soil Samples

Our Ref 17-95470

Client Ref PSL17/1324

Contract Title Capitol Park, Junction 37 (M1) Dodworth

Lab No	1149812	1149813	1149814	1149815	1149816	1149817	1149818	1149819	1149820	1149821	1149822	1149823
Sample ID	TP02	TP03	TP04	TP08	TP11	TP14	TP15	TP19	BH01	TP12(SP	TP13	TP20(SP
Depth	0.20-0.50	0.10-0.20	0.00-0.50	0.20-0.40	2.10-2.60	1.10-1.50	0.30-0.80	2.50-2.60	0.00-1.00	1.30-1.80	0.50-1.00	1.00-1.50
Other ID												
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units												
Inorganics															
pH	DETSC 2008#			6.8	6.9	6.9	7.1	7.4	5.5	7.1	7.6	7.0	7.0	7.1	7.7
Chloride	DETSC 2055	1	mg/kg	3.4	< 1.0	5.1		36.1		2.5	8.5		10.7		2.4
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	15	11	24	31	31	82	40	43	< 10	94	41	13
Sulphur as S, Total	DETSC 2320	0.01	%	0.01	< 0.01	0.01		0.01		< 0.01	0.02		0.05		0.01
Sulphate as SO4, Total	DETSC 2321#	0.01	%	0.03	0.02	0.03		0.04		0.04	0.05		0.07		0.04

Information in Support of the Analytical Results

Our Ref 17-95470
 Client Ref PSL17/1324
 Contract Capitol Park, Junction 37 (M1) Dodworth

Containers Received & Deviating Samples

Lab No	Sample ID	Date Sampled	Containers Received	Holding time exceeded for tests	Inappropriate container for tests
1149812	TP02 0.20-0.50 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149813	TP03 0.10-0.20 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149814	TP04 0.00-0.50 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149815	TP08 0.20-0.40 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), pH + Conductivity (7 days)	
1149816	TP11 2.10-2.60 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149817	TP14 1.10-1.50 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), pH + Conductivity (7 days)	
1149818	TP15 0.30-0.80 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149819	TP19 2.50-2.60 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149820	BH01 0.00-1.00 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), pH + Conductivity (7 days)	
1149821	TP12(SPB) 1.30-1.80 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	
1149822	TP13 0.50-1.00 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), pH + Conductivity (7 days)	
1149823	TP20(SPA) 1.00-1.50 SOIL		PT 1L	Sample date not supplied, Anions 2:1 (365 days), Total Sulphur ICP (365 days), Total Sulphate ICP (730 days), Metals ICP Prep (365 days), pH + Conductivity (7 days)	

Key: P-Plastic T-Tub

DETS cannot be held responsible for the integrity of samples received whereby the laboratory did not undertake the sampling. In this instance samples received may be deviating. Deviating Sample criteria are based on British and International standards and laboratory trials in conjunction with the UKAS note 'Guidance on Deviating Samples'. All samples received are listed above. However, those samples that have additional comments in relation to hold time, inappropriate containers etc are deviating due to the reasons stated. This means that the analysis is accredited where applicable, but results may be compromised due to sample deviations. If no sampled date (soils) or date+time (waters) has been supplied then samples are deviating. However, if you are able to supply a sampled date (and time for waters) this will prevent samples being reported as deviating where specific hold times are not exceeded and where the container supplied is suitable.

Information in Support of the Analytical Results

Our Ref 17-95470
Client Ref PSL17/1324
Contract Capitol Park, Junction 37 (M1) Dodworth

Soil Analysis Notes

Inorganic soil analysis was carried out on a dried sample, crushed to pass a 425µm sieve, in accordance with BS1377.
Organic soil analysis was carried out on an 'as received' sample. Organics results are corrected for moisture and expressed on a dry weight basis.
The Loss on Drying, used to express organics analysis on an air dried basis, is carried out at a temperature of 28°C +/-2°C.

Disposal

From the issue date of this test certificate, samples will be held for the following times prior to disposal :-
Soils - 1 month, Liquids - 2 weeks, Asbestos (test portion) - 6 months



Appendix E Gas and Groundwater Monitoring Results

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 1

Client: Commercial Development Projects Limited

Date: 20/03/2017



Monitoring Location	Gas Concentration							Gas Emission Rate		GWL	Base of Standpipe	
	Peak		Steady		Highest	Lowest						
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litre/Hour			
BH	% lcl	%v/v	%	% lcl	%v/v	%	ppm	%	Peak	Steady	(m) bgl	
RO01	0.0	0.0	4.7	0.0	0.0	1.1	1	7.2	0.0	0.0	13.54	30.70
BH03	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
BH05	1.2	0.0	3.4	0.0	0.0	3.4	1	17.4	0.0	0.0	DRY	5.08
Ambient Concentration (% volume):				CH ₄	0.0	%v/v	CO ₂		0.0	%v/v		
				O ₂	20.9	%v/v						
Barometric Pressure:		Start	NR					Monitoring Equipment:		Gas Data GFM 430		
		End	NR					Serial Number of Equipment:		10301		
Barometric Pressure Trend:			Falling					Date of Last Calibration:		21/07/2016		
Weather:			NR					Operator:		AN		
Key		Remarks										
NR - Not Recorded NA - Not Applicable												
		Checked:					Approved:					

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 2

Client: Commercial Development Projects Limited

Date: 28/03/2017



Monitoring Location	Gas Concentration								Gas Emission Rate		GWL	Base of Standpipe
	Peak			Steady		Highest	Lowest					
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litre/Hour			
BH	% lcl	%v/v	%	% lcl	%v/v	%	ppm	%	Peak	Steady	(m) bgl	
RO01	0.0	0.0	4.5	0.0	0.0	1.1	0	15.4	0.0	0.0	13.67	30.70
BH03	0.0	0.0	1.0	0.0	0.0	1.0	0	13.7	2.5	0.0	1.94	2.02
BH05	0.0	0.0	4.4	0.0	0.0	4.4	0	15.3	0.0	0.0	Dry	5.08
Ambient Concentration (% volume):												
			CH ₄	0.0	%v/v	CO ₂			0.0	%v/v		
			O ₂	21.0	%v/v							
Barometric Pressure:		Start	999					Monitoring Equipment:		Gas Data GFM 430		
		End	997					Serial Number of Equipment:		10301		
Barometric Pressure Trend:		Falling						Date of Last Calibration:		21/07/2016		
Weather:		Sunny						Operator:		JP		
Key			Remarks									
NR - Not Recorded NA - Not Applicable												
			Checked:					Approved:				

GAS AND GROUNDWATER MONITORING RESULTS

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 3

Client: Commercial Development Projects Limited

Date: 05/04/2017



Monitoring Location	Gas Concentration								Gas Emission Rate		GWL	Base of Standpipe
	Peak			Steady			Highest	Lowest				
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litres/Hour			
BH	% lsl	%v/v	%	% lsl	%v/v	%	ppm	%	Peak	Steady	(m) bgl	
RO01	0.0	0.0	0.0	0.0	0.0	0.0	0	20.9	-3.7	-3.7	15.63	30.70
BH03	0.0	0.0	1.3	0.0	0.0	1.3	1	11.6	0.7	0.0	Dry	2.02
BH05	0.0	0.0	5.5	0.0	0.0	5.5	0	13.4	0.0	0.0	Dry	5.08
Ambient Concentration (% volume): CH₄ 0.0 %v/v CO₂ 0.0 %v/v O₂ 20.9 %v/v												
Barometric Pressure:		Start	1012	Monitoring Equipment:				Gas Data GFM 430				
		End	1009	Serial Number of Equipment:				10301				
Barometric Pressure Trend:		Rising		Date of Last Calibration:				21/07/2016				
Weather:		Sunny spells		Operator:				JP				
Key		Remarks										
NR - Not Recorded NA - Not Applicable												
		Checked:				Approved:						

GAS AND GROUNDWATER MONITORING RESULTS

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 4

Client: Commercial Development Projects Limited

Date: 12/04/2017



Monitoring Location	Gas Concentration							Gas Emission Rate		GWL	Base of Standpipe
	Peak		Steady		Highest	Lowest					
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litre/Hour		
BH	% lsl	%v/v	%	% lsl	%v/v	%	ppm	%	Peak	Steady	(m) bgl
RO01	0.0	0.0	7.0	0.0	0.0	7.0	0	1.4	6.1	6.0	15.62
BH03	0.0	0.0	1.7	0.0	0.0	1.7	1	2.5	2.5	0.0	DRY
BH05	0.0	0.0	6.2	0.0	0.0	6.2	1	13.1	0.0	0.0	Dry
Ambient Concentration (% volume):											
			CH ₄	0.0	%v/v				CO ₂	0.0	%v/v
			O ₂	21	%v/v						
Barometric Pressure:		Start	997	Monitoring Equipment:				Gas Data GFM 430			
		End	994	Serial Number of Equipment:				10301			
Barometric Pressure Trend:		Falling		Date of Last Calibration:				21/07/2016			
Weather:		Overcast and dry		Operator:				APN			
Key		Remarks									
NR - Not Recorded NA - Not Applicable											
		Checked:				Approved:					

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 5

Client: Commercial Development Projects Limited

Date: 20/04/2017



Monitoring Location	Gas Concentration							Gas Emission Rate		GWL	Base of Standpipe	
	Peak			Steady		Highest	Lowest					
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litre/Hour			
BH	% lcl	%v/v	%	% lcl	%v/v	%	ppm	%	Peak	Steady	(m) bgl	
RO01	0.0	0.0	0.0	0.0	0.0	0.0	0	20.9	4.8	3.8	16.38	30.70
BH03	0.0	0.0	1.9	0.0	0.0	1.9	0	9.8	2.1	0.0	Dry	2.02
BH05	0.0	0.0	6.3	0.0	0.0	6.3	0	13.3	0.0	0.0	Dry	5.08
Ambient Concentration (% volume):												
			CH ₄	0.0	%v/v	CO ₂			0.0	%v/v		
			O ₂	20.1	%v/v							
Barometric Pressure:		Start	1013					Monitoring Equipment:		Gas Data GFM 430		
		End	NR					Serial Number of Equipment:		10301		
Barometric Pressure Trend:			Rising					Date of Last Calibration:		21/07/2016		
Weather:			Sunny spells and breezy					Operator:		JP		
Key			Remarks									
NR - Not Recorded NA - Not Applicable												
			Checked:					Approved:				

Site: Junction 37, Barnsley

Job No: 2450

Visit No: 6

Client: Commercial Development Projects Limited

Date: 25/04/2017



Monitoring Location	Gas Concentration							Gas Emission Rate		GWL	Base of Standpipe	
	Peak		Steady		Highest	Lowest						
	CH ₄		CO ₂	CH ₄		CO ₂	H ₂ S	O ₂	Litre/Hour			
BH	% lcl	%v/v	%	% lcl	%v/v	%	ppm	%	Peak	Steady	(m) bgl	
RO01	0.0	0.0	0.5	0.0	0.0	0.5	1	20.2	-2.6	-1.1	16.49	30.70
BH03	0.0	0.0	2.4	0.0	0.0	2.4	0	9.4	0.0	0.0	Dry	2.02
BH05	0.0	0.0	7.9	0.0	0.0	7.9	0	12.9	0.0	0.0	Dry	5.08
Ambient Concentration (% volume):				CH ₄	0.0		CO ₂	0.0	%v/v			
				O ₂	20.9							
Barometric Pressure:		Start	997	Monitoring Equipment:				Gas Data GFM 430				
		End	995	Serial Number of Equipment:				10301				
Barometric Pressure Trend:		Falling			Date of Last Calibration:				21/07/2016			
Weather:		Sunny spells and breezy				Operator:				JP		
Key		Remarks										
NR - Not Recorded NA - Not Applicable												
		Checked:					Approved:					

SUMMARY OF GROUND GAS MONITORING

BH NO.	Peak CH4 (% v/v) MIN	Peak CH4 (% v/v) MAX	Steady CH4 (% v/v) MIN	Steady CH4 (% v/v) MAX	Peak CO2 (% v/v) MIN	Peak CO2 (% v/v) MAX	Steady CO2 (% v/v) MIN	Steady CO2 (% v/v) MAX	O2 (% v/v) MIN	O2 (% v/v) MAX	max limiting bh flow rate for CH4	max limiting bh flow rate for CO2*	Peak Flow (l/hr) MAX	Steady Flow (l/hr) MAX	SWL (m bgl) MIN	SWL (m bgl) MAX
RO01	0	0	0	0	0	7	0	7	1.4	20.9	0	0.42	6.1	6	13.54	16.49
BH03	0	0	0	0	1	2.4	1	2.4	2.5	13.7	0	0	2.5	0	1.94	1.94
BH05	0	0	0	0	3.4	7.9	3.4	7.9	12.9	17.4	0	0	0	0	0.00	0.00

* Based on peak CO2 and steady flows.

	VISIT 1	VISIT 2	VISIT 3	VISIT 4	VISIT 5	VISIT 6
MB Start	NR	999	1012	997	1013	997
MB Finish	NR	997	1009	994	NR	995
Pressure Change	Falling	Falling	Rising	Falling	Rising	Falling



Appendix F Notes on Limitations



General

JPG (Leeds) Limited have prepared this report solely for the use of the Client and those parties with whom a warranty agreement has been executed, or with whom an assignment has been agreed. Should any third party wish to use or rely upon the contents of the report, written approval must be sought from JPG (Leeds) Limited; a charge may be levied against such approval.

JPG (Leeds) Limited accepts no responsibility or liability for:

- a) the consequences of this document being used for any purpose or project other than for which it was commissioned, and
- b) this document to any third party with whom an agreement has not been executed.

Phase I Desk Study Reports

The work undertaken to provide the basis of this report comprised a study of available documented information from a variety of sources (including the Client), together with (where appropriate) a brief walk over inspection of the site and meetings and discussions with relevant authorities and other interested parties. The opinions given in this report have been dictated by the finite data on which they are based and are relevant only to the purpose for which the report was commissioned. The information reviewed should not be considered exhaustive and has been accepted in good faith as providing true and representative data pertaining to site conditions. Should additional information become available which may affect the opinions expressed in this report, JPG (Leeds) Limited reserves the right to review such information and, if warranted, to modify the opinions accordingly.

It should be noted that any risks identified in this report are perceived risks based on the information reviewed; actual risks can only be assessed following a physical investigation of the site.

Phase II Geo-Environmental Investigations

The investigation of the site has been carried out to provide sufficient information concerning the type and degree of contamination, geotechnical characteristics and ground and groundwater conditions to allow a reasonable assessment of the environmental risks together with engineering and development implications. The objectives of the investigation have been limited to establishing the risks associated with potential human targets, building materials, the environment (including adjacent land), and to surface and groundwater.

The amount of exploratory work and chemical testing undertaken has necessarily been restricted by the short timescale available, and the locations of exploratory holes have been restricted to the areas unoccupied by the building(s) on the site and by buried services. A more comprehensive investigation may be required if the site is to be redeveloped as, in addition to risk assessment, a number of important engineering and environmental issues may need to be resolved.

For these reasons if costs have been included in relation to site remediation these must be considered as tentative only and must, in any event, be confirmed by a qualified quantity surveyor.

The exploratory holes undertaken, which investigate only a small volume of the ground in relation to the size of the site, can only provide a general indication of site conditions. The opinions provided and recommendations given in this report are based on the ground conditions apparent at the site of each of the exploratory holes. There may be exceptional ground conditions elsewhere on the site which have not been disclosed by this investigation and which have therefore not been taken into account in this report.

The comments made on groundwater conditions are based on observations made at the time that site work was carried out. It should be noted that groundwater levels will vary owing to seasonal, tidal and weather related effects.



The number of sampling points and the methods of sampling and testing do not preclude the existence of localised "hotspots" of contamination where concentrations may be significantly higher than those actually encountered.

The risk assessment and opinions provided, inter alia, take in to consideration currently available guidance values relating to acceptable contamination concentrations; no liability can be accepted for the retrospective effects of any future changes or amendments to these values.

The scope of the investigation was selected on the basis of the specific development proposed by the Client and may be inappropriate to another form of development or scheme.

5 John Charles Way
LEEDS
LS12 6QA

Tel: 0113 263 1155
Fax: 0113 263 0405
admin@jpg.group
www.jpg.group

