



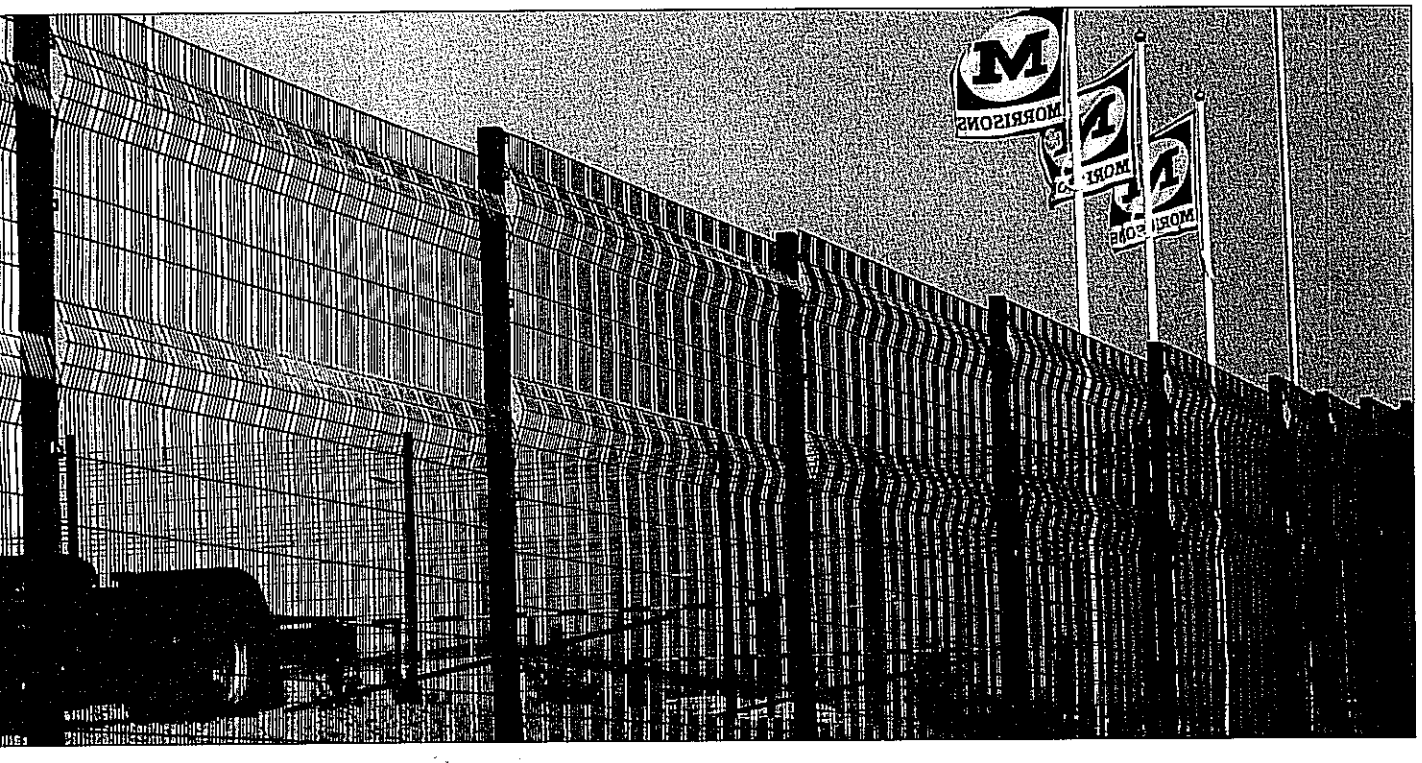

Posts: 60x60mm RHS set at 3M nominal centres.
Wire: Horizontals 6mm diameter set at 150mm maximum centres.
Verticals 4mm diameter set at 40mm and 22mm centres.
Profiles: 3 per panel.
Fixings: Tamper proof fixings comprising steel clamp with recessed face and permacone security fixings.
Finish: Galvanised wire & Polyester Powder Coated.

Post Fixing Detail

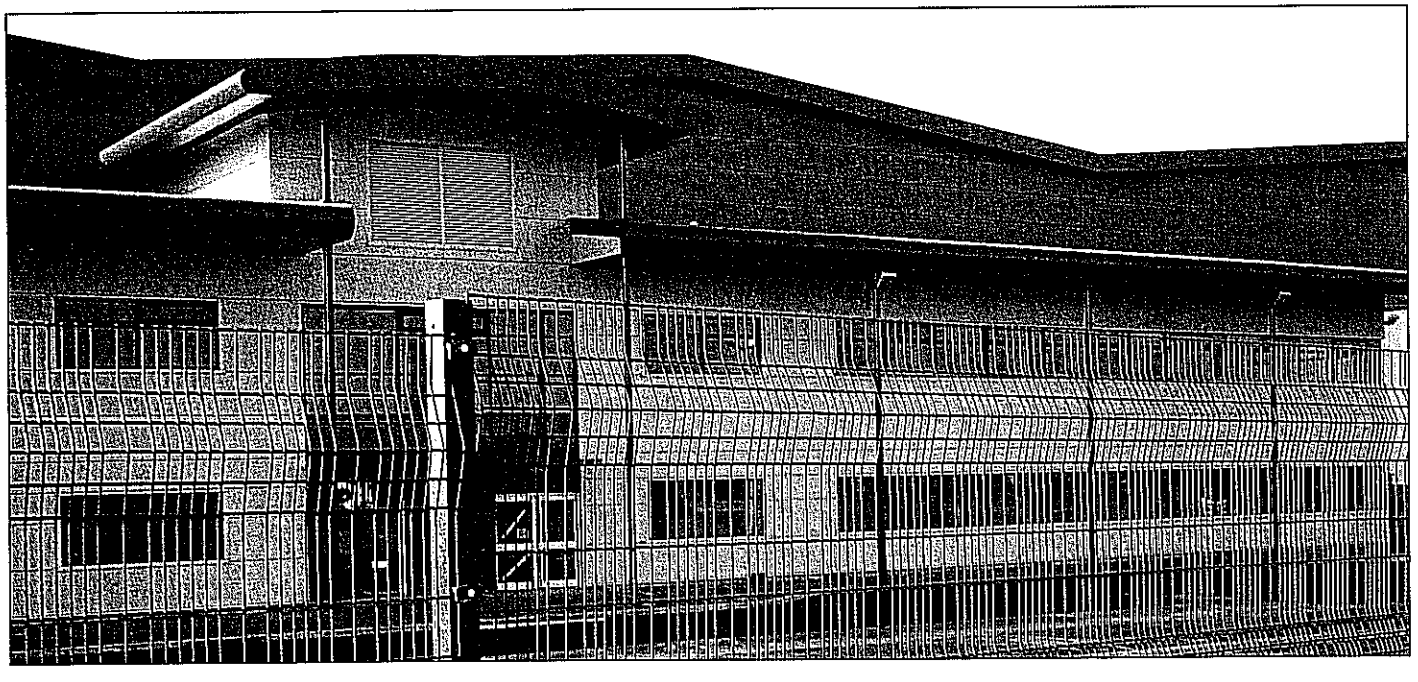