



NESTA S LED IN-GROUND

Designed for ground recessed installation, the NESTA S is available in a choice of colour finishes and colour temperatures.

With a system efficacy of up to 71lm/W, this fitting has a service lifetime of 50,000 hours, L70/B50.





SPECIFICATION

- Mounting: Ground recessed (GCD)
- Light source: LED
- Optical system: Lenses
- Wiring: Electronic control gear FIX (ECG)
- Materials
 - Housing: die-cast aluminium
 - Cover: transparent hardened glass
- Surface finish: NGG / ALL / INOX AISI 316L
- Service lifetime: 50,000 hours/L70/B50
- Ambient temperature: From -10 °C to +35 °C
- IP67
- 220-240V 50-60Hz



Suitable for a variety of outdoor applications.



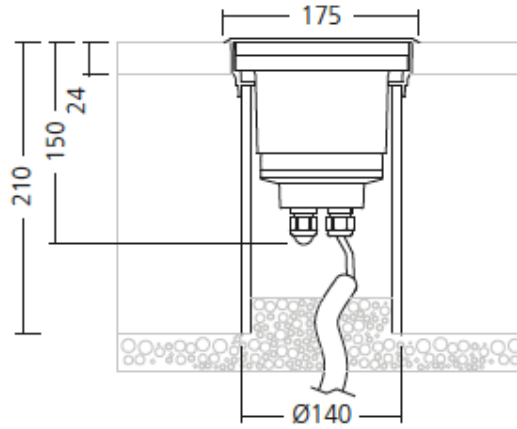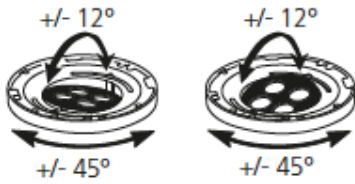

COLOUR VARIANTS:


NGG




ALL




INX



10°



30°



45°

TYPE	MOUNTING TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX CRI (Ra)	CORRELATED COLOUR TEMPERATURE CCT (K)	BEAM ANGLE (C0-180, C90-270)	WEIGHT (kg)
NESTA S	GCD	770	12	65	80	4000	45°	2,6
NESTA S	GCD	770	12	65	80	3000	45°	2,6
NESTA S	GCD	810	12	68	80	4000	30°	2,6
NESTA S	GCD	810	12	68	80	3000	30°	2,6
NESTA S	GCD	860	12	71	80	4000	10°	2,6
NESTA S	GCD	860	12	71	80	3000	10°	2,6

Luminous flux tolerance +/- 10%.

Spurlite Ltd

Unit 1, 6 Portman Road, Reading, Berkshire, RG30 1EA

T: 0118 955 3240 - F: 0118 959 5290 - E: sales@spurlite.co.uk

www.spurlite.co.uk



facebook.com/spurlite



@spurlite