

BS5837:2012

Perimeter of Root Protection Areas (RPA)
(retained trees only)

Cat A

Cat B


Cat C

Cat U

For all details see October 2019 Tree Report

TREE PROTECTION PLAN - OCTOBER 2019

2 m high metal tree protection fencing as per BS5837:2012 default tree protection specification
To be erected before any site works begin & maintained in situ until all demolition, construction
& associated landscaping has been completed

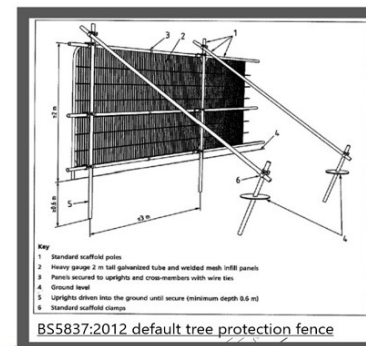

CAB Site accommodation
CP Contractors parking
M Materials storage
TS Topsoil storage

Outline of Existing House
scale @ 1:200



All works to be carried out as set out in Section C of the Tree Report
Arboriculturalist to maintain a watching brief