
Note: Light and sockets optional only where electric supply is accessible solely within the plot boundary

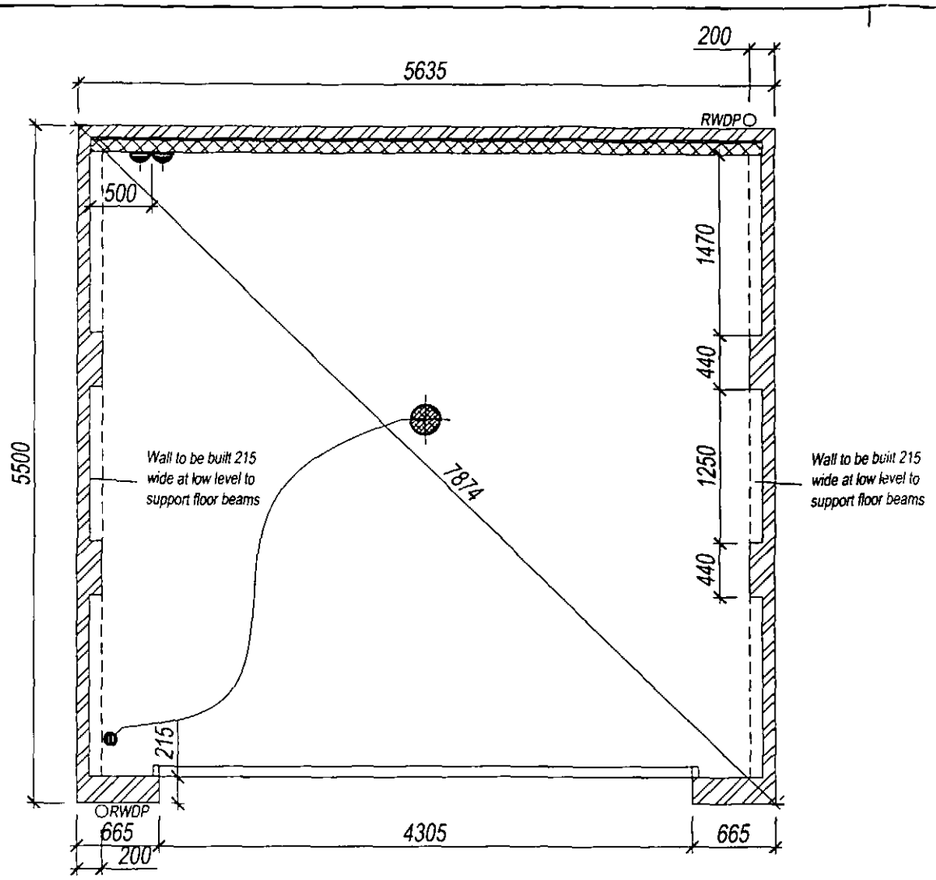

1 Foundations: To suit site conditions, normally 600 x 150 mm thick concrete strip foundations reinforced with 1 no layer A193 mesh GEN 3 min or as otherwise specified. All foundations to comply with approved document A, Part 1E of the Building Regulations 1995. Rafts or reinforced foundations as seperate details

2 Walls
a) DPC's to be 2000 ¯ guage black polythene in positions indicated and min 150 mm above ground level
b) LINTELS's to be galvanised pressed steel lintels (Catnic) or approved to BS 449 in positions indicated


3 GARAGE FLOOR to be 175 - 100 mm thick concrete (15 N/mm2) with 75 mm fall from back to front with 175mm beam and block proprietary floor system bearing on to load bearing 440 floor walls to be constructed in accordance with manufactures details. min 150 mm - 550 max thick. Concrete floor thickened out at garage door to 300 thick Garage floor to finish 25 mm above drive level

4. ROOF: to be concrete interlocking roof tiles to BS.5534 On 38 x 25 mm tile battens on roofing felt to BS.747 on pre-fabricated trussed rafters to BS.5268 part 3 1985 at 600 centres maximum Pitched roof spicked to 100 x 50 mm wall plate Every 3rd truss strapped to wall, min 1m down (All end trusses to be strapped). Bracing and binding to roof to conform with BS.5268 part 3 1985


5 RWP & GUTTERS: rwp's to be 63 mm internal diameter pvc to regulation H3 discharging into gully, gutters to be 100 mm diameter laid to falls and fixed in accordance with manufacturers instructions.

6 ANCHOR TIES. Roofs to be built into external gable walls at 1.8 m cts over 3 no. rafters and ceiling members of roof trusses . All anchor ties to be galvanised ms 30 mm wide x 5 mm thick Noggins, packings 38 x 1/2 member depth provided.

100 x 25 sw diagonal bracing at rafter level.
30 x 5 mm section galv. ms straps at rafter and ceiling levels at max 2m crs and over 3 no trusses
100 x 25 mm logitudinal binders at ridge, rafter and ceiling node points

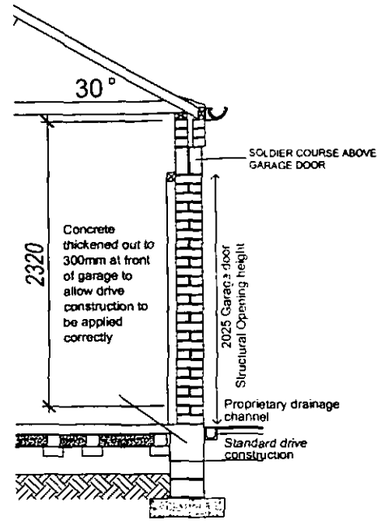


SECTION THROUGH

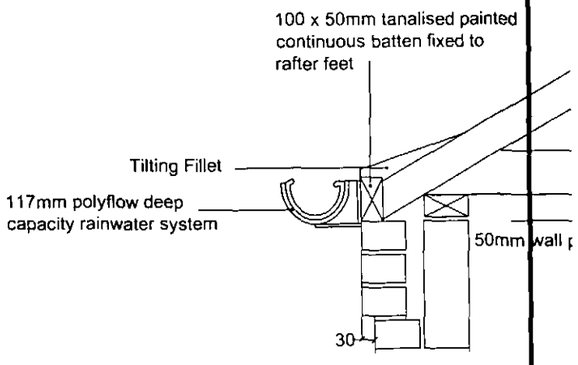

EAVES DETAIL

Please refer to site layout for position of personnel door. (Michigan door style 838x19 8 0). NOTE! doors to positioned a minimum 2m back from front elevation and 450mm in from an external corner

0 1M 2.5M 5.0M 10M

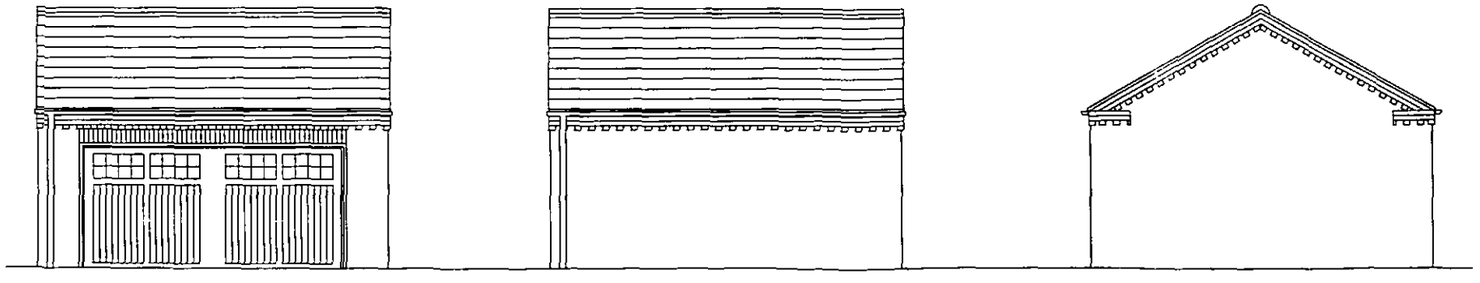

FRONT ELEVATION

REAR ELEVATION

SIDE ELEVATION

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE 2010

DRG. No. GARAGE/07/05 REV.

SCALE: 1:100, 1:50

Detached Double Garage

Note: Light and sockets optional only where electric supply is accessible solely within the plot boundary

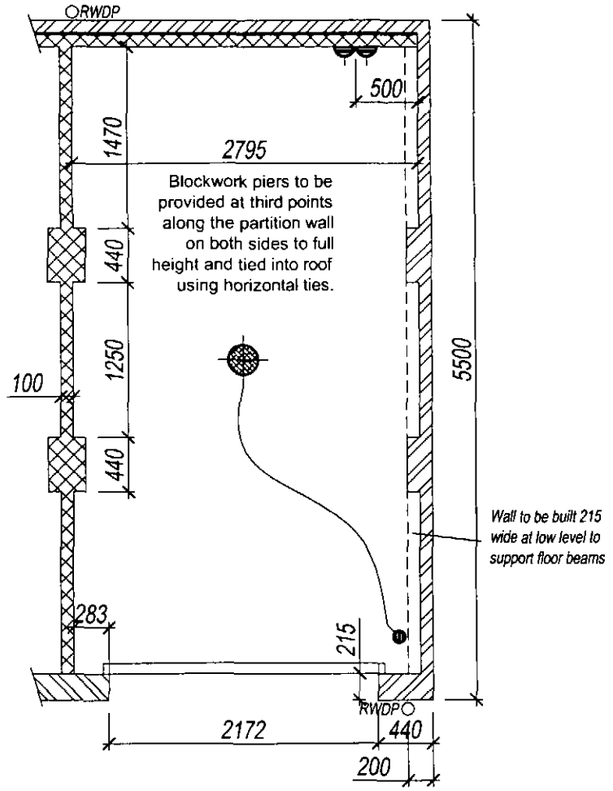

Please refer to site layout for position of personnel door. (Michigan door style 838x19 8 0). NOTE! doors to positioned a minimum 2m back from front elevation and 450mm in from an external corner

0 1M 2.5M 5.0M 10M

1. Foundations: To suit site conditions, normally 600 x 150 mm thick concrete strip foundations reinforced with 1 no layer A193 mesh GEN 3 mix or as otherwise specified All foundations to comply with approved document A, Part 1E of the Building Regulations 1995, Rafts or reinforced foundations as separate details

2 Walls
a) DPC's to be 2000 T guage black polythene in positions indicated and min 150 mm above ground level
b) LINTELS's to be galvanised pressed steel lintels (Catnic) or approved to BS 449 in positions indicated


3 GARAGE FLOOR: to be 175 - 100 mm thick concrete (15 N/mm2) with 75 mm fall from back to front with 175mm beam and block proprietary floor system bearing on to load bearing sub floor walls to be constructed in accordance with manufacturers details min 150 mm - 550 max thick. Concrete floor thickened out at garage door to 300 thick Garage floor to finish 25 mm above drive level.

4 ROOF, to be concrete interlocking roof tiles to BS 5534 on 38 x 25 mm tile battens on roofing felt to BS.747 on pre-fabricated trussed rafters to BS 5268 part 3 1985 at 600 centres maximum.. Pitched roof spicked to 100 x 50 mm wall plate Every 3rd truss strapped to wall, min 1m down (All end trusses to be strapped). Bracing and binding to roof to conform with BS.5268 part 3 1985


5 RWP & GUTTERS. rwp's to be 63 mm internal diameter pvc to regulation H3. discharging into gully, gutters to be 100 mm diameter fixed to falls and fixed in accordance with manufacturers instructions

6 ANCHOR TIES: Roofs to be built into external gable walls at 1.8 m cts over 3 no rafters and ceiling members of roof trusses . All anchor bes to be galvanised ms 30 mm wide x 5 mm thick. Noggins, packings 38 x 1/2 member depth provided


100 x 25 sw diagonal bracing at rafter level.
30 x 5 mm section galv. ms straps at rafter and ceiling levels at max. 2m crs and over 3 no trusses
100 x 25 mm logitudinal binders at ridge, rafter and ceiling node points

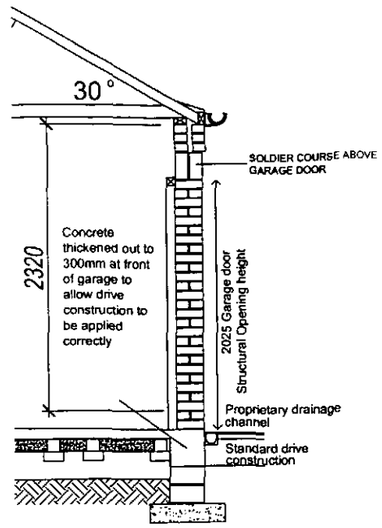

SECTION THROUGH

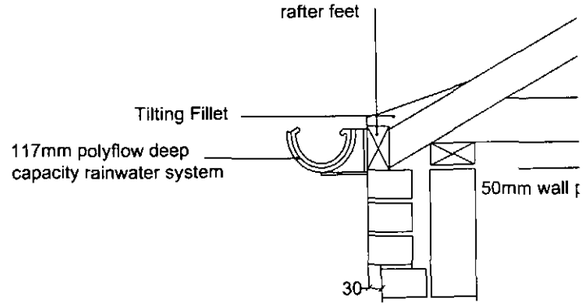

EAVES DETAIL

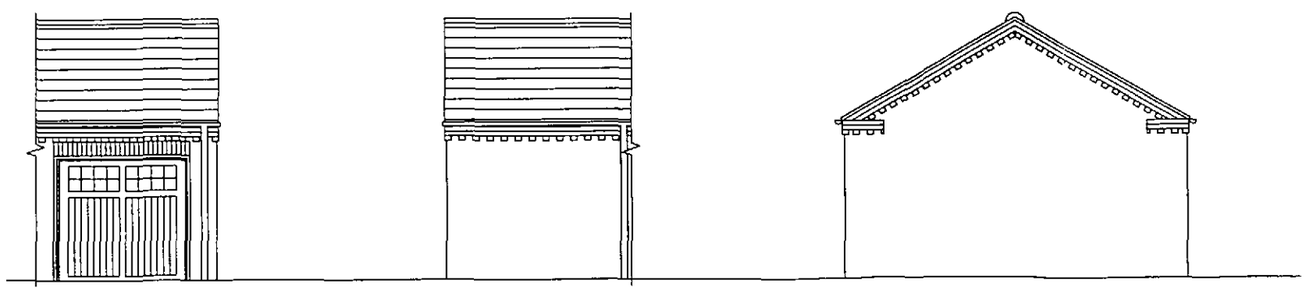

FRONT ELEVATION REAR ELEVATION SIDE ELEVATION

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE 2010

DRG. No. GARAGE/07/04 REV.

SCALE: 1:100, 1:50


Right Hand Side Single Garage

Note: Light and sockets optional only where electric supply is accessible solely within the plot boundary

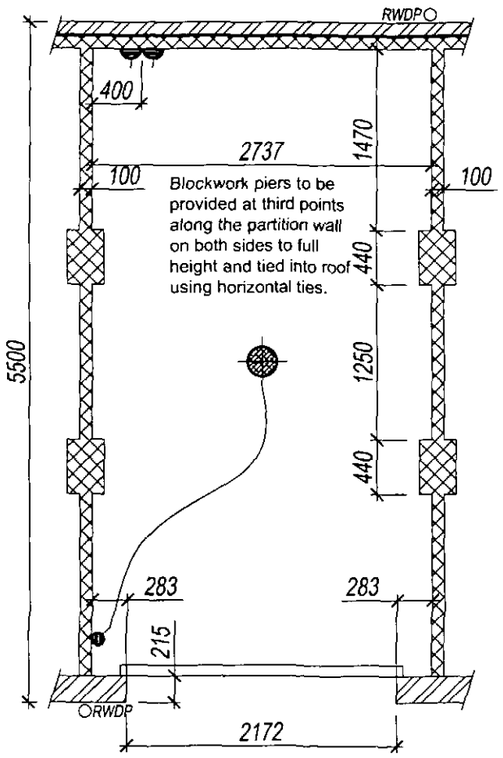

Please refer to site layout for position of personnel door.
(Michigan door style 838x1980).
NOTE! doors to positioned a minimum 2m back from front elevation and 450mm in from an external corner

0 1M 2.5M 5.0M 10M

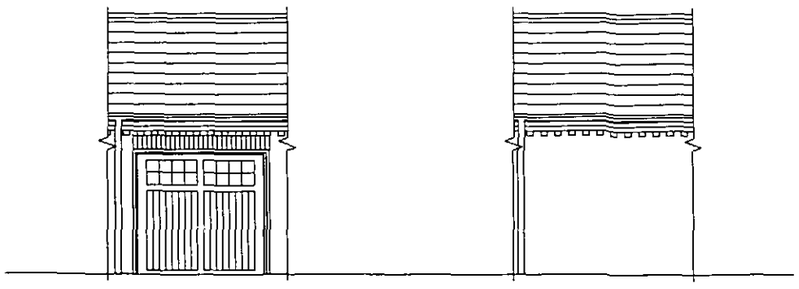

FRONT ELEVATION REAR ELEVATION

1. Foundations To suit site conditions, normally 600 x 150 mm thick concrete strip foundations reinforced with 1 no layer A193 mesh GEM 3 mix or as otherwise specified All foundations to comply with approved document A, Part 1E of the Building Regulations 1995. Rafts or reinforced foundations as separate details

2 Walls
a) DPC's to be 2000 T guage black polythene in positions indicated and min 150 mm above ground level.
b) LINTELS's to be galvanised pressed steel lintels (Catnic) or approved to BS 449 in positions indicated.


3 GARAGE FLOOR. *to be 175 - 100 mm thick* concrete (15 N/mm2) with 75 mm fall from back to front with 175mm beam and block proprietary floor system bearing on to load bearing sub floor walls to be constructed in accordance with manufacturers details, min. 150 mm - 560 max thick Concrete floor thickened out at garage door to 300 thick. Garage floor to finish 25 mm above drive level

4 ROOF: to be concrete interlocking roof tiles to BS.5534 on 38 x 25 mm tile battens on roofing felt to BS.747 on pre-fabricated trussed rafters to BS.5268 part 3 1985 at 600 centres maximum.. Pitched roof spiked to 100 x 50 mm wall plate Every 3rd truss strapped to wall, min 1m down (All end trusses to be strapped) Bracing and binding to roof to conform with BS 5268 part 3 1985.


5. RWP & GUTTERS: rwp's to be 63 mm internal diameter pvc to regulation H3 discharging into gully, gutters to be 100 mm diameter laid to falls and fixed in accordance with manufacturers instructions.

6. ANCHOR TIES. Roofs to be built into external gable walls at 1.8 m cts over 3 no. rafters and ceiling members of roof trusses . All anchor bes to be galvanised ms 30 mm wide x 5 mm thick. Noggins, packings 38 x 1/2 member depth provided.

100 x 25 sw diagonal bracing at rafter level.
30 x 5 mm section galv. ms straps at rafter and ceileng levels at max 2m crs and over 3 no trusses
100 x 25 mm logitudinal binders at ridge, rafter and ceiling node points

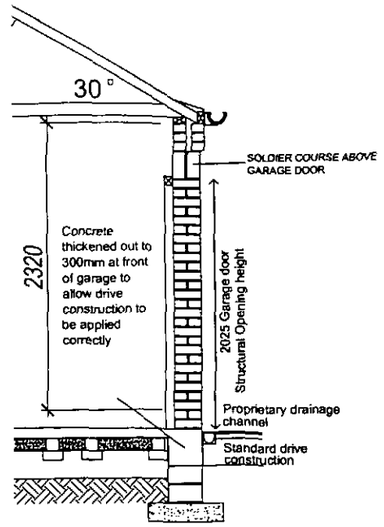

SECTION THROUGH

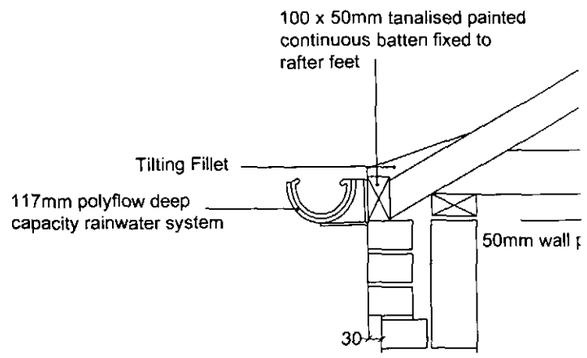

EAVES DETAIL

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE 2010

DRG. No. GARAGE/07/03 REV.

SCALE: 1:100, 1:50

Mid Single Garage

Note: Light and sockets optional only where electric supply is accessible solely within the plot boundary

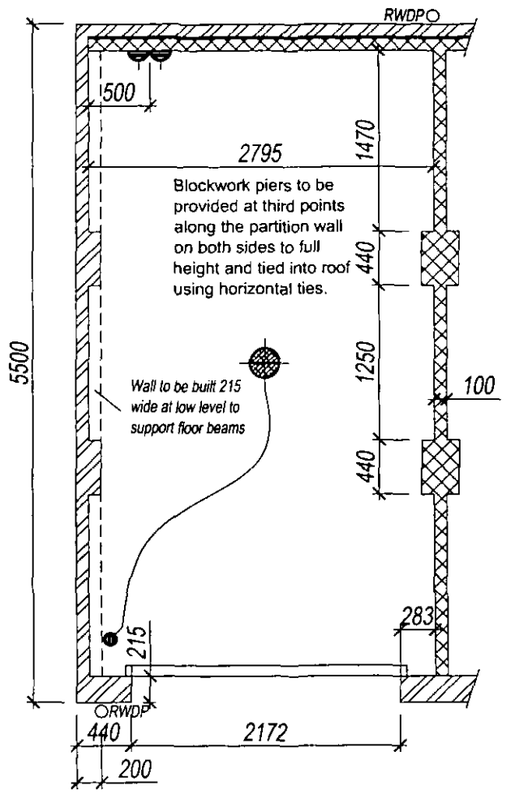

Please refer to site layout for position of personnel door. (Michigan door style 838x19 8 0). NOTE! doors to positioned a minimum 2m back from front elevation and 450mm in from an external corner

0 1M 2.5M 5.0M 10M

1. Foundations To suit site condtions, normally 600 x 150 mm thick concrete strip foundations reinforced with 1 no layer A193 mesh GEN 3 mix or as otherwrite specified All foundations to comply with approved document A, Part 1E of the Building Regulations 1995, Rafts or reinforced foundations as separate details

2 Walls
a) DPC's to be 2000 T guage black polythene in positions indicated and min 150 mm above ground level
b) LINTELS's to be galvanised pressed steel lintels (Catnic) or approved to BS 449 in positions indicated


3 *GARAGE FLOOR.* to be 175 - 100 mm thick concrete (15 N/mm2) with 75 mm fall from back to front with 175mm beam and block proprietary floor system bearing on to load bearing sub floor walls to be constructed in accordance with manufacturers details min 150 mm - 550 max thick Concrete floor thickened out at garage door to 300 thick Garage floor to finish 25 mm above drive level

4 ROOF: to be concrete interlocking roof tiles to BS 5534 on 38 x 25 mm tile battens on roofing felt to BS 747 on pre-fabricated trussed rafters to BS 5268 part 3 1985 at 600 centres maximum.. Pitched roof spaced to 100 x 50 mm wall plate Every 3rd truss strapped to wall, min 1m down (All end trusses to be strapped) Bracing and binding to roof to conform with BS 5268 part 3 1985


5 RWP & GUTTERS: rwp's to be 63 mm internal diameter pvc to regulation H3 discherging into gully, gutters to be 100 mm diameter laid to falls and fixed in accordance with manufacturers instructions

6 ANCHOR TIES: Roofs to be built into external gable walls at 1.8 m cts over 3 no rafters and *ceiling members of roof trusses* . All anchor bes to be galvanised ms 30 mm wide x 5 mm thick. Noggins, packings 38 x 1/2 member depth provided


100 x 25 sw diagonal bracing at rafter level
30 x 5 mm section galv. ms. straps at rafter and ceiling levels at max *2m cts and over 3 no trusses.*
100 x 25 mm logtudinal binders at ridge, rafter and ceiling node points.

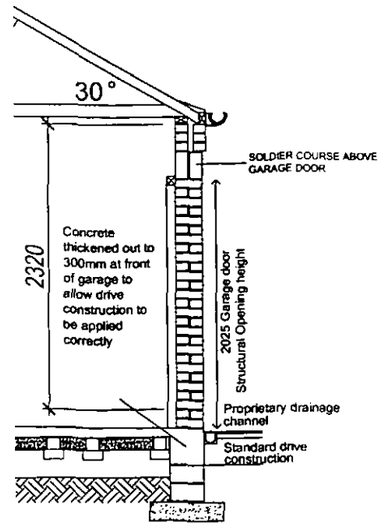

SECTION THROUGH

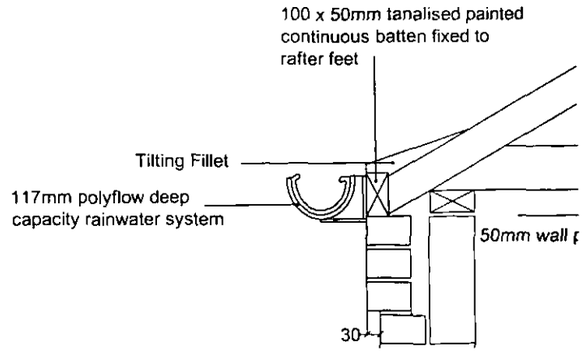

EAVES DETAIL

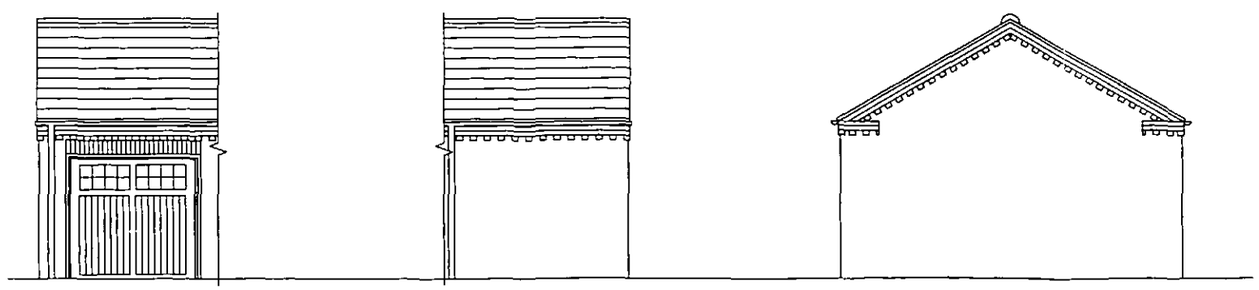

FRONT ELEVATION REAR ELEVATION SIDE ELEVATION

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ


BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE 2010

DRG. No. GARAGE/07/02 REV.

SCALE: 1:100, 1:50

Left Hand Side Single Garage

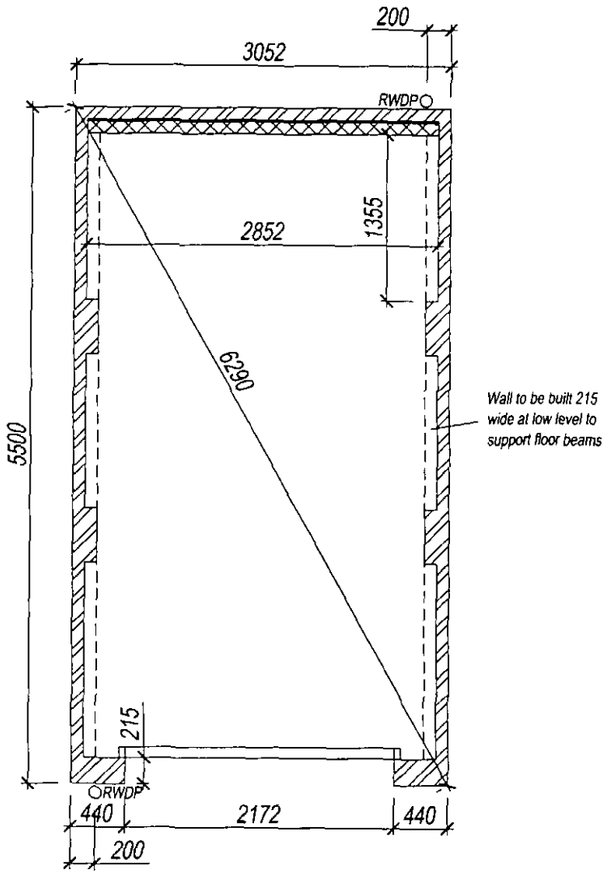

1. Foundations: To suit site conditions, normally 600 x 150 mm thick concrete strip foundations reinforced with 1 no. layer A193 mesh GEN 3 mix or as otherwise specified. All foundations to comply with approved document A, Part 1E of the Building Regulations 1995. Rafts or reinforced foundations as separate details

2. Walls:
a) DPC's to be 2000 ? guage black polythene in positions indicated and min 150 mm above ground level.
b) LINTELS's to be galvanised pressed steel lintels (Catnic) or approved to BS 449 in positions indicated


3 GARAGE FLOOR to be 175 - 100 mm thick concrete (15 N/mm2) with 75 mm fall from back to front with 175mm beam and block proprietary floor system bearing on to load bearing sub floor walls to be constructed in accordance with manufacturers details, min 150 mm - 550 max thick. Concrete floor thickened out at garage door to 300 thick Garage floor to finish 25 mm above drive level

4. ROOF: to be concrete interlocking roof tiles to BS 5534 on 38 x 25 mm tile battens on roofing felt to BS 747 on pre-fabricated trussed rafters to BS 5268 part 3 1985 at 600 centres maximum. Pitched roof spicked to 100 x 50 mm wall plate Every 3rd truss strapped to wall, min 1m down (All end trusses to be strapped) Bracing and binding to roof to conform with BS 5268 part 3 1985


5. RWP & GUTTERS rwp's to be 63 mm internal diameter pvc to regulation H3 discharging into gully, gutters to be 100 mm diameter laid to falls and fixed in accordance with manufacturers instructions.

6 ANCHOR TIES. Roofs to be built into external gable walls at 1.8 m cts over 3 no rafters and ceiling members of roof trusses . All anchor ties to be galvanised ms 30 mm wide x 5 mm thick Noggins, sectungs 38 x 1/2 member depth provided


100 x 25 ew diagonal bracing at rafter level
30 x 5 mm section galv ms straps at rafter and ceiling levels at max 2m crs and over 3 no trusses
100 x 25 mm longitud nail binders at ridge, rafter and ceiling node points

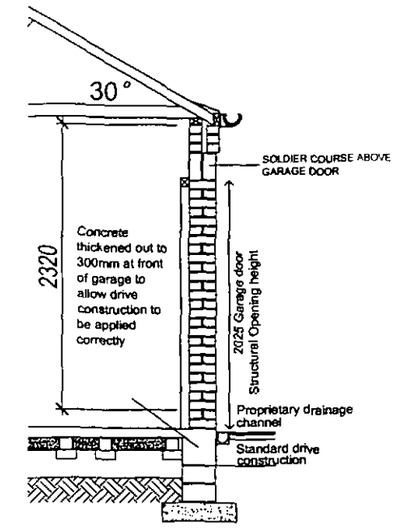

SECTION THROUGH

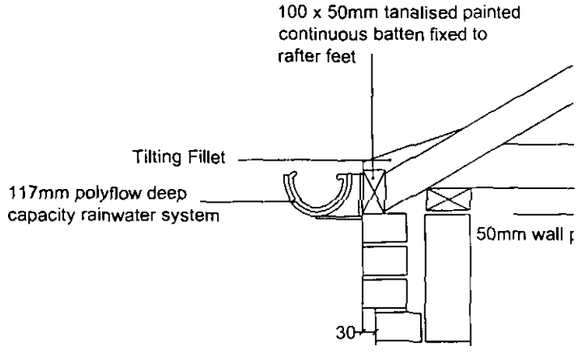

EAVES DETAIL

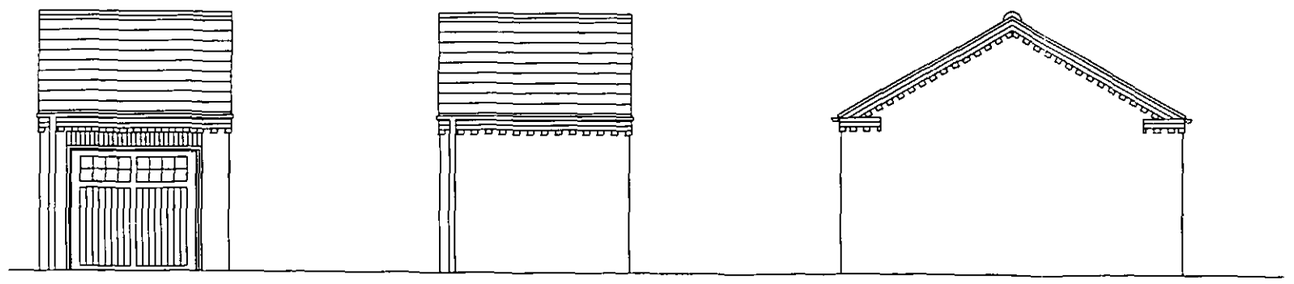

FRONT ELEVATION

REAR ELEVATION

SIDE ELEVATION

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE 2010


DRG. No. GARAGE/07/01 REV.

SCALE: 1:100, 1:50


Detached Single Garage




FRONT ELEVATION

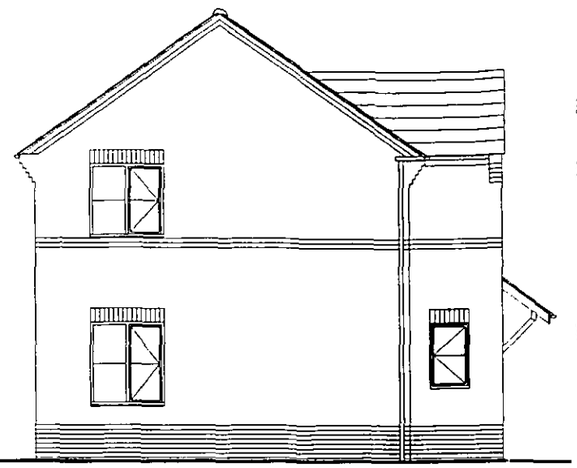

SIDE ELEVATION

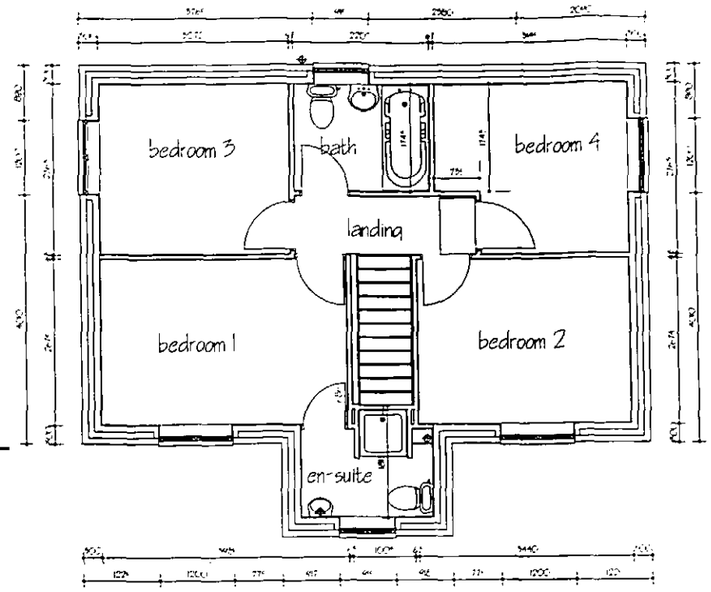


FIRST FLOOR

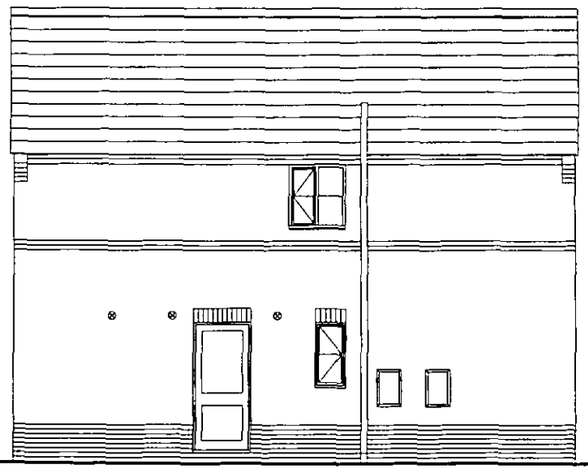

REAR ELEVATION



SIDE ELEVATION

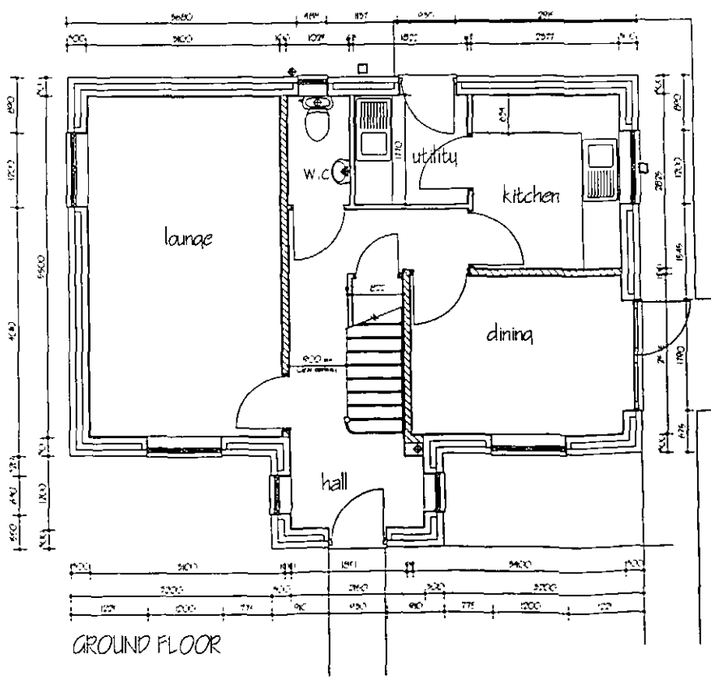

GROUND FLOOR

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
CON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Vt/Planning/09	REV. -


SCALE: 1:100

Victor Planning Layout


Victor
2009 Housetype Range
1082sqft/100.5sqm



FRONT ELEVATION

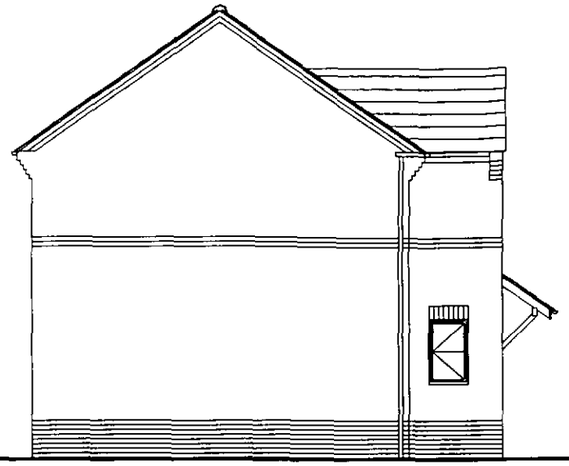


SIDE ELEVATION

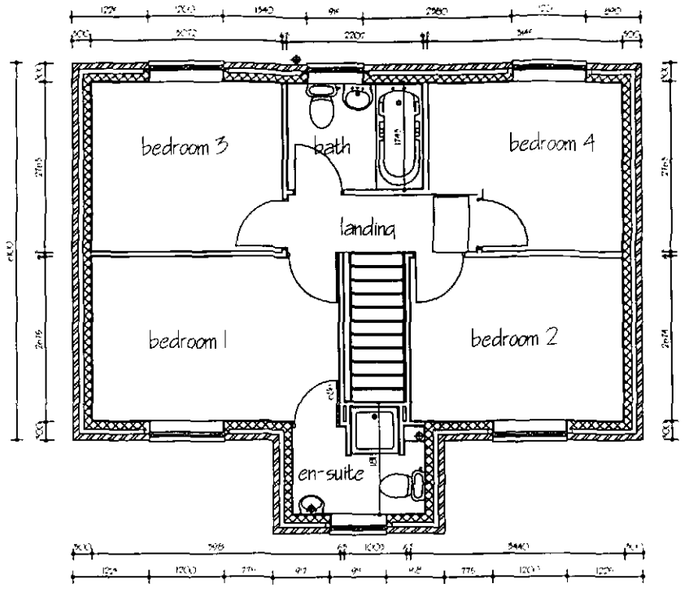


FIRST FLOOR



REAR ELEVATION

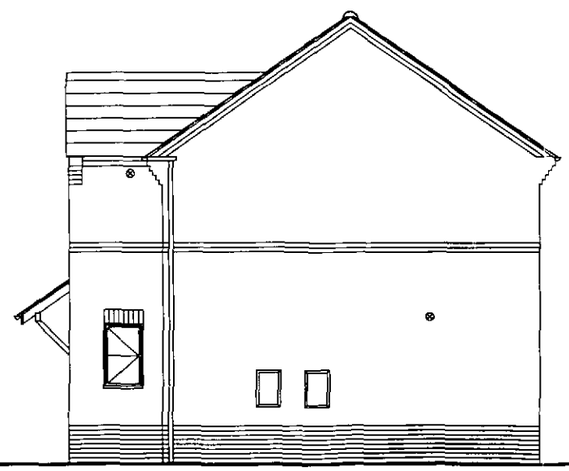

SIDE ELEVATION

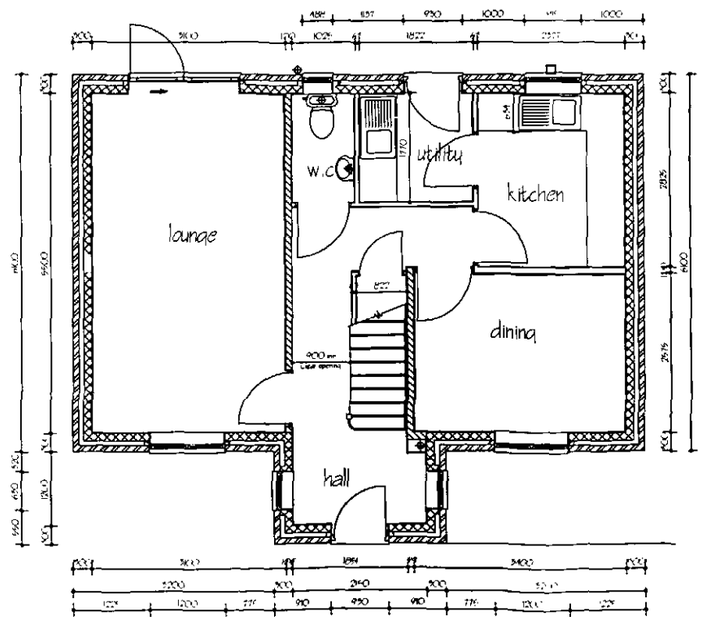

GROUND FLOOR

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Vc/Planning/09 REV. -


SCALE: 1:100

Vulcan Planning Layout


Vulcan
2009 Housetype Range
1082sqft/100.5sqm



FRONT ELEVATION

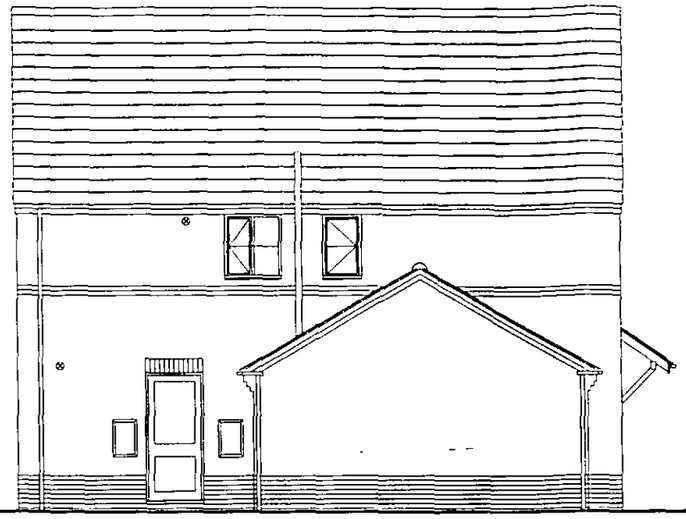


SIDE ELEVATION

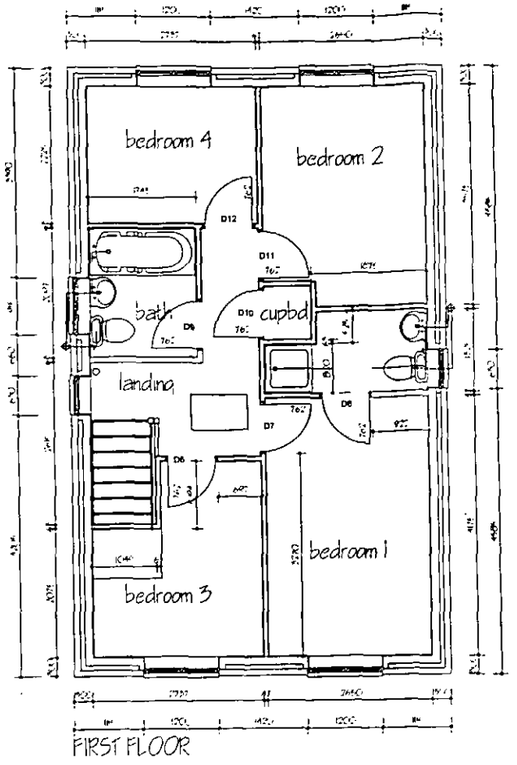


FIRST FLOOR



REAR ELEVATION

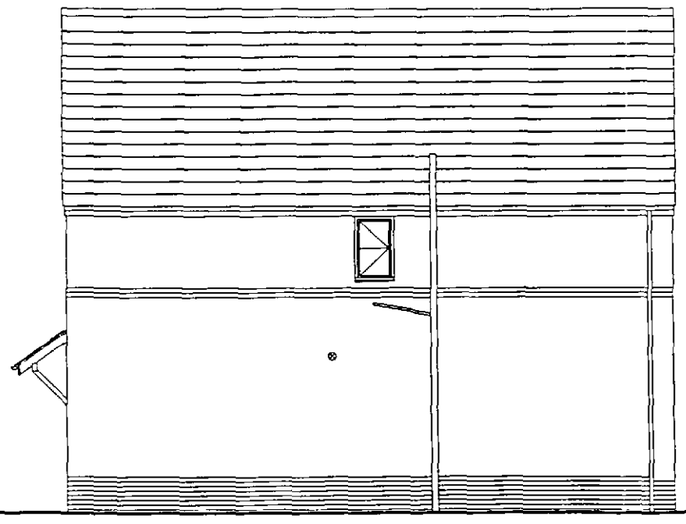

SIDE ELEVATION

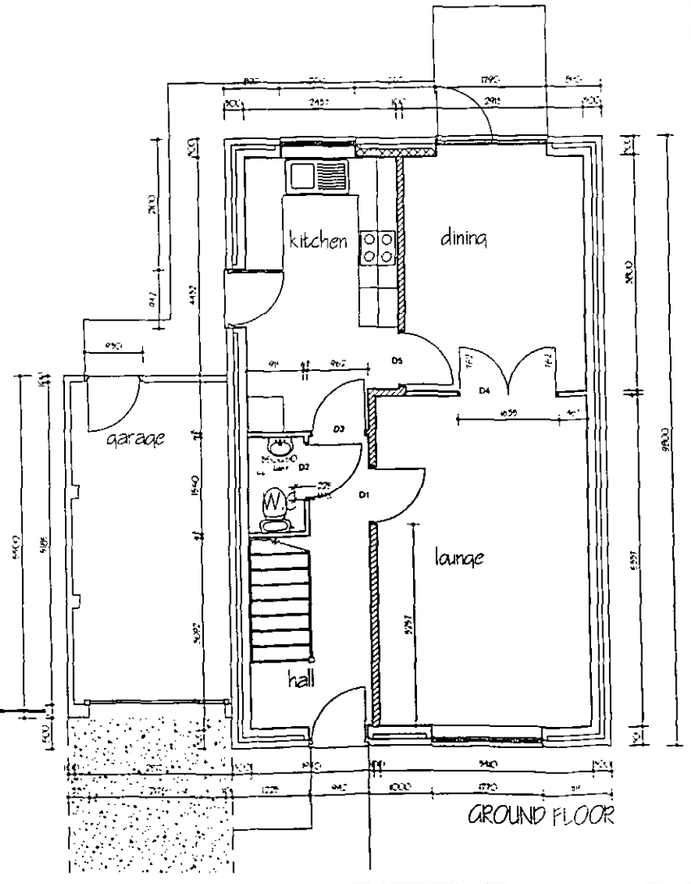

GROUND FLOOR

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Lh/Planning/09 REV. -


SCALE: 1:100

Lockheed Planning Layout


Lockheed
2009 Housetype Range
1080sqft/100.3sqm

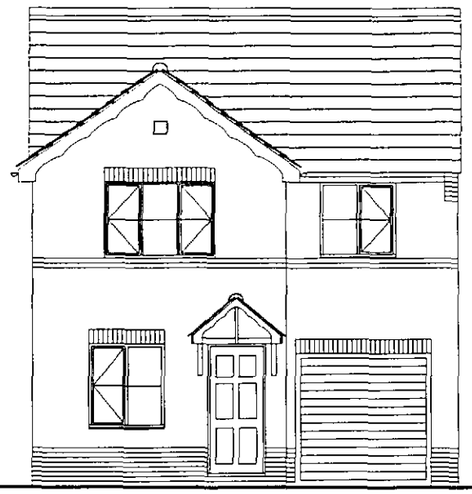


FRONT ELEVATION

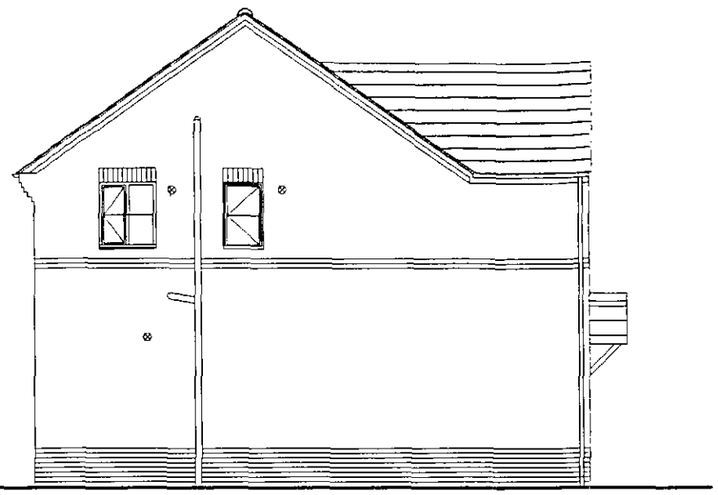


SIDE ELEVATION

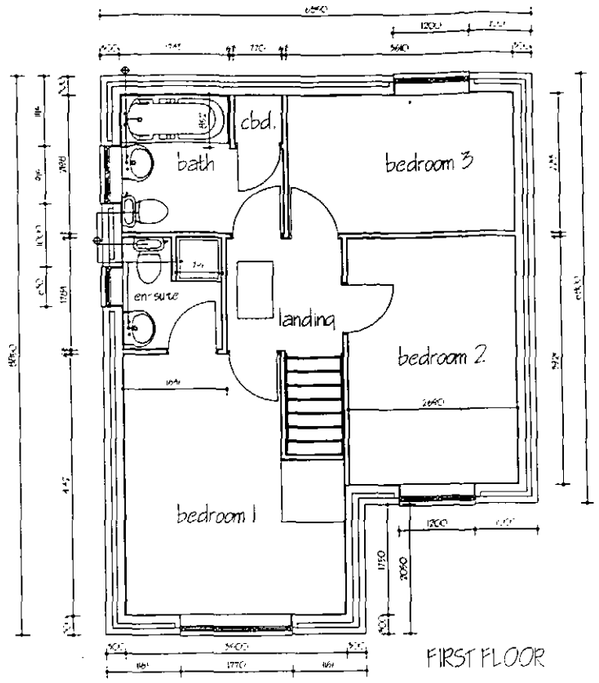


FIRST FLOOR

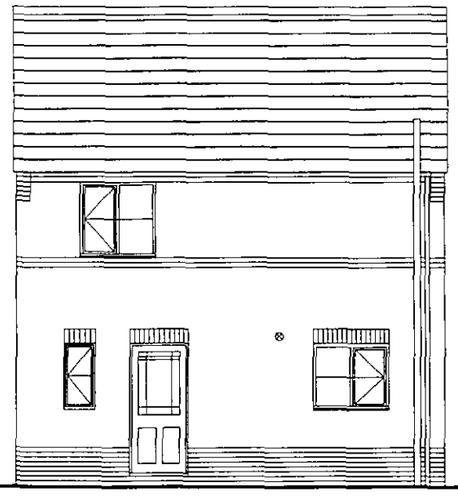

REAR ELEVATION

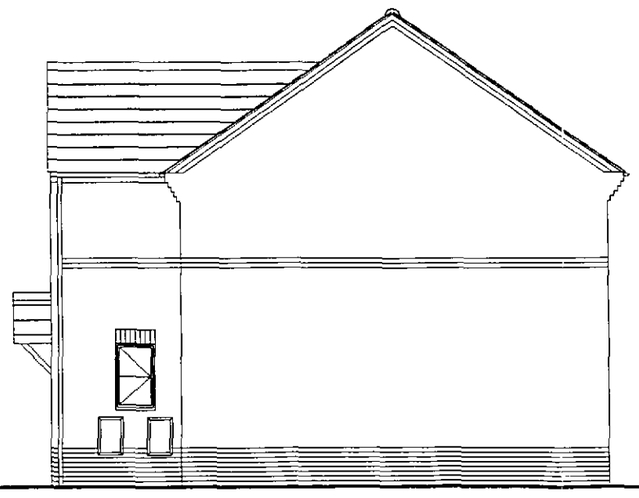

SIDE ELEVATION

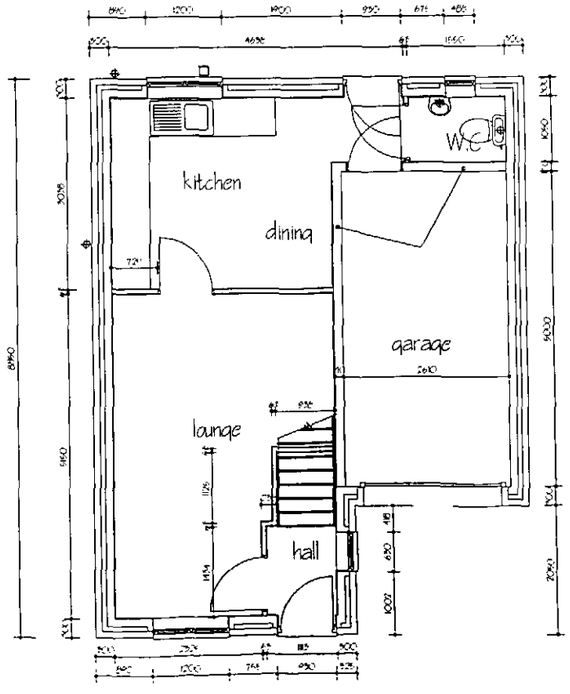

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Hy/Planning/09 | REV. -


SCALE: 1:100

Handley Planning Layout


Handley
2009 Housetype Range
836sqft/77.7sqm




FRONT ELEVATION

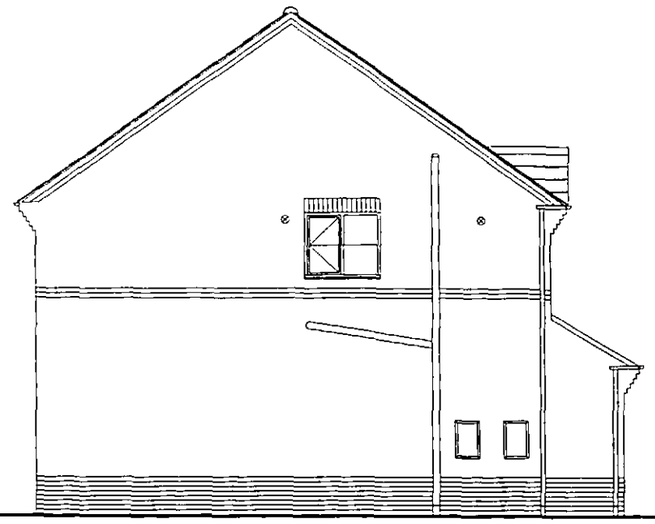


SIDE ELEVATION

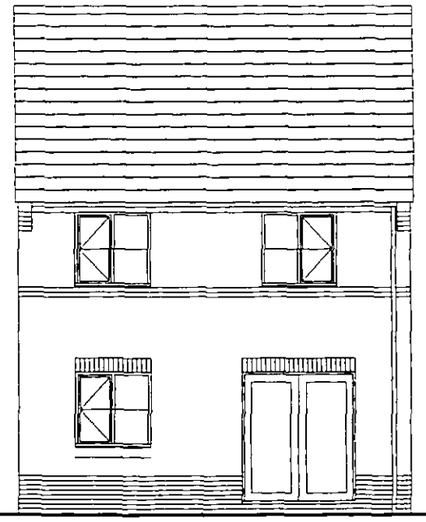

REAR ELEVATION

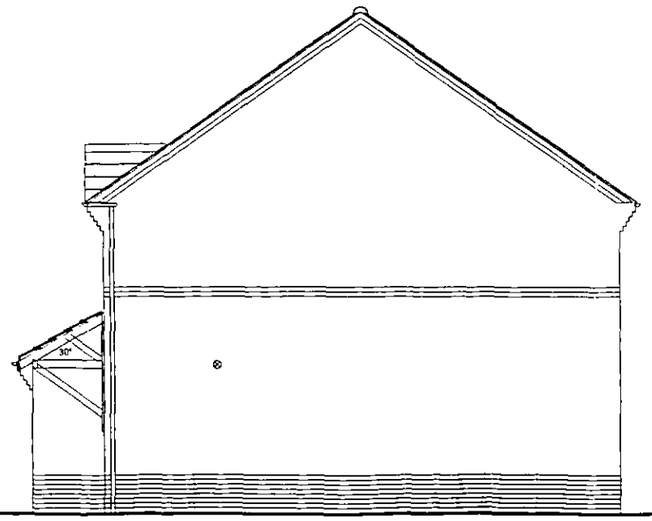

SIDE ELEVATION

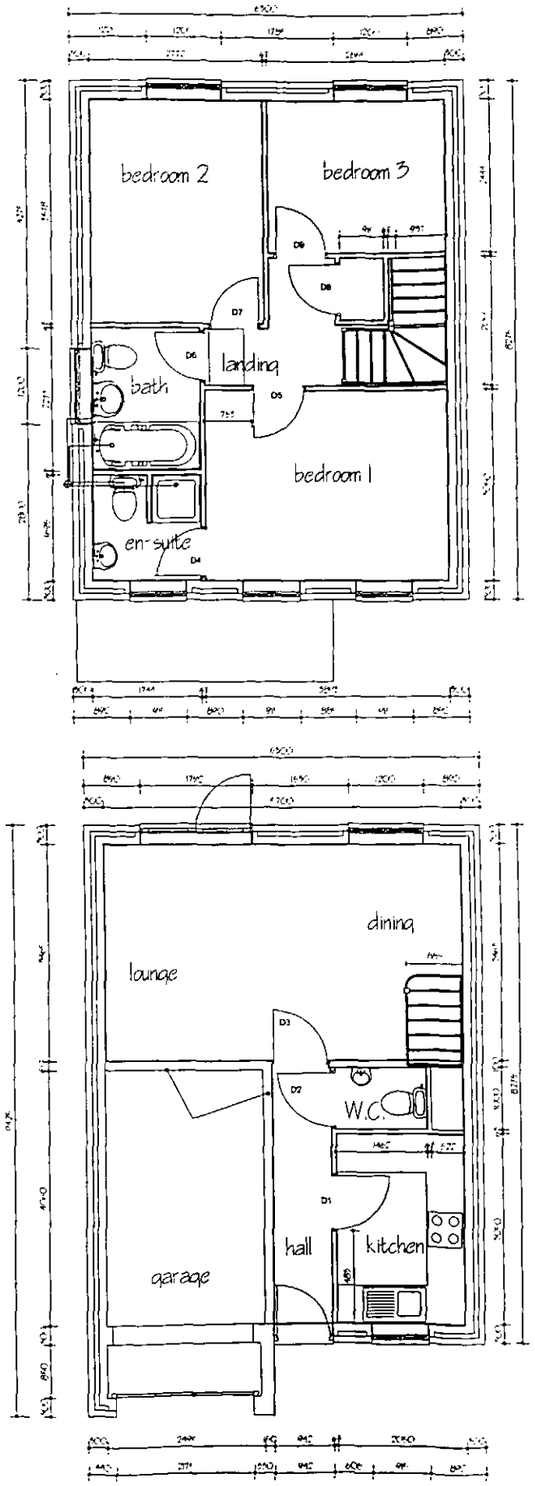

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
1CON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Hk/Planning/09 REV. -


SCALE: 1:100

Hawker Planning Layout


Hawker
2009 Housetype Range
823sqft/76.5sqm

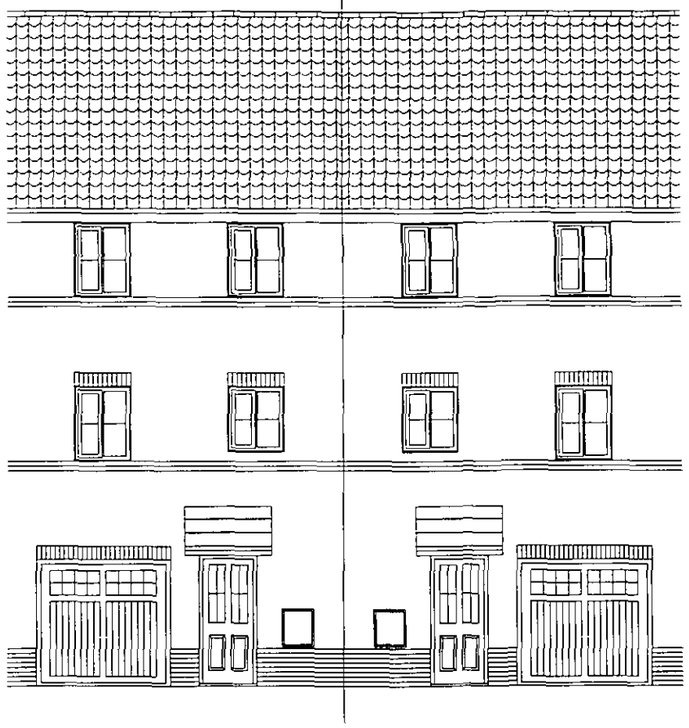


FRONT ELEVATION

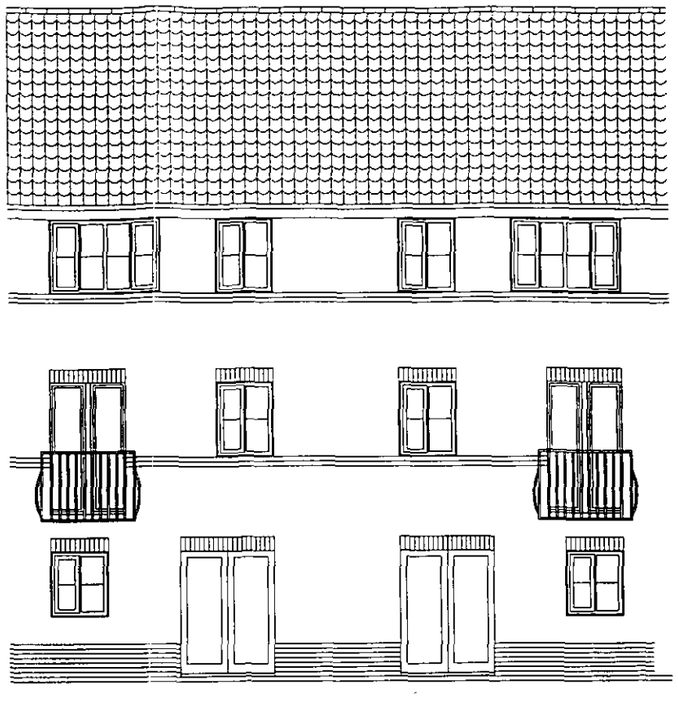


REAR ELEVATION

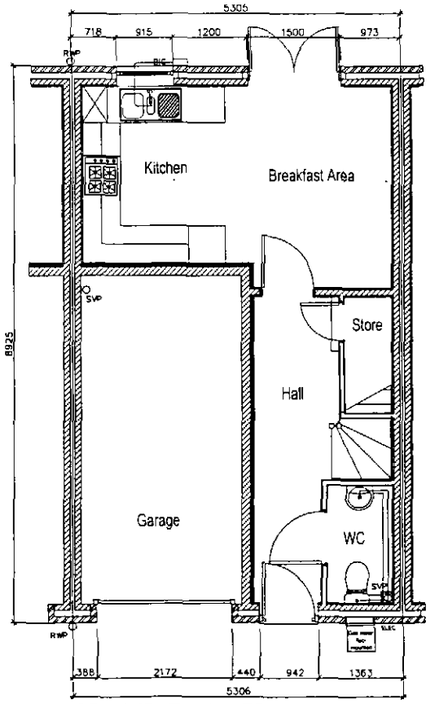

GROUND FLOOR PLAN

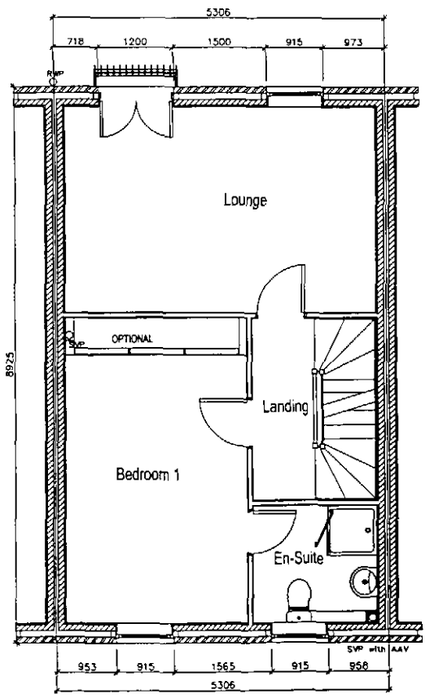

FIRST FLOOR PLAN

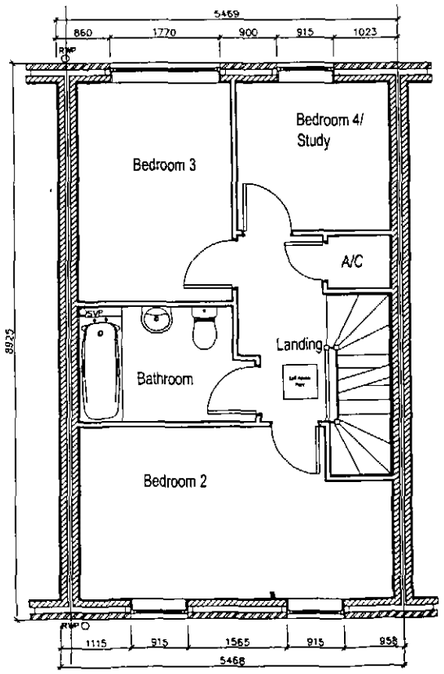

SECOND FLOOR PLAN

0 1M 2.5M 5.0M 10M

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE 03/03/10

DRG. No. Fs2/Planning/09 REV.

SCALE: 1:100


Planning Drawing

Felixstowe 2
2009 House Type Range
1194 sq.ft/110.9sqm




FRONT ELEVATION


REAR ELEVATION

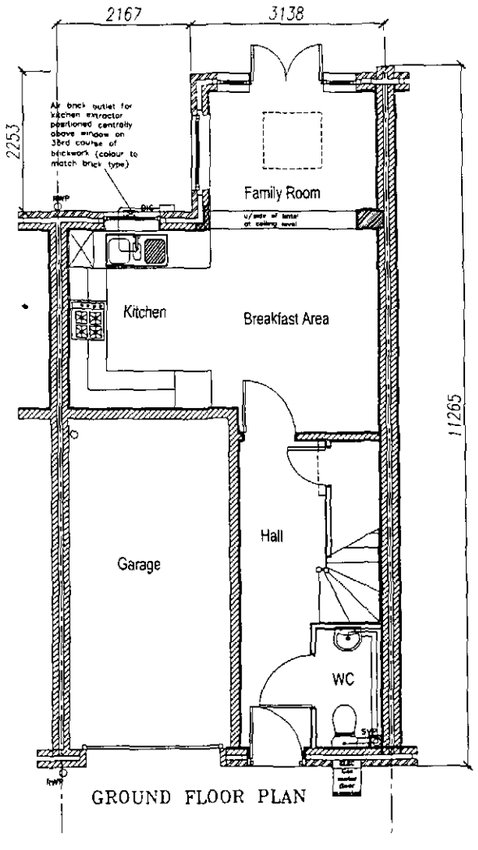

GROUND FLOOR PLAN

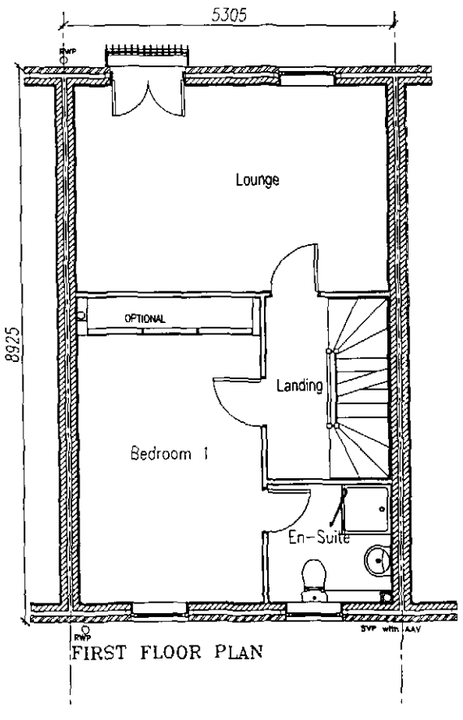

FIRST FLOOR PLAN

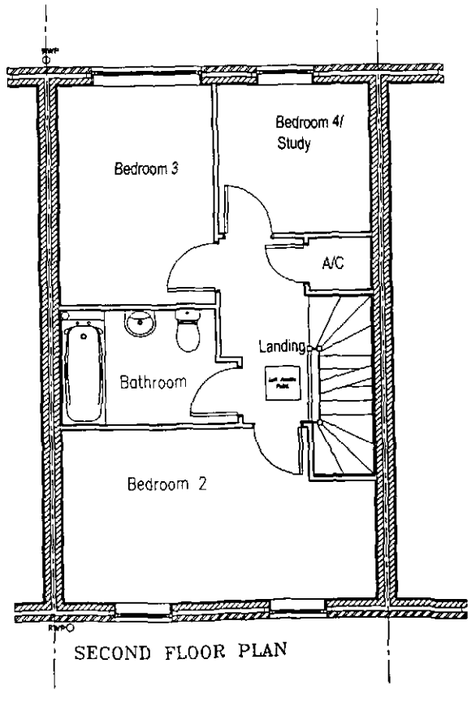

SECOND FLOOR PLAN

0 1M 2.5M 5.0M 10M

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ


DRAWN A.J.E	CHECKED	DATE 03/03/10

DRG. No. Fe2/Planning/09 REV.


SCALE: 1:100

Planning Drawing


Folkestone 2
2009 House Type Range
1259 sq.ft/117sqm

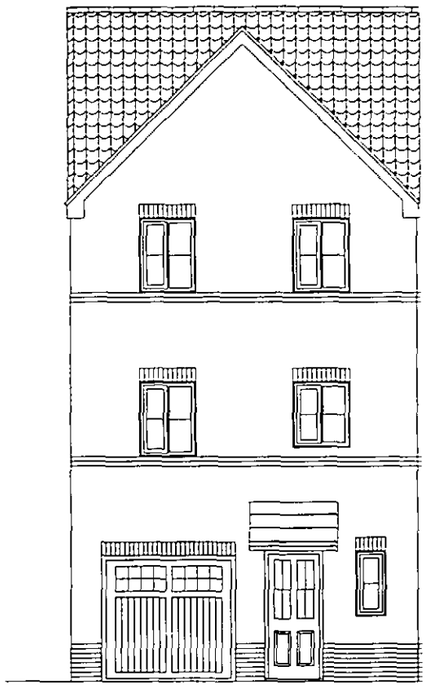


FRONT ELEVATION

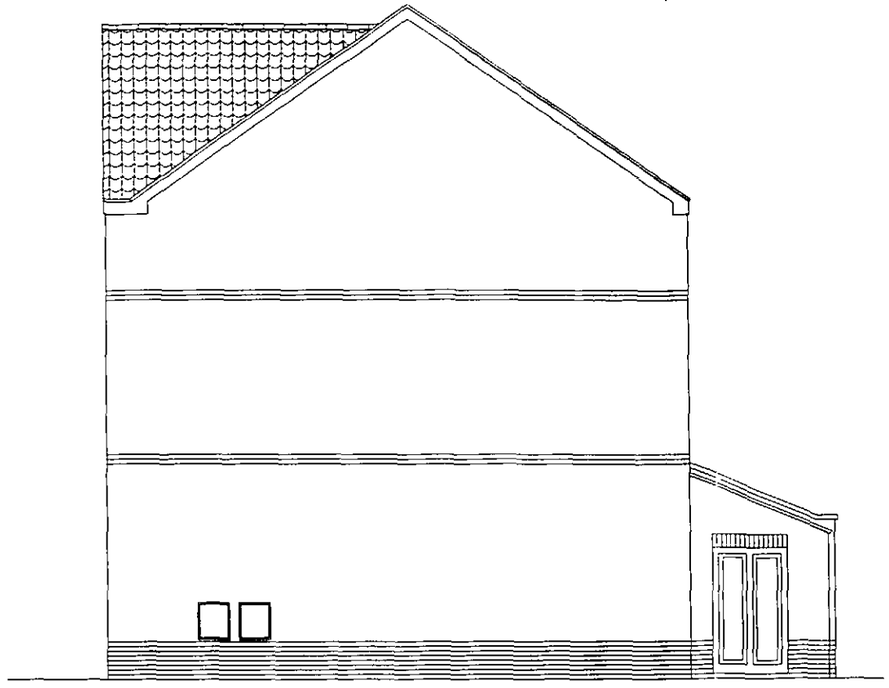


SIDE ELEVATION

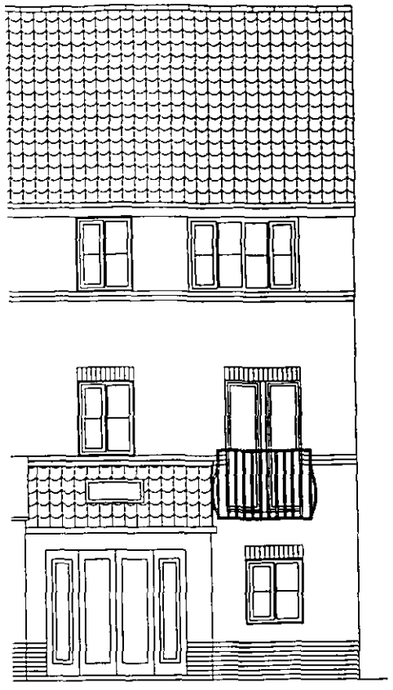


REAR ELEVATION

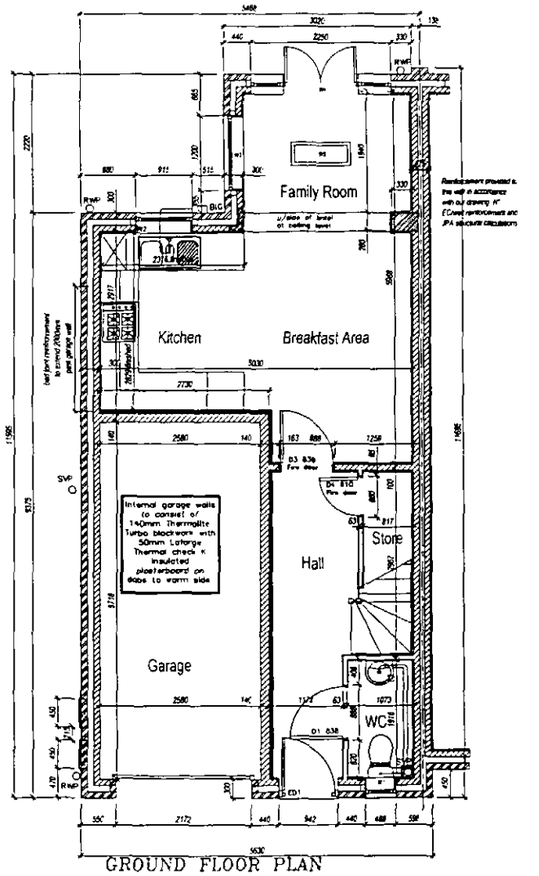

GROUND FLOOR PLAN

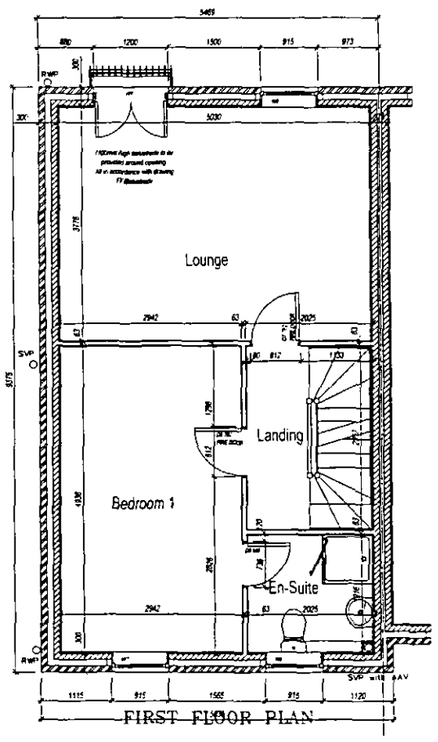

FIRST FLOOR PLAN

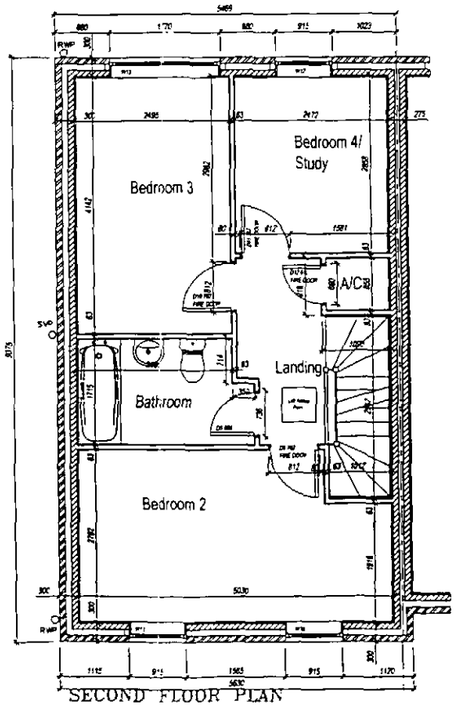

SECOND FLOOR PLAN

0 1M 2.5M 5.0M 10M

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JD

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE 03/03/10

DRG. No. F12/Planning/09 REV.


SCALE: 1:100

Planning Drawing

Fontwell 2
2009 House Type Range
1326 sq.ft 123 sq.m.

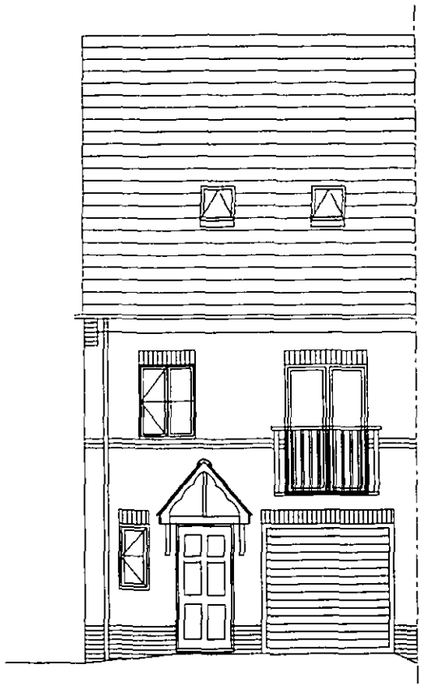


FRONT ELEVATION

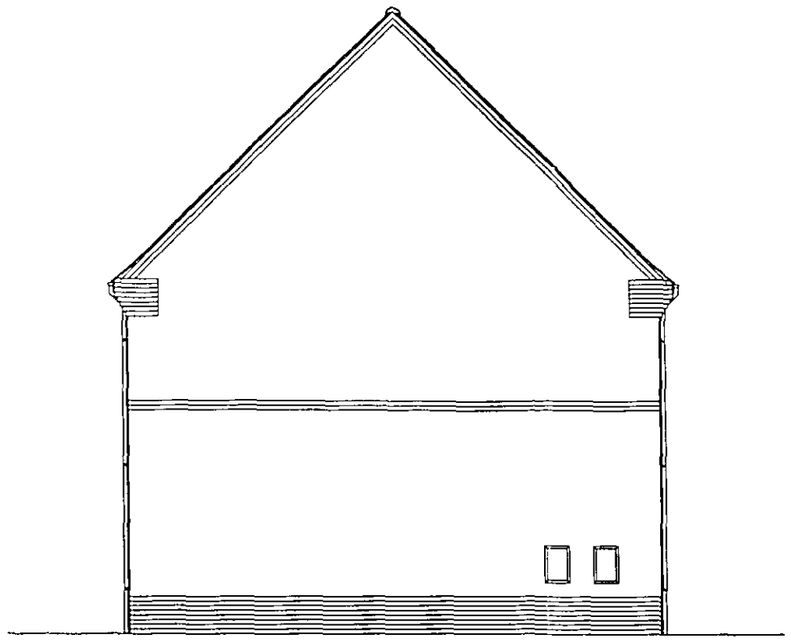


SIDE ELEVATION




REAR ELEVATION

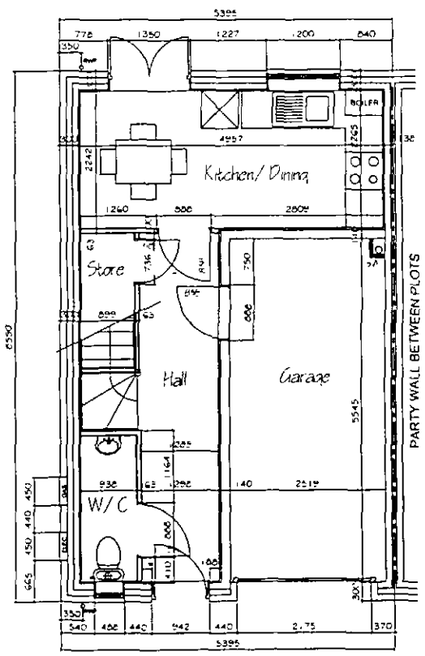

GROUND FLOOR PLAN

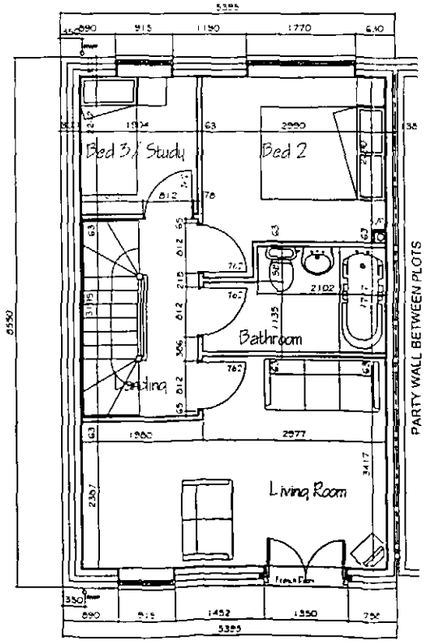

FIRST FLOOR PLAN

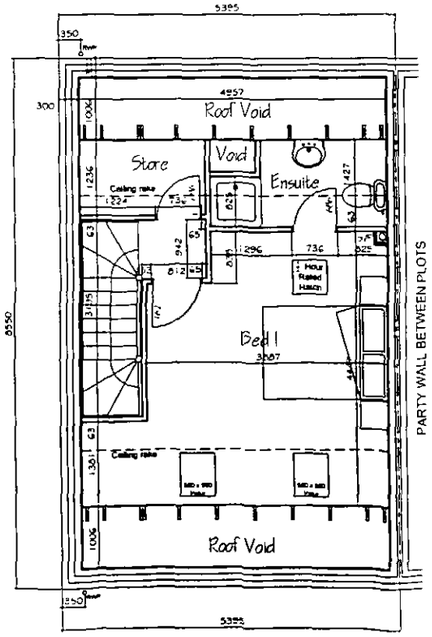

SECOND FLOOR PLAN

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE March 2010

DRG. No. Tc/Planning/09 | REV. -


SCALE: 1:100

Tresco Planning Layout


Tresco
2009 Housetype Range
977sqft/90.8sqm

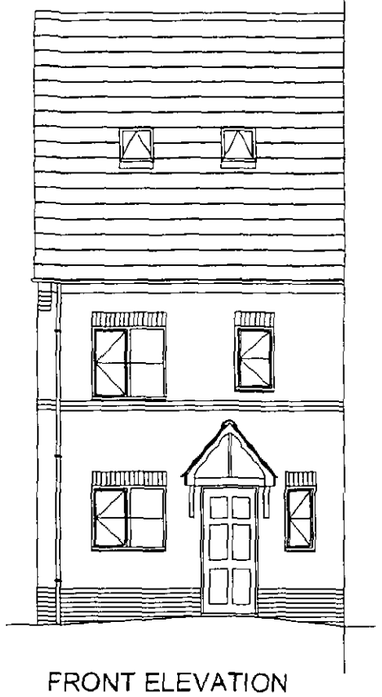

FRONT ELEVATION

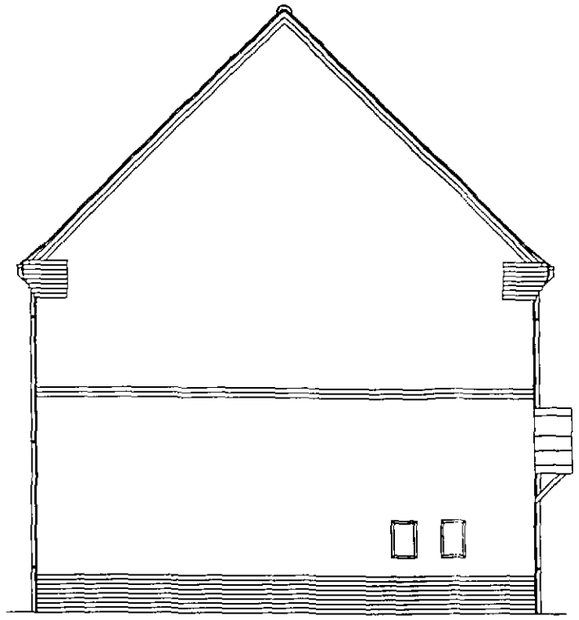

SIDE ELEVATION

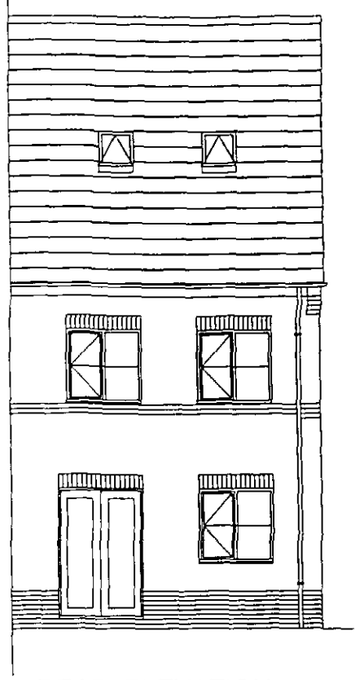

REAR ELEVATION

SEMI-DETACHED GROUND FLOOR PLAN

SEMI-DETACHED FIRST FLOOR PLAN

SEMI-DETACHED SECOND FLOOR PLAN

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE March 2010


DRG. No. Bf/Planning/09 REV. -


SCALE: 1:100

Bradford Planning Layout

Bradford
2009 Housetype Range
954sqft/88.6sqm

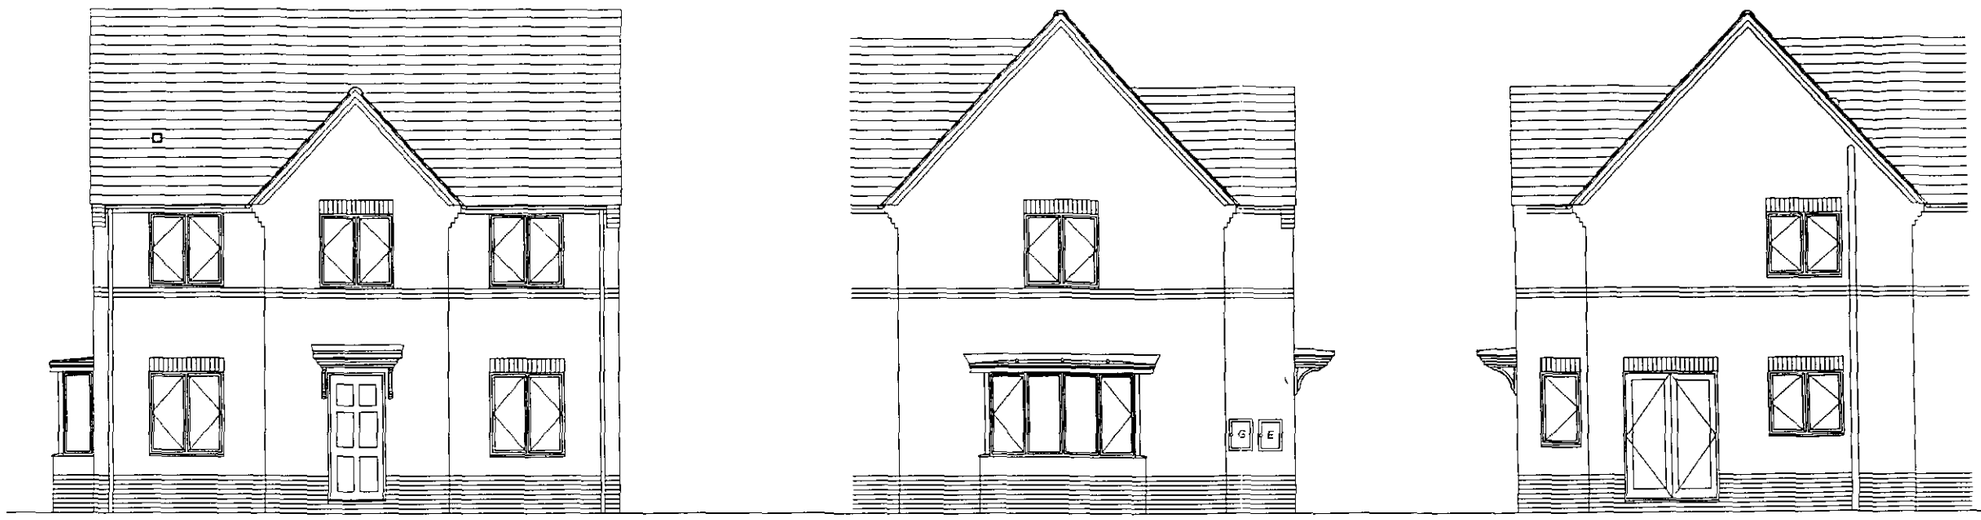

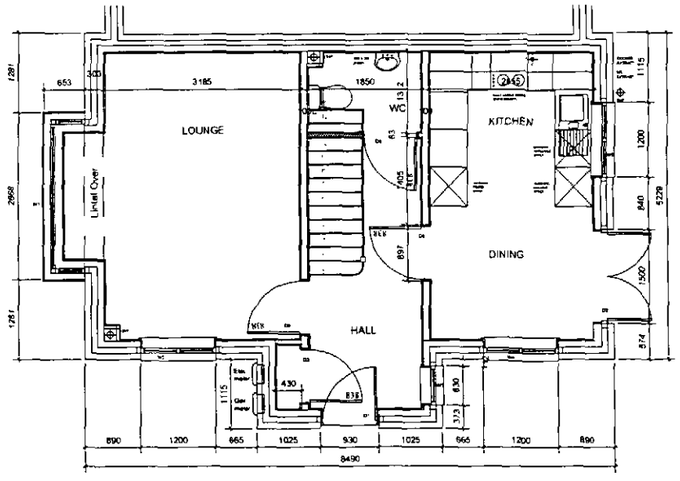

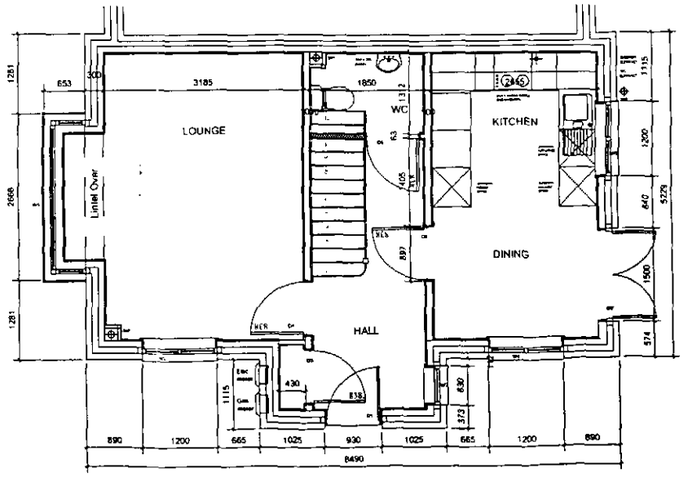

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN A.J.E	CHECKED	DATE March 201

DRG. No. Tr/Planning/09	REV. -

SCALE: 1:100

Tornado Planning Layout


Tornado
2009 Housetype Range
856sqft/79.5sqm

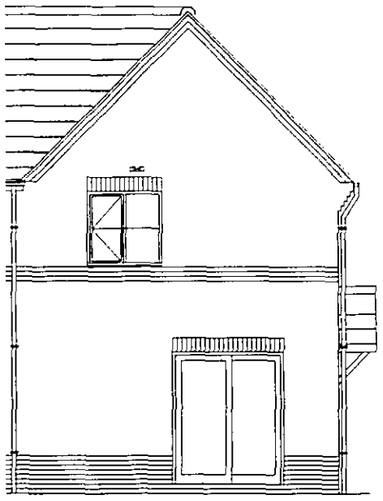


REAR ELEVATION




SIDE ELEVATION

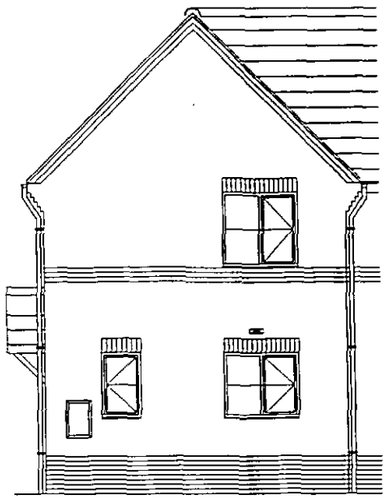

FRONT ELEVATION

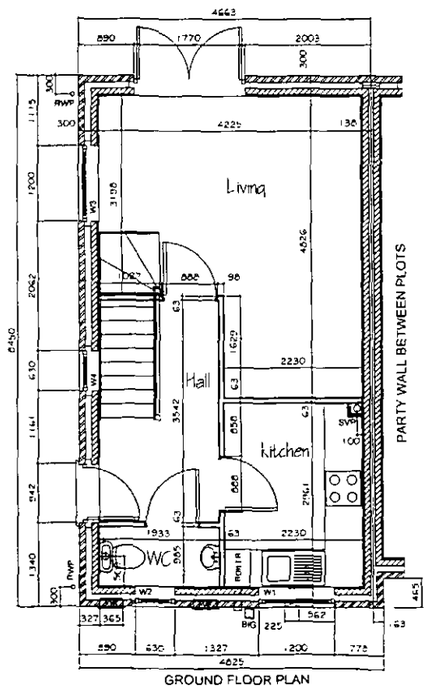

GROUND FLOOR PLAN

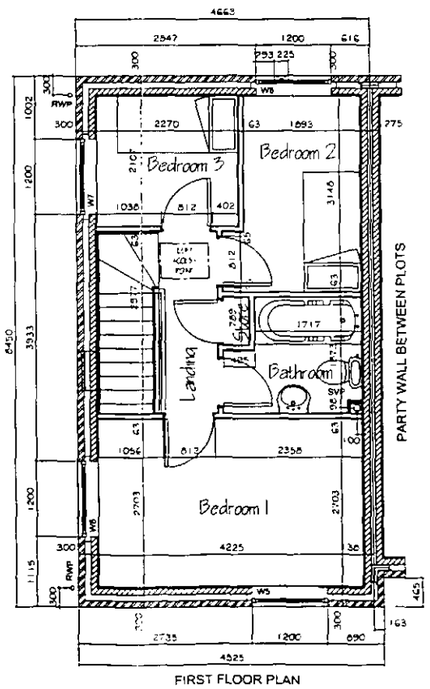

FIRST FLOOR PLAN

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN RB.	CHECKED	DATE March 2010

DRG. No. Ts/Planning/09	REV. -

SCALE: 1:100

Tempest Planning Layout


Tempest
2009 Housetype Range
701sqft/65.1sqm




FRONT ELEVATION



REAR ELEVATION

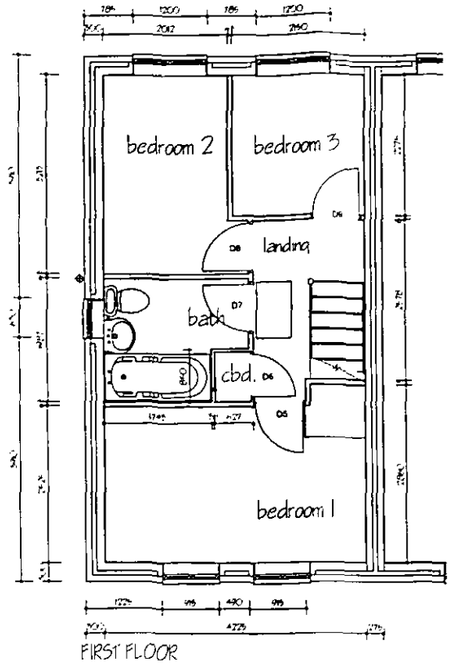


FIRST FLOOR

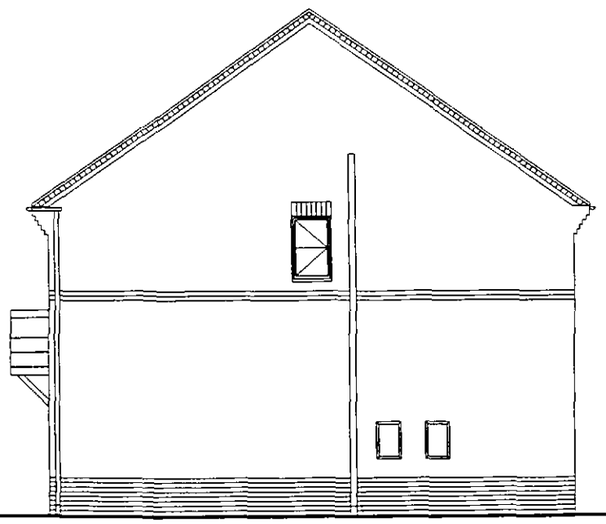

SIDE ELEVATION



ALTERNATIVE FRONT ELEVATION

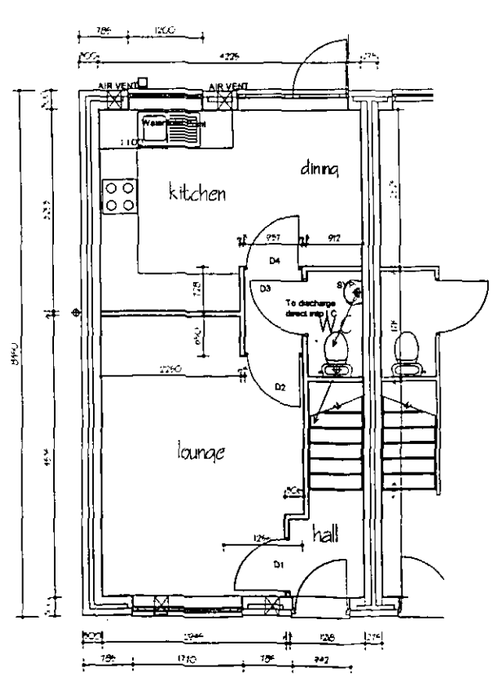

GROUND FLOOR

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES


DRAWN RB.	CHECKED	DATE March 201
DRG. No. Ww/Planning/09		REV. -
SCALE: 1:100		

Whitworth Planning Layout


Whitworth
2009 Housetype Range
706sqft/65.6sqm



FRONT ELEVATION

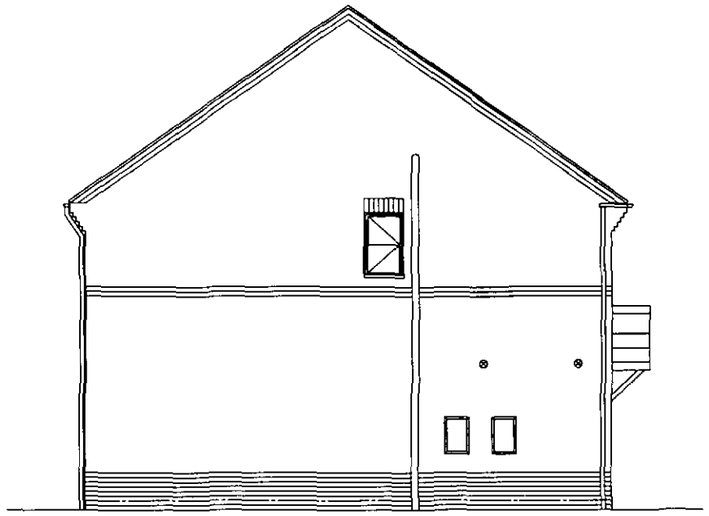


SIDE ELEVATION

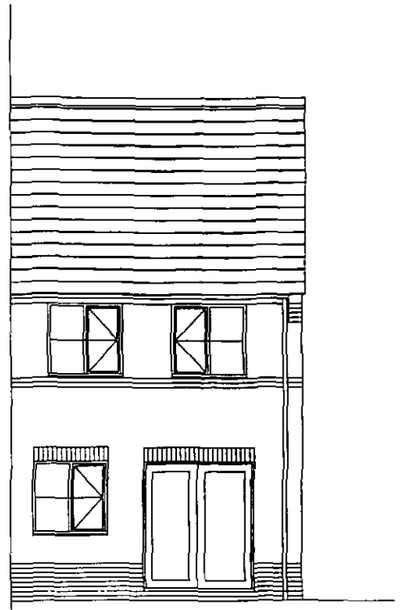


REAR ELEVATION



ALTERNATIVE FRONT ELEVATION

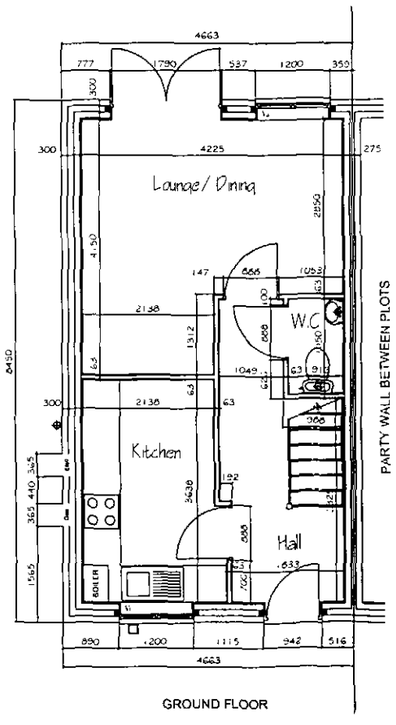

GROUND FLOOR

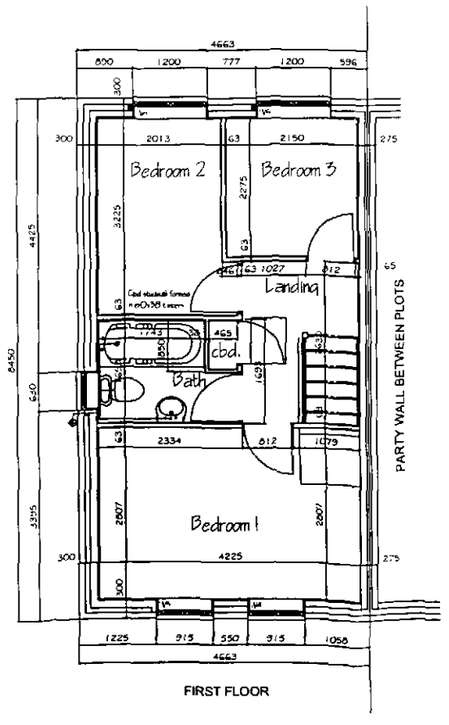

FIRST FLOOR

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN MW	CHECKED	DATE 03/03/10

DRG. No. Dv/Planning/09 REV.


SCALE: 1:100

Planning Drawing

Dove
2009 House Type Range
701sqft/65.1sqm



FRONT ELEVATION

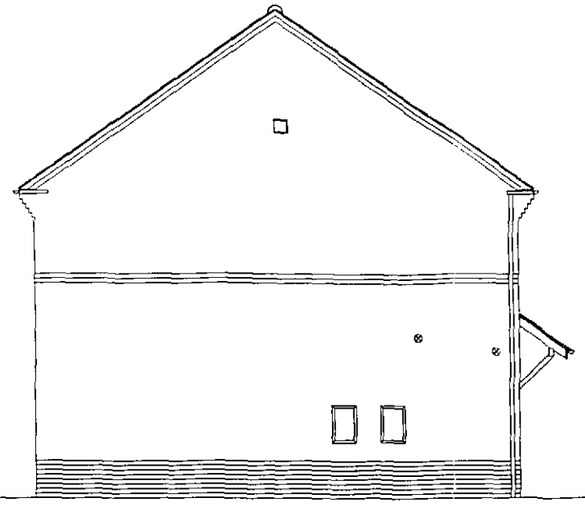


SIDE ELEVATION




REAR ELEVATION



ALTERNATIVE FRONT ELEVATION

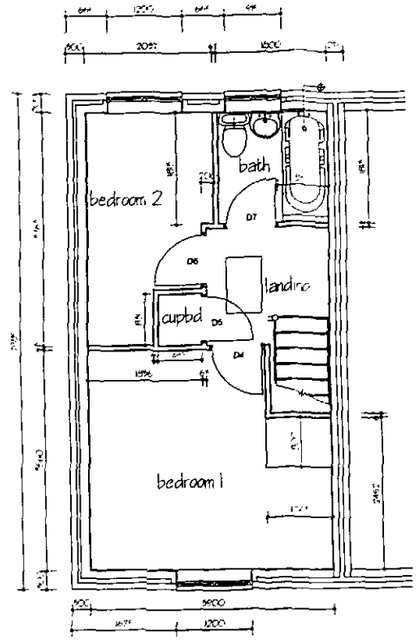

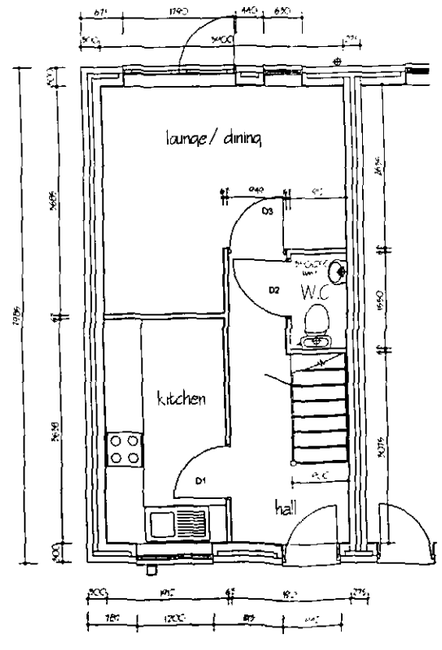

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN RB.	CHECKED	DATE March 201

DRG. No. Hc/Planning/09	REV. -


SCALE: 1:100

Hurricane Planning Layout


Hurricane
2009 Housetype Range
612sqft/56.9sqm




FRONT ELEVATION

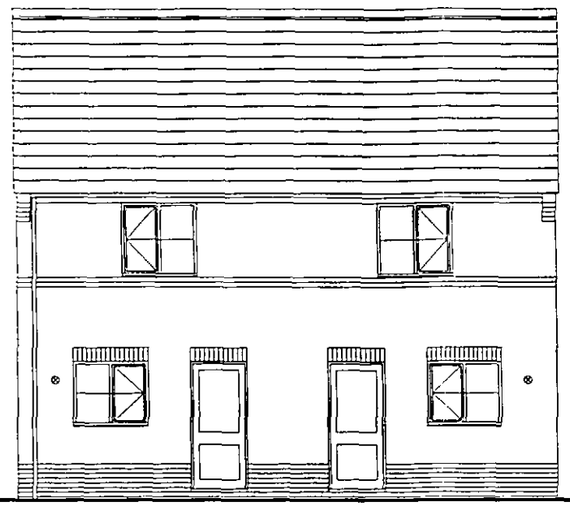

REAR ELEVATION

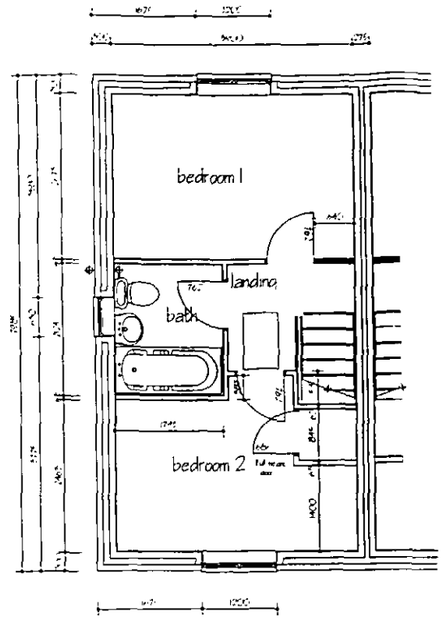


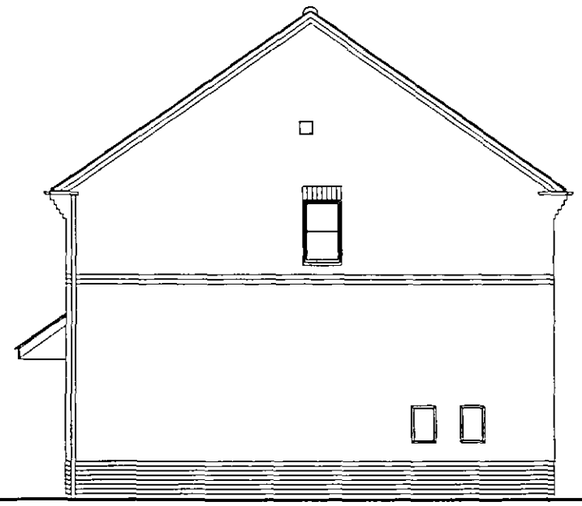

SIDE ELEVATION



ALTERNATIVE FRONT ELEVATION

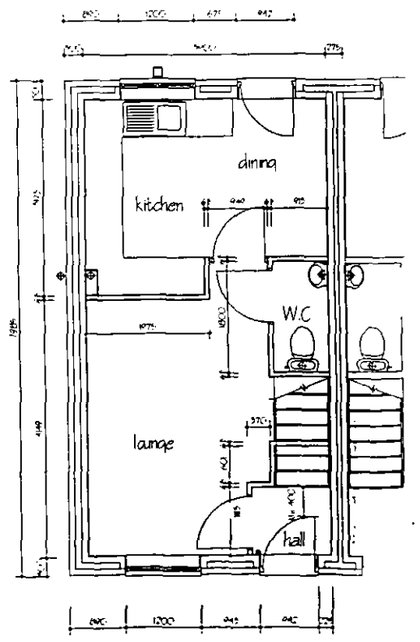

BenBailey HOMES

DATE	REVISIONS	BY

Ben Bailey Homes
First Floor
ICON
First Point
Balby Carr Bank
Doncaster
DN4 5JQ

BenBailey HOMES

DRAWN A.J.E	CHECKED	DATE 2010

DRG. No. Me/Planning/09 | REV. -

SCALE: NTS

Meteor Planning Layout

Meteor
2009 Housetype Range
609sqft/56.6sqm