


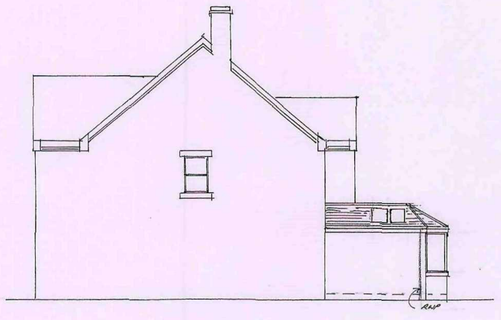


SIDE ELEVATION

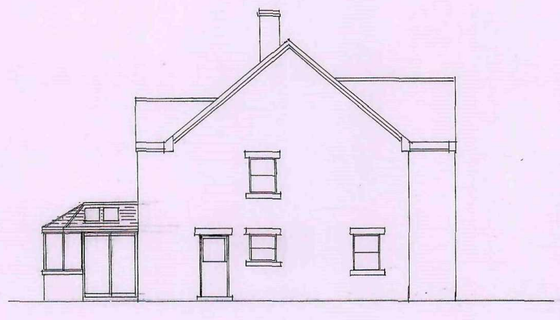


SIDE ELEVATION

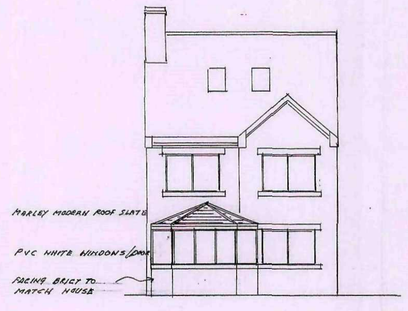


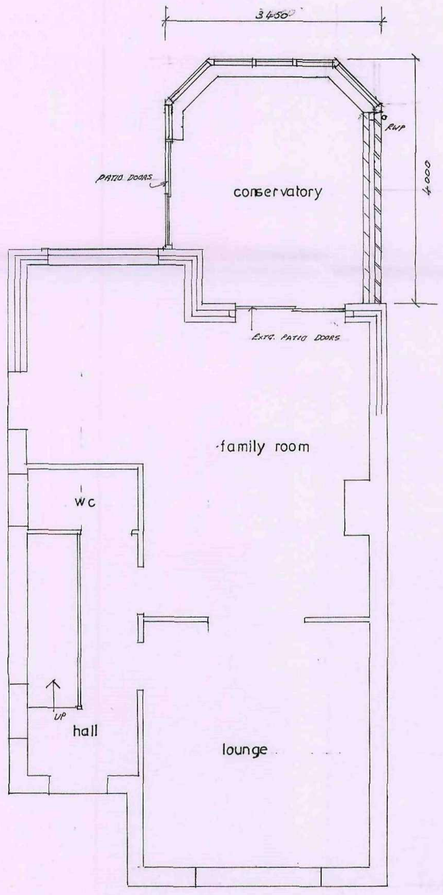


GROUND FLOOR PLAN

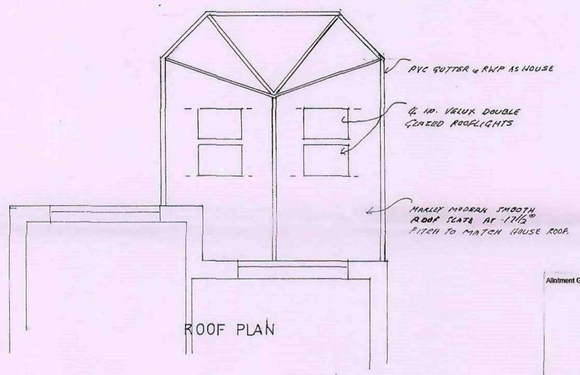

ROOF PLAN

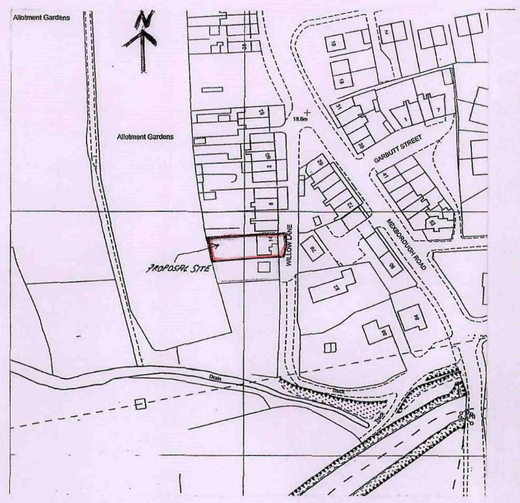

LOCATION PLAN Scale 1 . 1250

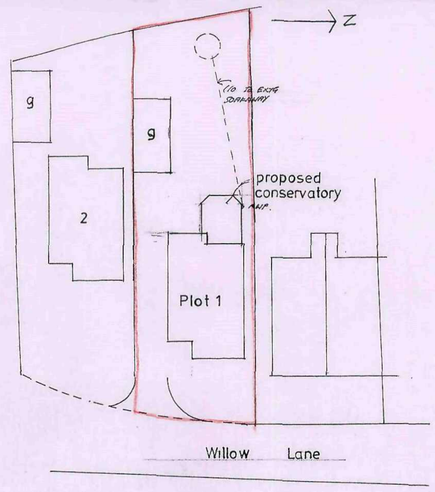

SITE PLAN Scale 1 . 250

PROPOSED CONSERVATORY at 14 Willow Lane
Bolton on Dearne Rotherham S63 8LU for Mr & Mrs K Buck


DRWG. NO. 735/1 General Arrangement Scale 1: 100 & 1: 50

Gordon Stephenson, Chartered Architect. R.I.B.A.
10 Parkwood Rise, Barnby Dun, Doncaster DN3 1LY


email stevenson_g3@sky.com Tel 01302 891411




front elevation

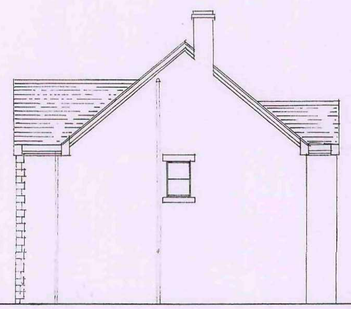


side (north) elevation




side elevation





rear elevation

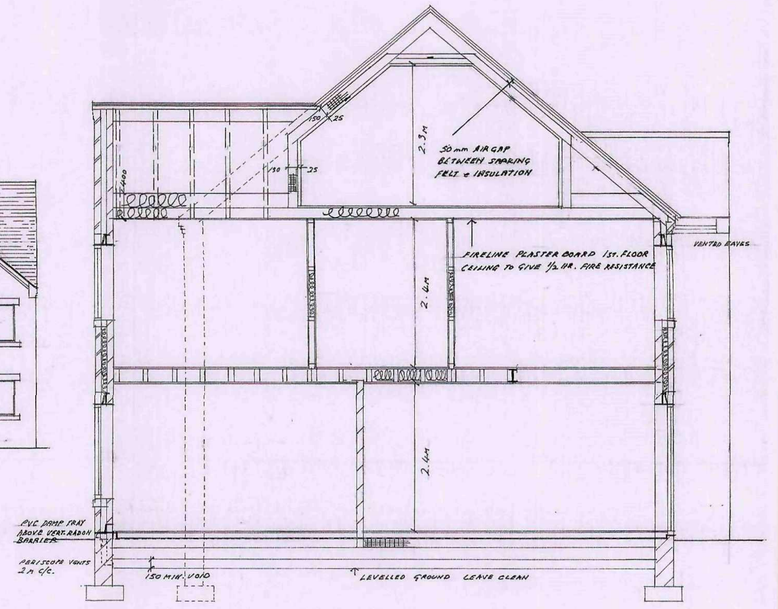

SECTION A-A

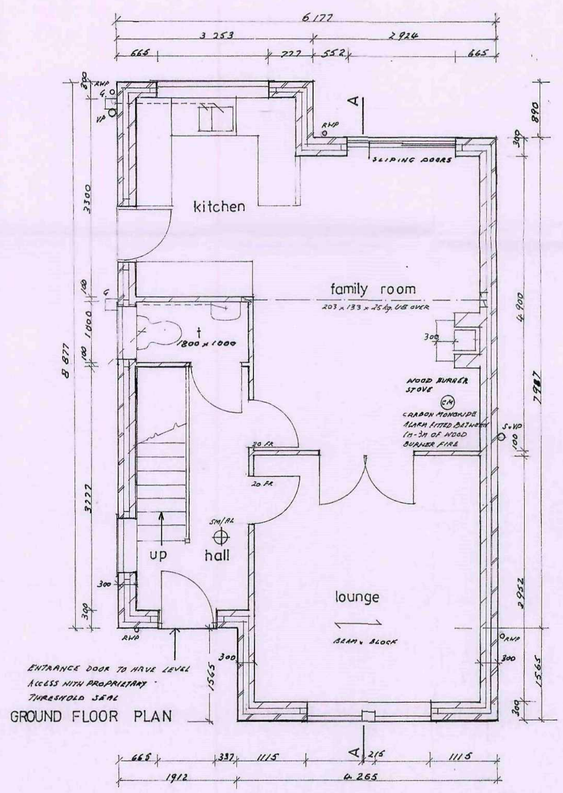

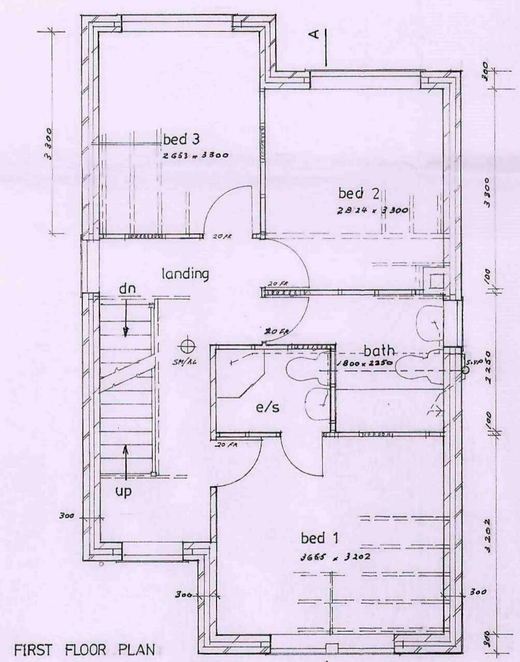

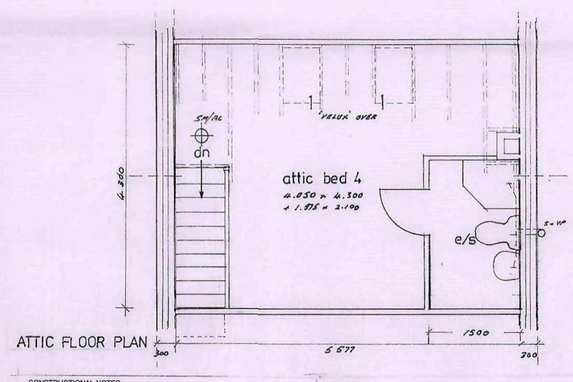

AMENDMENTS		
DATE	No	DESCRIPTION
19.4.11	A	ROOF QUOINS TO FRONT ELEVATION ADD CONSTRUCTION DETAILS ADD WOOD BURNING STOVE & STACK
25.5.11	B	AMENDMENTS FOR BUILDING REGS.

ROOF
GRAPHITE BRITLOCK SLATE ON 50 X 25 T.AN. S/W BATTENS ON BREATHABLE SARKING MEMBRANE. TRUSSED RAFTERS AT 600 C/C TO MANUFACTURERS CALCULATIONS & BRACING DETAILS. 400MM MINERAL WOOL COLD ROOF 'U' VALUE 0.112W/M²K. WARM ROOF 150 KINGSPAN TP10 BETWEEN RAFTERS & 25 KINGSPAN TW56 BELOW INSULATION TO GIVE 'U' VALUE 0.151 W/M²K
100 X 50 WALLPLATE STRAPPED TO BLOCK 12.5 PLASTERBOARD & SKIM CEILING. 30 X 6 GALV. MS. RESTRAINT STRAPS FIXED TO BLOCKWORK & 3 MIN. TRUSSES AT 2M MAX C/C

LINTELS
CATNIC INSULATED LINTELS TO EXTERNAL WALLS TO MANUF. CALCS. & BEARING DETAILS
CATNIC TO MANUFACTURERS CALCS TO INTERNAL OPENINGS

ROOFLIGHTS
VELUX (MANUFACTURERS STATED 'U'VALUE 1.4W/M²K) FITTED IN STRICT ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS

VENTILATION
MECHANICAL VENT. TO GIVE 30 L/S TO KITCHEN & 15 L/S TO SHOWER ROOM, OPERATED BY LIGHTSWITCH WITH 15MIN. OVERRUN & 10 VENT GAP UNDER DOOR. BACKGROUND VENTILATION OF 60,000mm² FOR DESIGN AIR PERMEABILITY OVER 5m³/h.m² OR 8,000mm² FOR 10m³ DESIGN PERMEABILITY
LOFT HATCH
LOFT ACCESS IN ATTIC CEILING AREA TO BE FITTED WITH DRAUGHT SEAL & BOLT TO COMPRESS SEAL

AIR PERMEABILITY
DESIGN AIR PERMEABILITY 8M (10M) /HM SINGLE PRESSURE TEST TO CONFIRM

CALCULATIONS TO BE SUBMITTED FOR STEEL JOIST FLOOR SUPPORT

DWELLINGS TO CONFORM TO NHM PART G REQUIRMENTS
a) WATER EFFICIENCY CALCS. TO BE PROVIDED BEFORE COMPLETION
b) WHOLESOME WATER SUPPLY PROVIDED BY LOCAL WATER SUPPLY UNDERTAKER.
c) ALL BATHS TO BE FITTED WITH SUITABLE DEVICE TO LIMIT HOT WATER TEMPERATURE TO MAX. OF 48°C
d) HOT TAPS TO BE INSTALLED ON THE LEFT
e) A NOTICE CONFIRMING THE HOT WATER SYSTEM HAS BEEN PROPERLY COMMISSIONED & ISSUED BY A PERSON COMPETENT TO DO SO IS TO BE PROVIDED ON COMPLETION

A COPY OF YORKSHIRE WATER APPROVAL FOR THE DRAINAGE DISCHARGE TO BE SUBMITTED

CONSTRUCTIONAL NOTES

FOUNDATIONS
600 X 225 CONC. STRIP AT 1M EXCAVATED DEPTH BELOW GROUND TO EXTERNAL WALLS 450 X 225 CONCRETE STRIP TO INTERNAL WALLS, DEPTH TO SATISFY BUILDING INSPECTION

GROUND FLOOR
100 CONCRETE FLOOR SLAB WITH POWERFLOAT FINISH ON 1500G POLYTHENE DPM/RADON BARRIER ON 120MM RIGID 'PUR' FLOOR INSULATION
CONCRETE BEAM & BLOCK FLOOR TO MANUFACTURERS CALCS & DETAILS MAINTAIN 75MM MIN AIR SPACE BELOW FLOOR & CROSS VENTILATE WITH PROPRIETY WALL VENTS

EXTERNAL WALLS
102 FACING BRICK 100MM CAVITY FILLED 100MM URSA 32 CAVITY BATTS WITH 100MM THERMALITE TURBO BLOCK INNER LEAF FINISHED DOT & DAB PLASTERBOARD & SKIM TO GIVE 'U' VALUE 0.233W/M²K SS CAVITY TIES AT 450 VERTICAL & 750 HORIZONTAL C/C & EVERY BLOCK COURSE AT REVEALS. 7NMM2 BLOCK BELOW DPC
THERMOBATE CAVITY CLOSERS AT REVEALS & HEADS

LOFT WALLS TIMBER STUD WITH 150 KINGSPAN TP10 BETWEEN STUDS & 25MM KINGSPAN TW56 BELOW 'U' VALUE 0.151 W/M²K

INTERNAL WALLS
100 PLASMOR BLOCK WALLS PLASTERED BOTH SIDES. STUD FRAMING 75 X 50 STUDS AT MAX.600C/C WITH HORIZONTAL NOGGINGS AT MAX 1200 C/C 75MM MINERAL WOOL FILL & FINISHED PLASTERBOARD & SKIM BOTH SIDES

FIRST FLOOR
47 X 220 SC3 AT 450C/C 63 X 220 TRIMMERS, HERRINGBONE STRUTTING AT 1/3 SPANS 19 T &G CHIPBOARD TO BS 5669 TYPE 2/3, 12.5 PLASTERBOARD & SKIM CEILINGS 30 X 5 GALV. MS RESTRAINTS STRAPS AT 2M MAX. C/C FIXED TO WALL & 3 NO. JOISTS. 100MM MINERAL WOOL JOIST FILL. WHERE STUDS ARE PARALLEL TO SPAN USE 2NO. 47 X 220 AS SUPPORT

DPC & FLASHINGS
POLYTHENE WALL DPC 150 MIN. ABOVE FIN. GD. LEV. . LEAD FLASH UNDER AND OVER TILES AT ROOFLIGHTS & CHIMNEY STACK

DRAINAGE
110 DIAM PVC PIPES, 450 DIAM. PVC INSPECTION CHAMBERS 1M MAX DEEP. WHERE DRAINS PENETRATE WALLS BRIDGE OVER. FOUL DRAIN TO EXISTING IC IN ADJACENT ROAD & SUBJECT TO WATER TEST. WHERE DRAINS HAVE LESS THAN 600MM COVER SURROUND 100MM CONCRETE
SURFACE WATER DRAINS TO SOAKAWAY IN GARDEN AREAS MIN. 5M FROM ANY BUILDING. SOAKAWAY TESTS CARRIED OUT PRIOR TO CONSTRUCTION

WINDOWS
UPVC WINDOWS/ ENTRANCE DOOR. DOUBLE GLAZING 16MM ARGON FILLED GAP, SOFT LOW E COATING TO INNER PANE 'U' VALUE 1.6 W/M²K
DOORS PART GLAZED AS ABOVE MAX. 'U' VALUE 1.9 W/M²K
GLAZING WITHIN 800 OF FLOOR & ALL GLAZING TO DOORS AND ADJACENT WINDOWS TO BE TOUGHENED TO BS. 6206 (1981)
VENT SLOTS IN WINDOW HEADS TO GIVE 8000MM2 TO HABITABLE ROOMS

DOORS
EXTERNAL DOORS & MAIN INTERNAL GROUND FLOOR DOORS TO GIVE 800MM CLEAR OPENING WIDTH, FIRST FLOOR DOORS 762MM TO GIVE 700MM CLEAR OPENING. SELF CLOSING 20MIN. F.R. DOORS TO DOORS FROM HALL OR LANDINGS. ENTRANCE DOOR TO HAVE LEVEL THRESHOLD WITH PROPRIETARY RUBBER SEAL

STAIRCASE
13 NO. RISERS 203MM GOING 225MM PITCH LESS THAN 42 DEGREES 900MM CLEAR WIDTH WITH HANDRAILS 900MM ABOVE PITCH LINE
BALUSTRADES IM HIGH AND NOT TO ALLOW 100DIAM. SPHERE TO PASS & UNCLIMBABLE

PLUMBING
PVC WASTE PIPES, 40MM DIAM. TO SINKS SHOWER & BASINS
75 RESEALING TRAPS TO ALL APPLIANCES. 100 DIAM. SOIL & VENT PIPE WITH TERMINAL 900 MIN. ABOVE ANY ADJACENT OPENING LIGHT.
UPVC RWPS & GUTTERS, 125 GUTTER WITH 75 DIAM. OUTLETS & 65 DIAM RWP'S


HEATING
GAS FIRED BALANCED FLUE CONDENSING COMBI BOILER WORCESTER GREENSTAR 25CDI SERVING TRADITIONAL STEEL RADIATORS
ROOM THERMOSTATIC CONTROL VALVES TO ALL RADIATORS . MIN 2 PROGRAMMABLE ZONES PIPEWORK INSULATED. PROVIDE COMMISSIONING PLATES ADJACENT TO APPLIANCES
COMMISSIONING CERTIFICATE TO BE PROVIDED

SECONDARY HEATING FROM WOOD BURNING STOVE CLOSED FRONT TYPE (HETAS APPROVED) 300MM MIN HEARTH PROJECTION IN FRONT OF APPLIANCE & 250MM AT EDGE WITH CLEARLY MARKED PERIMETER
MASONRY CHIMNEY WITH 200MM CLAY OR CONCRETE LINERS TO MEET THE REQUIREMENTS OF BS EN 1443 :1999

ELECTRICAL
MAINS OPERATED SELF CONTAINED INTERCONNECTED SMOKE ALARM FIXED TO CEILING 300 MIN. FROM ANY LIGHT FITTING. ALL NOTIFIABLE ELECTRICAL WORK IS REQUIRED TO MEET THE REQUIREMENTS OF PART P (ELECTRICAL SAFETY) & MUST BE DESIGNED, INSTALLED, INSPECTED & TESTED BY A PERSON COMPETENT TO DO SO. ENERGY EFFICIENCY LIGHTING TO ALL FITTINGS.
ALL SWITCHES TO BE BETWEEN 450 & 1200 ABOVE FLOOR
ALL INTERNAL LIGHTING TO HAVE FITTINGS WHICH ONLY TAKE LAMPS HAVING A LUMINOUS EFFICACY GREATER THAN 45 LUMENS PER CIRCUIT-WATT AND A TOTAL OUTPUT GREATER THAN 400 LAMP LUMENS

Materials

Walls	Red multicolour facing brick
Roof	Britlock graphite slate
Windows	upvc art-stone heads & sills
Rw.sps	Black upvc

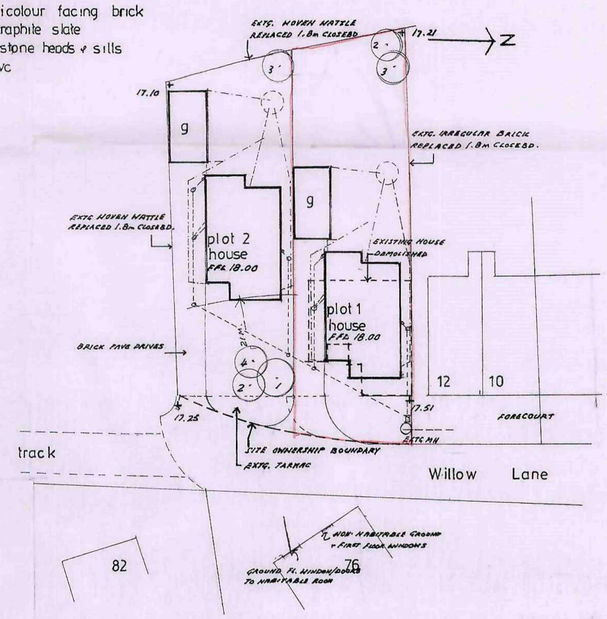

SITE PLAN Scale 1 : 250

KEY TO TREES			
1	HOLLY	ILEX AQUIFOLIUM
2	AUTUMN CHERRY	PRUNUS x AUTUMNALIS
3	WHITE MULBERRY	MORUS ALBA
4	TRANSCAUCASIAN BIRCH	BETULA MEDWEDIEWII

K BUCK
Building Contractor
26 Angel Street
Bolton upon Dearne
Rotherham S63 8NA

PROPOSED RESIDENTIAL DEVELOPMENT at
14 WILLOW LANE
BOLTON UPON DEARNE
ROTHERHAM S63 8LU

DEMOLITION OF 14 WILLOW LANE AND SUBSTITUTION OF 2 NO. 4 BEDROOM DETACHED HOUSES WITH SINGLE GARAGES

SCALES 1:50 & 1:100 DRWG. NO. 714/1 A R

Gordon Stephenson, Chartered Architect, RIBA
10 Parkwood Rise Barnby Dun Doncaster DN31LY

Tel 01302891411 email stevenson_g3@sky.com Feb. 2011