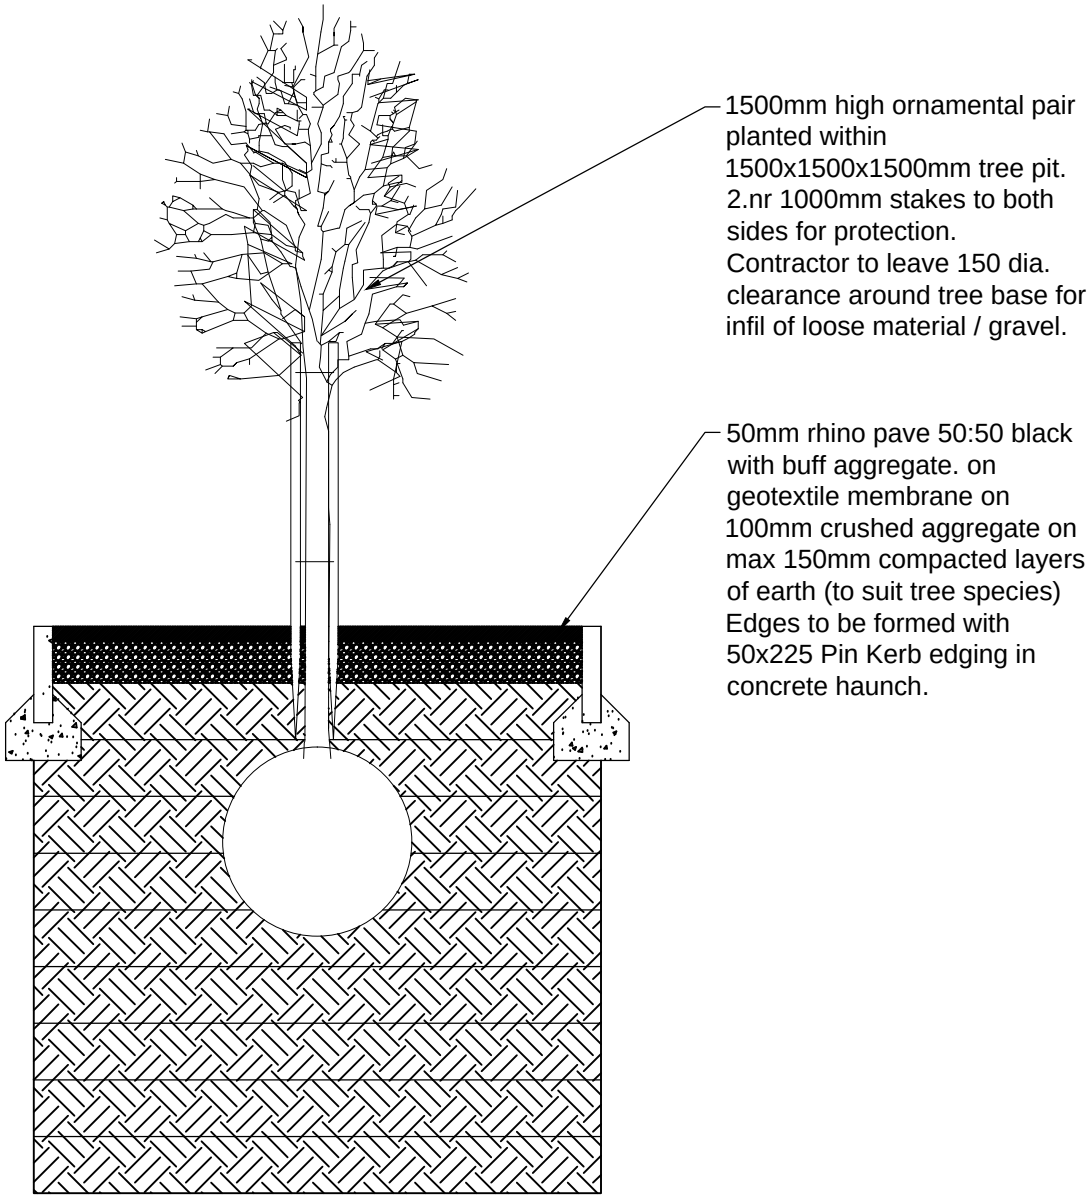


1500mm high ornamental pair planted within 1500x1500x1500mm tree pit. 2.nr 1000mm stakes to both sides for protection. Contractor to leave 150 dia. clearance around tree base for infil of loose material / gravel.

50mm rhino pave 50:50 black with buff aggregate. on geotextile membrane on 100mm crushed aggregate on max 150mm compacted layers of earth (to suit tree species) Edges to be formed with 50x225 Pin Kerb edging in concrete haunch.

Project No.
16-1-1205

Drawing Name
NPS-DR-A 700
Proposed Tree Pit