

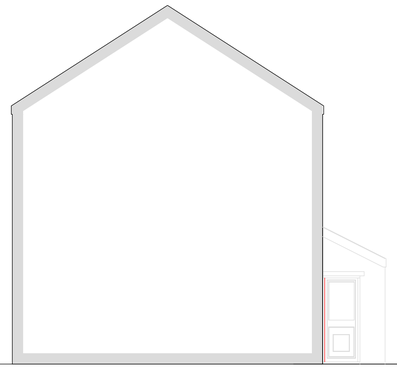



EXISTING LEFT SIDE ELEVATION (1:50)
(AS VIEWED FROM FRONT)

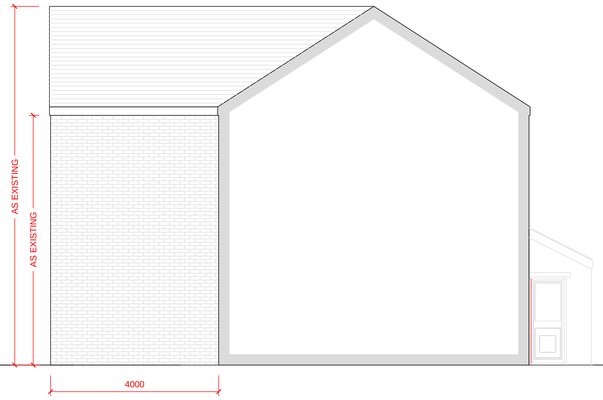


PROPOSED LEFT SIDE ELEVATION (1:50)
(AS VIEWED FROM FRONT)

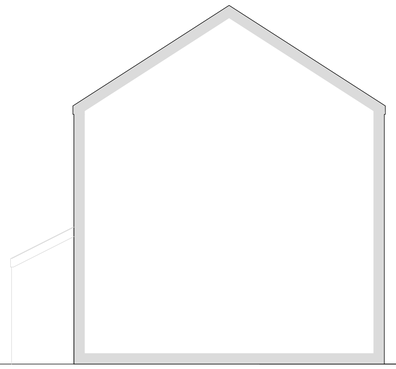


EXISTING RIGHT SIDE ELEVATION (1:50)
(AS VIEWED FROM FRONT)

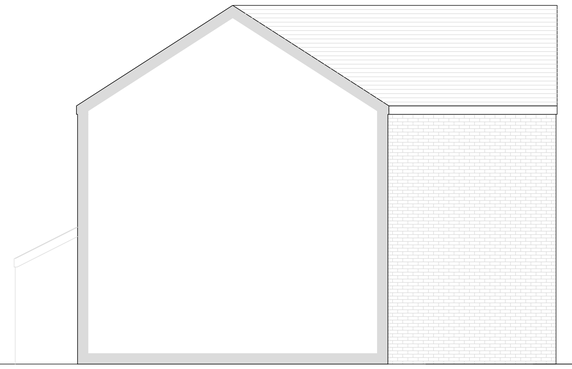


PROPOSED RIGHT SIDE ELEVATION (1:50)
(AS VIEWED FROM FRONT)

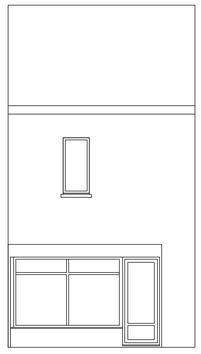

EXISTING REAR ELEVATION (1:50)

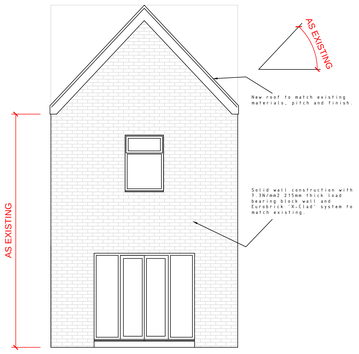

PROPOSED REAR ELEVATION (1:50)

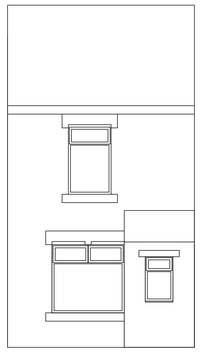


EXISTING FRONT ELEVATION (1:50)




PROPOSED SITE LOCATION PLAN (1:1250)




PROPOSED SITE BLOCK PLAN (1:500)

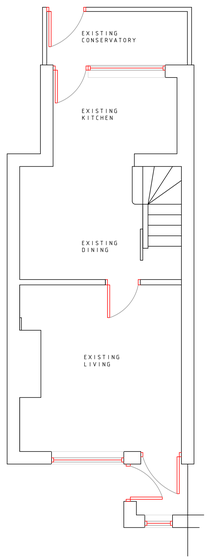


EXISTING GROUND FLOOR PLAN (1:50)

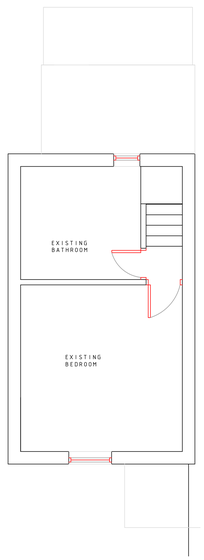


EXISTING FIRST FLOOR PLAN (1:50)

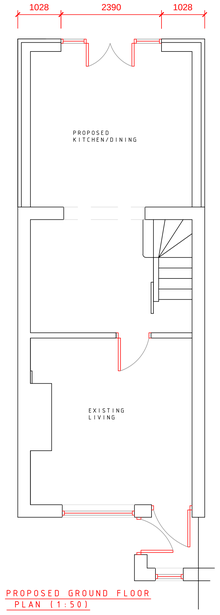

PROPOSED GROUND FLOOR PLAN (1:50)

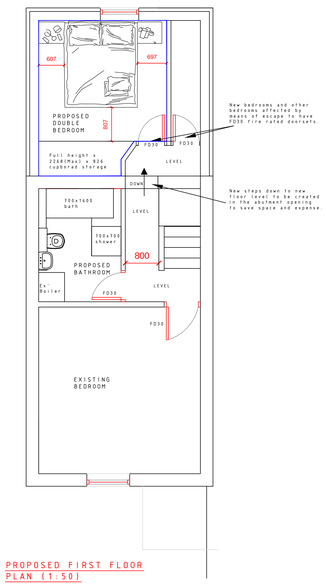

PROPOSED FIRST FLOOR PLAN (1:50)

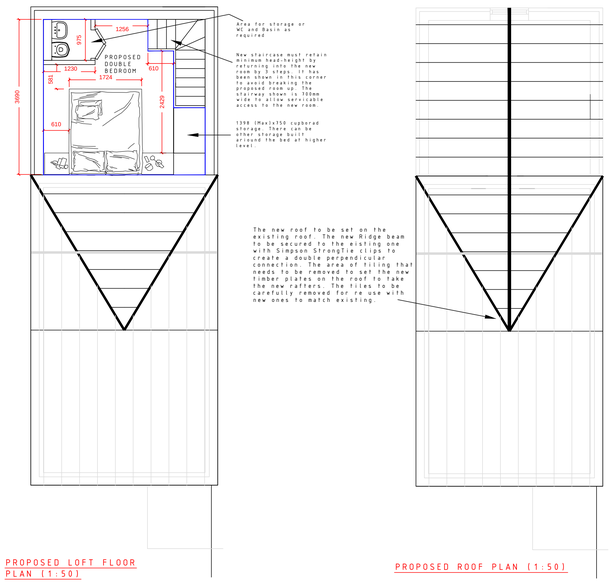

PROPOSED LOFT FLOOR PLAN (1:50)

PROPOSED ROOF PLAN (1:50)

NOTES

Contractor to check all services on site prior to any commencement of the works. Any necessary drain or sewer relocation to be checked, quoted and advised on before commencement of any works.

Contractor to read drawing in conjunction with all other contract documentation and report any queries to James Young asap and before work commences.

All new hot and cold water installations, including alterations to existing installations, are to comply with the current Bye-laws and the ACOP L8 for Legionella.

All new electrical installations, including alterations to existing installations, are to comply with the current IEE Regulations 17th edition and to meet the requirements of PART P (Electrical Safety) of the Building Regulations. All work must be installed, inspected and tested by a person competant to do so. The contractor / builder will be required to provide an appropriate BS 7671:2008 Amendment 2:2013. electrical installation certificate for the works, issued by a competant person to do so.

All new gas heating installations, including alterations to existing installations, are to be carried out by a CORGI or OFTEC registered engineer and are to meet the requirements of the latest version of the Building Regulations PART L1 (Conservation of fuel and power) of the Building Regulations. All work must be installed, inspected and tested by a CORGI or OFTEC registered engineer. The contractor / builder will be required to notify building control of the works to be undertaken and provide an appropriate 'Building Regulation Compliance Certificate' detailing works undertaken and registration details of the approved installation contractor.

Any reference given to a manufactured / named product should be read in the context of it being fixed / fitted in complete and strict accordance with the manufacturers latest and relevant fitting / fixing instructions and recommendations including any additional fittings or fixings as required unless otherwise detailed on the drawings.

All new drainage and sewer runs to be Hepworth 'Supersleve' clay sewers to BS EN 295-1: 2013 and BS EN 1610:1998.

Supersleve housedrain 100 and Supersleve 150 to be fitted in strict accordance with the manufacturers relevant and latest fitting instructions / recommendations using all materials as specified therein.

All dimensions are to be checked on site. Do not scale off of the drawing as this has been copied via a third party. Only work to stated dimensions after checking their validity. IF IN DOUBT - ASK

Chartered Institute of Architectural Technologists

PRODESCON
PROFESSIONAL BUILDING DESIGN
James Young
MIAT, MCIOB, MCIAT, MAE, MIABC
Tel: 07763 818706
e: james@prodescon.co.uk W: www.prodescon.co.uk

CIOB
THE CHARTERED INSTITUTE OF BUILDING

Revision:
A: Address corrected to be 18 Clumber Street.

JMY 29.10.2014

Project:

Proposed Extension to
18 Clumber Street,
Barnsley, S75 2DE.

Title:
Plans and Elevations

Drawn:

James Young

Scale:
Varies

Drawing No':

CS001A

Oct 2014

Xrefs: