


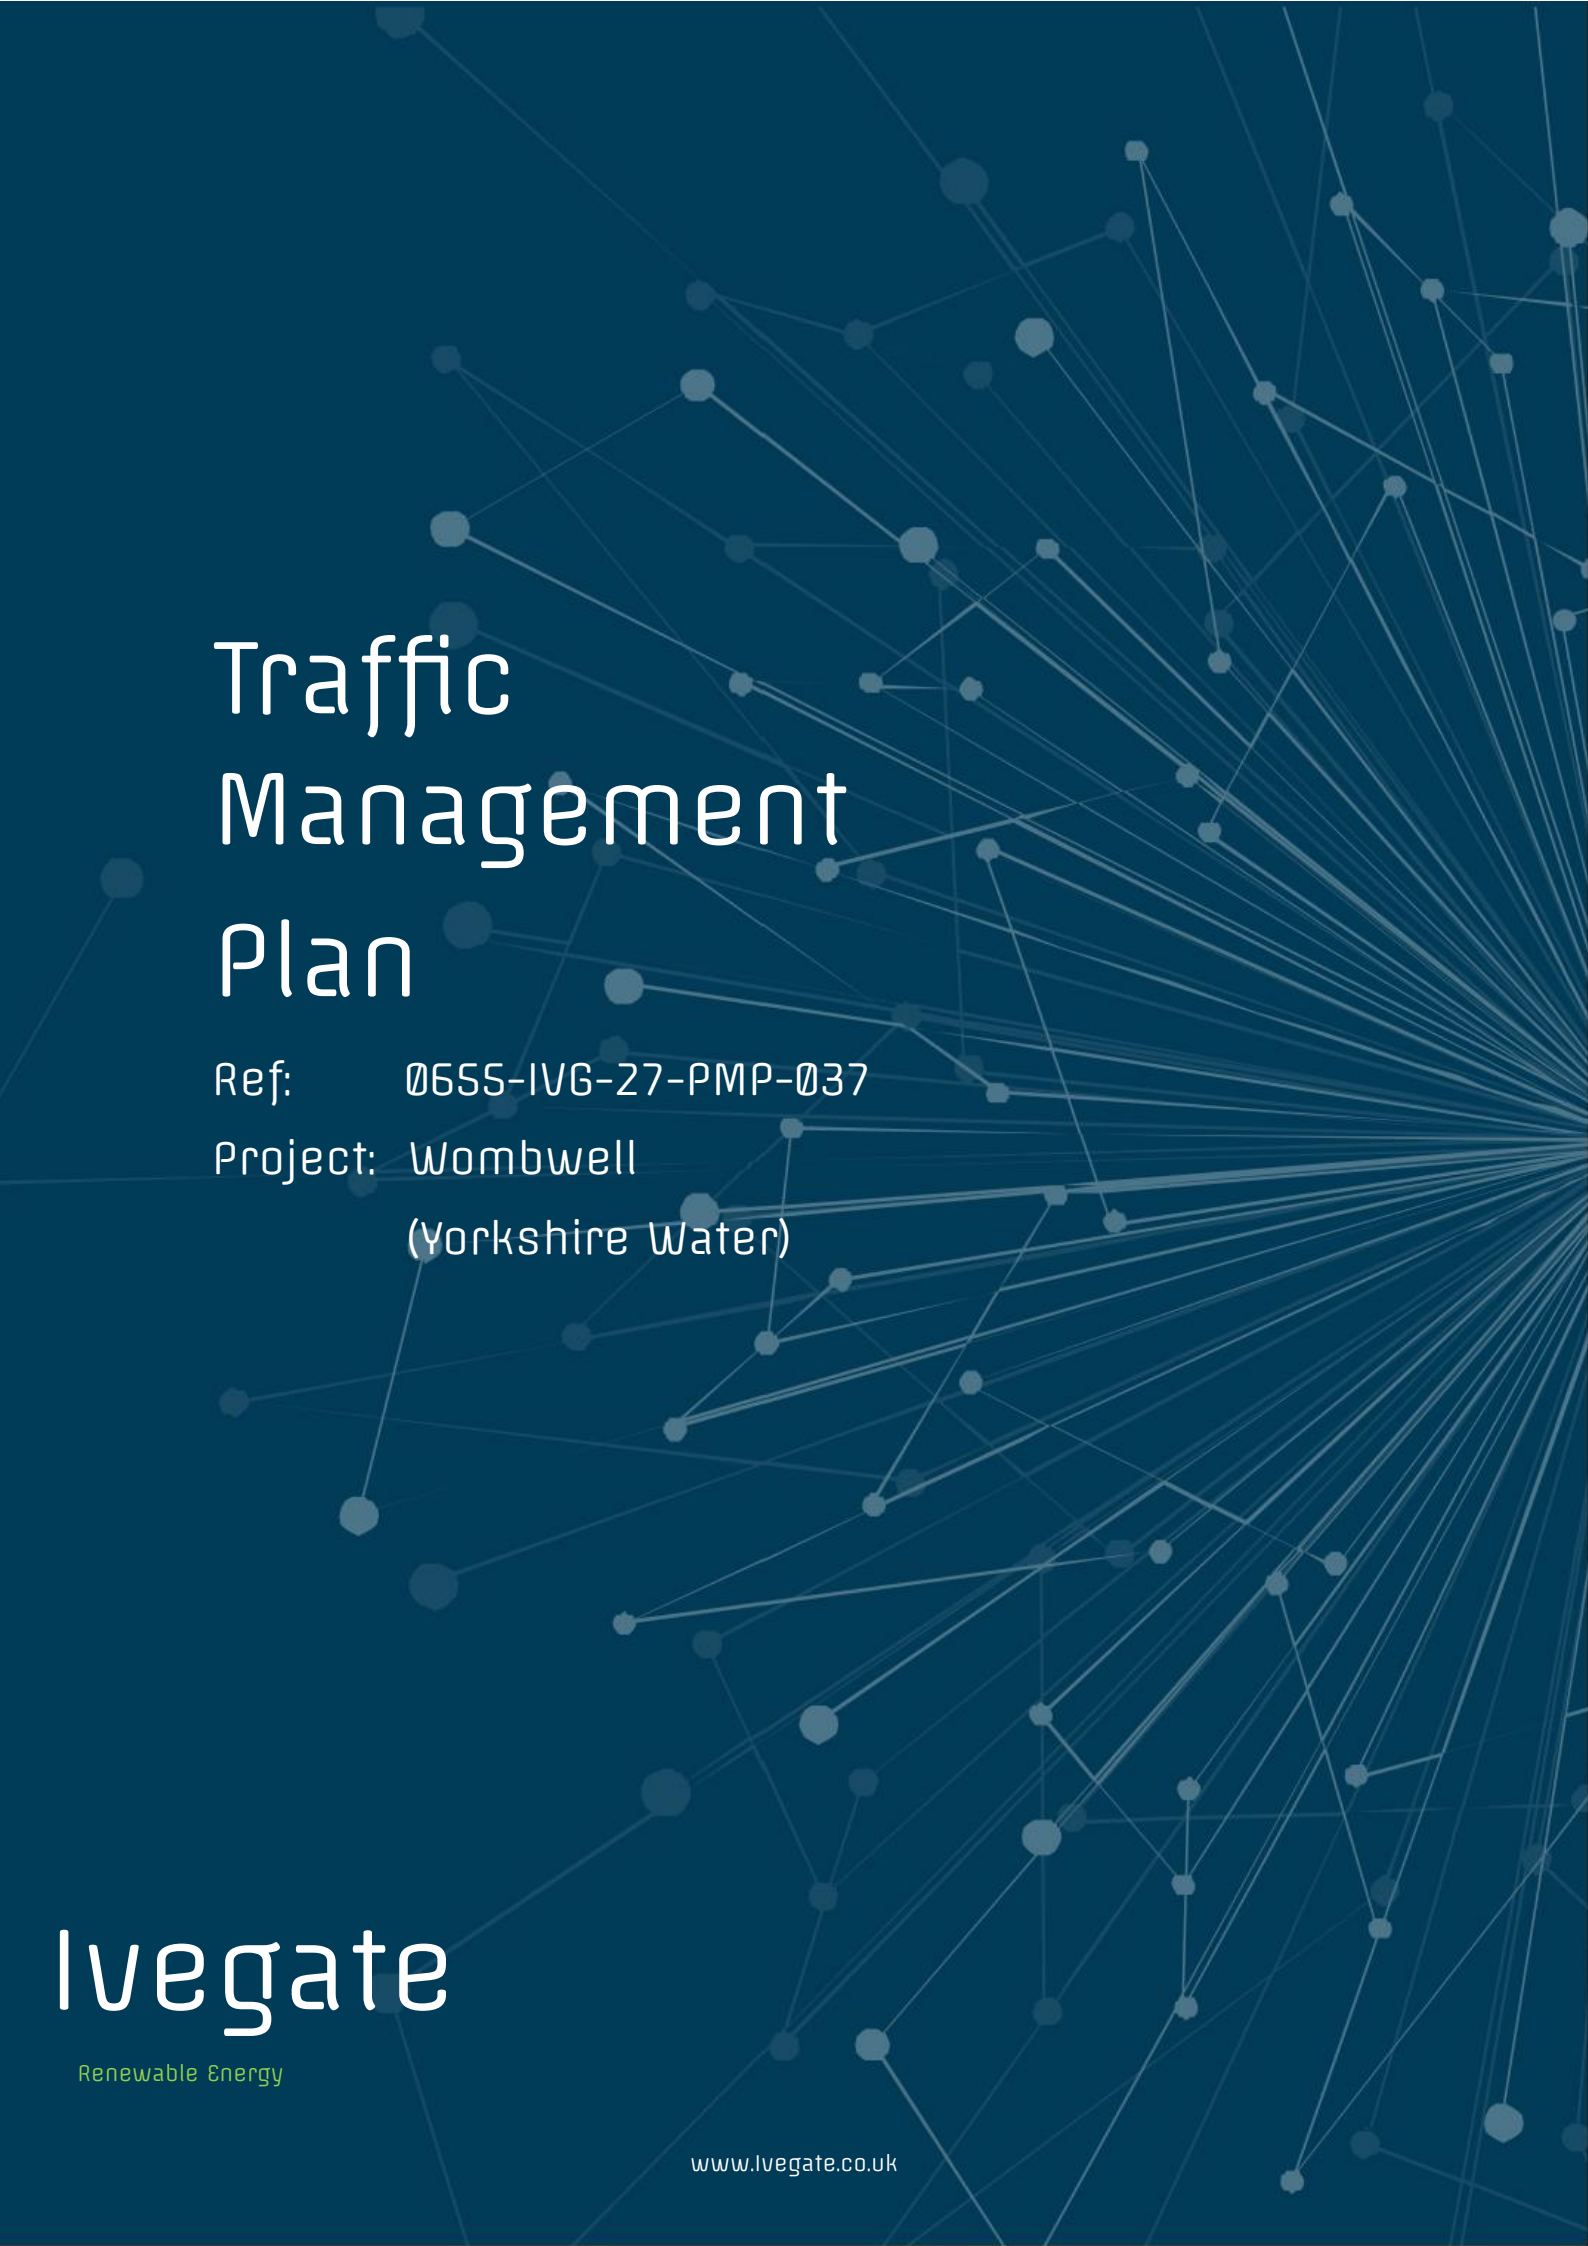

Traffic Management Plan

Ref: 0655-IVG-27-PMP-037

Project: Wombwell
(Yorkshire Water)


Ivegate

Renewable Energy


www.ivegate.co.uk

DESIGN:

The traffic management strategy for this project is one of minimising the interface wherever possible between the public, construction site traffic and the operational requirements of the site. The strategy is also to reduce the number of deliveries where practicable, including the staging of deliveries such that the volume of traffic is kept as low as possible avoiding peaks, and controlling vehicle movements on the project.

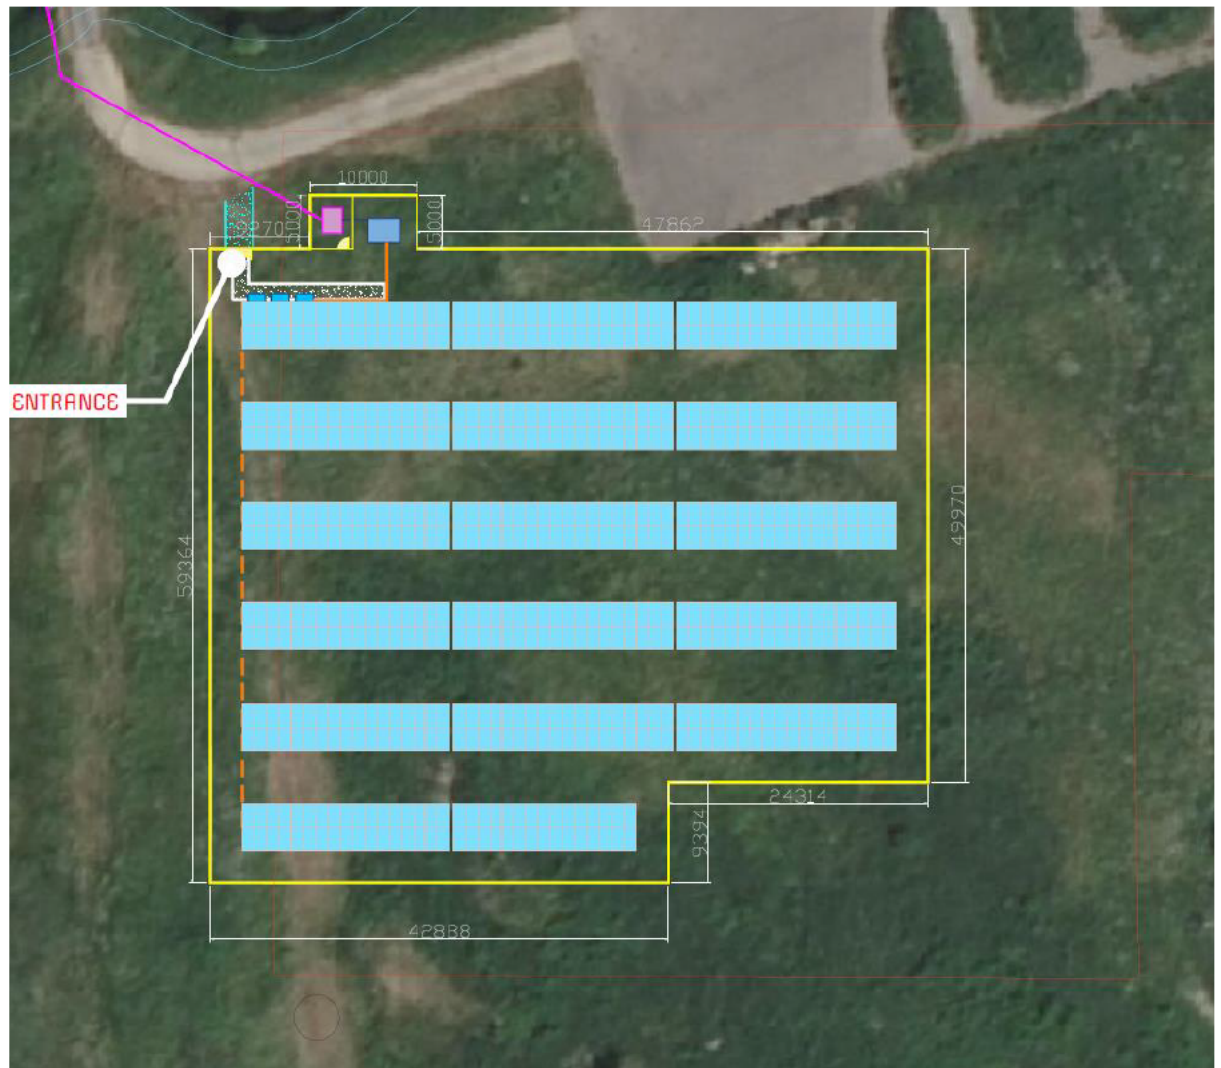

LOCATION IN
YORKSHIRE WATER
SITE:

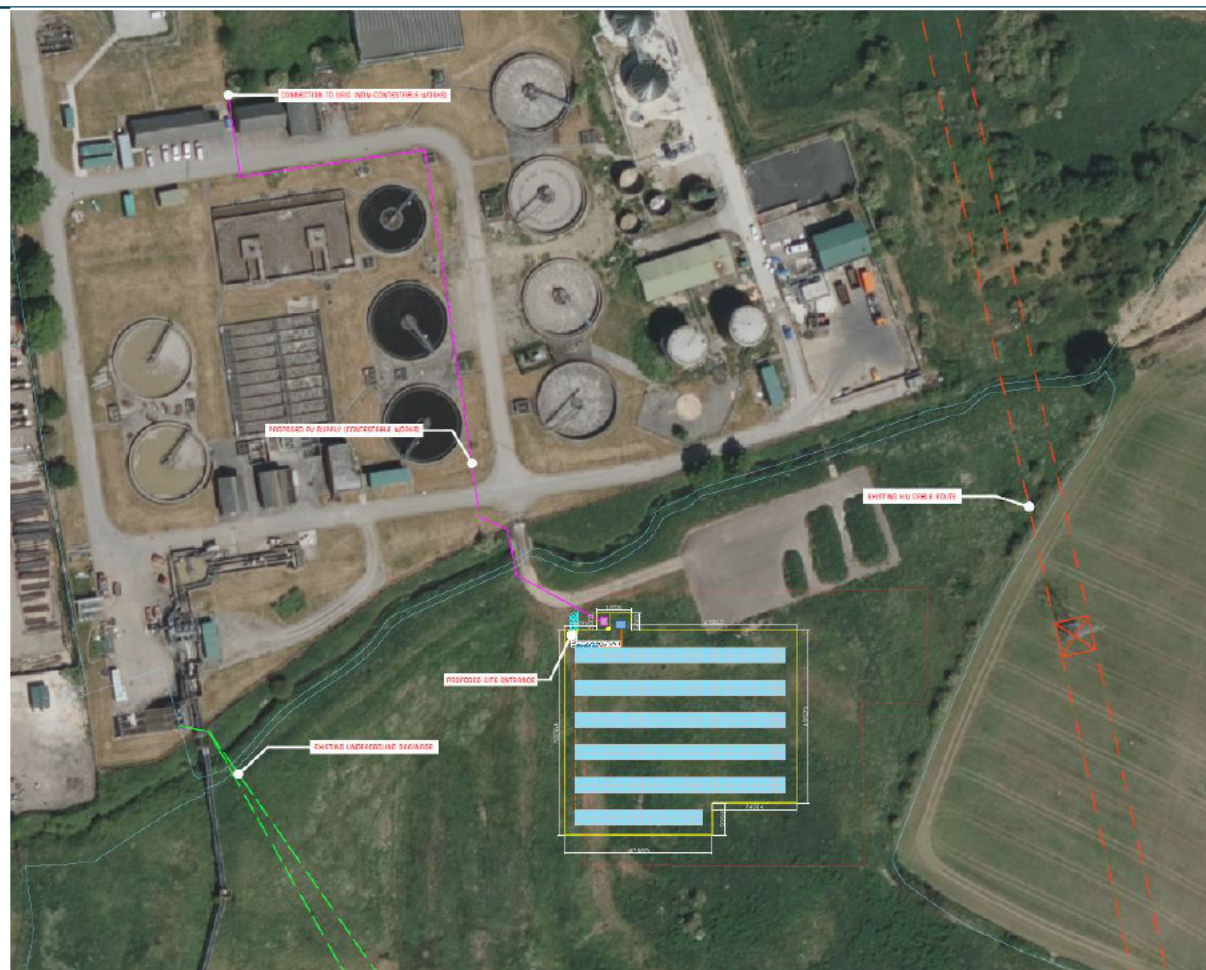

DOCUMENT DATE:

18/01/2024

CLIENT:
PREMISES
OCCUPIER:
PRINCIPAL
DESIGNER:
PRINCIPAL
CONTRACTOR:

COMPANY:	CONTACT:	TEL:	EMAIL:
Downing	Ameet Juttla		
Yorkshire Water	Vikki Overend		
Cubis	Graham MacAlpine		
Ivegate	Lee Ashley		

ACCESS TO THE SITE

DELIVERY
MOVEMENT PLAN TO
THE SITE:



ACCESS
IMMEDIATELY TO
THE SITE:



ACCESS THROUGH YORKSHIRE WATER GATES:



PHOTO OF TURNING CIRCLES FOR VEHICLES IN THE COMPOUND:



PLANNED LOGISTICS:

The site hours are Monday to Friday: 08:00 to 16:00 Monday-Friday. No work or deliveries shall take place outside of these hours. Deliveries will be scheduled and arranged accordingly to prevent any inconvenience as far as it is reasonably practicable to residents living in close proximity to the works and other road users, along Ings Road.

EXPECTED LOGISTICS SCHEDULE:

- Welfare delivery - 1 vehicle for 1 day (week 1) – Delivered by 4x4 towing the units.
- Plant delivery - 2 vehicles for 1 day (week 1) – 1 low loader with all equipment (9mx2.9 Ht 3m)
- Cable delivery - 1 vehicle for 1 day (week 1) - Delivered by 26ton rigid vehicle (7.6x2.5 Ht 3.5m)
- Construction materials - 2 vehicles for 2 days (week 1/2) Delivered by 26ton rigid vehicle (7.6x2.5 Ht 3.5m)
- Frame delivery - 1 vehicles for 1 day (week 1/2) Delivered by 26ton rigid vehicle (7.6x2.5 Ht 3.5m)
- Panel delivery - 1 vehicle for 1 day (week 2/4) – Delivered by 26ton rigid vehicle (7.6x2.5 Ht 3.5m)
- Skip delivery – 1 vehicle for 1 day (week 1) – Delivered by rigid (4.27x2.5 Ht 3.68m)
- Plant collection - 2 vehicles for 1 day (week 6)
- Welfare collection - 1 vehicle for 1 day (week 6)
- Waste removal – 1 vehicle for 1 day (week 6)

DELIVERING VEHICLES LAYING UP:

Delivery hours will be limited to working hours and those hours detailed.
Deliveries are booked by the contractor as to avoid multiple deliveries at the same time.

Printed Copies of this document are uncontrolled.

- Ensure that windows and mirrors are kept clean and clear.
- Keep the vehicle tidy and free from items which may hinder the operation of the vehicle controls.
- Do not allow passengers to ride on the vehicles unless safe seating is provided.
- Park vehicles on flat ground wherever possible, with the engine switched off the handbrake and trailer brake applied and where necessary use wheel chocks.
- Do not reverse without reversing aid or banksman assistance.
- Where visibility from the driving position is restricted, use the visibility aids or a signaller and stop if you lose site of the signaller.
- Do not remain in vehicles during loading operations unless the driver's position is adequately protected.
- Ensure loads are safe to transport.
- Do not attempt to get on or off moving vehicles.
- Do not make adjustments with the engine running and guards removed.
- Do not smoke during refuelling operations.
- Do not use a mobile phone whilst driving.

SIGNALLER/ BANKSMAN CHECKLIST:

- Use the relevant safety procedures and correct signalling systems.
- Ensure drivers understand the correct signalling systems.
- Signal instructions clearly.
- Ensure you are visible to the driver and the driver is visible to you, if not stop the vehicle moving.
- Stand in a safe location at all times.
- Warn pedestrians and make sure they are kept away from the vehicle's operations.
- Wear appropriate protective clothing, including high-visibility clothing.
- Report work hazards to supervisors.
- Make sure you get to and from your work location safely.
- Do not ride on the vehicle you are directing unless you are in a designated safe position.
- Do not direct vehicles if your ability is affected by alcohol or drugs.
- Do not use a mobile phone whilst directing vehicles.