




- GENERAL SAFETY:**
- WHERE THE BASE (ROAD BASE) HAS BEEN USED AS A TEMPORARY RUNNING SURFACE DURING THE CONTRACT IT SHALL BE THOROUGHLY CLEANED AND POWER WASHED AS NECESSARY. AFTER DRYING AND IMMEDIATELY BEFORE THE BRICKS COURSE IS Laid A TACK COAT OF BITUMEN EMULSION CLASS A-40 OR A-40 TO BSA43 SHALL BE APPLIED AT A RATE OF 0.35-0.55 LITRES PER SQUARE METRE.
 - ALL RADIIUS KERBS WITH A RADIUS OF 12m OR LESS SHALL BE FORMED WITH PROPRIETARY RADIUS KERBS.
- HEALTH & SAFETY:**
- CONTRACTOR SHOULD BE AWARE OF GENERAL CONSTRUCTION RISKS TO PREVENT SLIPS, TRIPS AND FALLS AND TAKE NECESSARY PRECAUTIONS WITHOUT SPECIAL INSTRUCTION.

- ROADS & DRAINAGE:**
- CONTRACTOR TO PROVIDE TRENCH SUPPORTS AS APPROPRIATE AND ENSURE THAT PLANT REMAINS A SAFE DISTANCE FROM TRENCHES PRIOR TO INSTALLING DRAINAGE.
 - THE TIME THAT EXCAVATIONS ARE OPEN ON SITE SHOULD BE KEPT TO A MINIMUM AND ALL TRENCHES SHOULD BE SURROUNDED BY A BARRIER.
 - CONNECTIONS TO EXISTING SERVICES TO BE MADE BY APPROVED CONTRACTOR ONLY.
 - CONTRACTOR TO MAKE OPERATIVES AWARE OF ASSOCIATED DANGERS TO HEALTH SUCH AS LIFTING/HANDLING OF LOADS AND RECOMMENDED PRECAUTIONS. ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING TO BE PROVIDED AS REQUIRED.
 - UNSTRENGTHENED MANHOLES MUST BE COVERED WITH LOAD BEARING MATERIALS AND SURROUNDED WITH BARRIER.
- Pipes & Cables:**
- CONTRACTOR TO OBTAIN ALL SERVICE RECORDS PRIOR TO WORKS COMMENCING. SERVICE RECORDS TO BE REFERRED TO PRIOR TO WORK COMMENCING. CONTRACTOR TO PROCEED WITH CAUTION AND SERVICES TO BE LOCATED BY HAND DIG AND PROTECTED ACCORDINGLY.
- EXCAVATIONS:**
- CONTRACTOR TO ENSURE RELEVANT MEASURES ARE TAKEN TO KEEP PLANT AND PEOPLE A SAFE DISTANCE FROM STEP-UP SLOPES DURING THE WORKS.
 - CONTRACTOR TO ENSURE THAT PROCEDURES ARE IN PLACE TO KEEP PEOPLE A SAFE DISTANCE FROM WORKING PLANT WHERE NECESSARY.
 - CONTRACTOR TO REFER TO CIRCLING INVESTIGATION REPORT FOR CONTAMINATION TESTS AND TO PROVIDE ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING AS REQUIRED.

- DESIGN NOTES:**
- PROPOSED LEVELS HAVE BEEN BASED ON THE EXISTING TOPOGRAPHICAL SURVEY BY J.P. SURVEYING CONSULTANTS LTD. DRAWING REF 04/2018 (DATED AUGUST 2016).
- ALL WORKS TO COMPLY WITH CURRENT VERSION OF THE FOLLOWING DOCUMENTS:
 - DESIGN MANUAL FOR ROADS AND BRIDGES (DMRB)
 - SPECIFICATION FOR HIGHWAY WORKS (SHA)
 - LOCAL AUTHORITY DESIGN CODE AND SPECIFICATION
 - PRIOR TO COMMENCING WORKS THE CONTRACTOR SHOULD INVESTIGATE AND LOCATE ANY NECESSARY ANY STATUTORY UNDERGROUND EQUIPMENT WITHIN THE NEW ACCESS AND OCCUPY REQUIREMENTS FOR UNDERGROUND SERVICES AND PROTECTION WITH THE RELEVANT AGENCY(IES).
 - ALL WORKS WITHIN THE PUBLIC HIGHWAY TO MEET LOCAL AUTHORITY REQUIREMENTS. CONTRACTOR TO APPLY FOR ROAD OPENING NOTICES ETC AS REQUIRED.
 - ROADS CONSTRUCTION DETAIL SUBJECT TO CONFIRMATION OF DBL VALUES CONTRACTOR TO ALLOW FOR LAB TESTS TO BE UNDERTAKEN IN AGREEMENT WITH LOCAL AUTHORITY HIGHWAY ENGINEER PRIOR TO WORKS COMMENCING.
 - WORKS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE RELEVANT STANDARDS. DMRB SPECIFICATIONS AND GUIDANCE. ANY RELEVANT NOTICES ON SITE ARE TO BE ADDRESSED TO THE SATISFACTION OF DBM AS LIA THROUGH THE DEVELOPMENT MANAGEMENT TEAM.

- ROAD MARKING NOTES:**
- DESIGN NOTES:**
- ALL PROPOSED ROAD MARKINGS TO BE IN ACCORDANCE WITH THE MOST RECENTLY UPDATED CHAPTERS OF THE FOLLOWING:
 - TRAFFIC SIGNS REGULATIONS AND GENERAL DIRECTIONS (TSRD) AND
 - TRAFFIC SIGNS MANUAL CHAPTER 1 - ROAD MARKINGS
 - THEMOPLASTIC ROAD MARKING COLOURS AS INDICATED BELOW. MATERIALS AND SHADING RESISTANCE TO BE IN ACCORDANCE WITH WORKS SPECIFICATION.
 - ALL ROAD MARKINGS TO BE RETRO-REFLECTIVE IN ACCORDANCE WITH CHAPTER 1 & TABLE 1.2.
 - CENTRE LINE MARKINGS IN SHAW LANE SHALL INCLUDE WHITE ROAD STUDS TO CL 100.
 - ALL EXISTING MARKINGS ARE TO BE REMOVED WHERE REPLACED BY NEW.

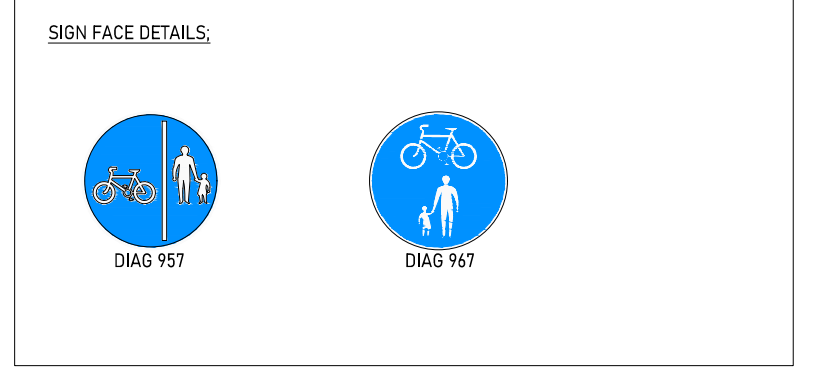

SUBJECT TO LOCAL AUTHORITY APPROVAL

07.09.2024 (UPDATED TO SUIT NEW LAYOUT)		SR	AE	2
24.06.2024 (FIRST ISSUE)		SR	AE	1
Date		Drawn (Checked) Rev		
Dwg Status	SCHEMATIC			
NORTH EAST 000 288 642 WORKSHEET 010 515 350 CONSULTING ENGINEERS WWW.DWG.GROUP INFO@DWG.GROUP				
Client	VISTRY GROUP			
Project	SHAW LANE CARLTON			
Title	S38 SIGNING AND LINING PLAN			
DO NOT SCALE	Scale @ A3: 1:500	Drawn: GR	Checked: AE	Date 23.08.2024
Job No	24307	Dwg No	D802	Rev 2