
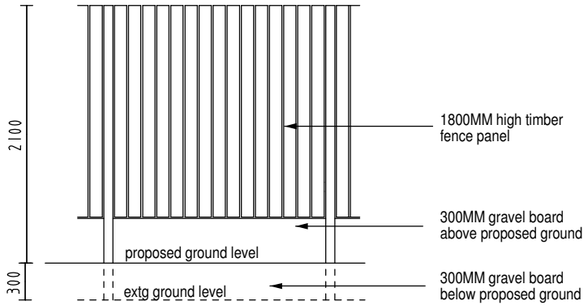


2100 HIGH SCREEN FENCE
WESTERN BOUNDARY



1800 HIGH SCREEN FENCE

Landscaping

Replacement tree planting where shown as follows:

A Prunus Avium (sweet cherry) 8-10 standard 2.5-3m
B Sorbus Aucuparia (Rowan) 8-10 standard 2.5-3m
C Acer Campestre Streetwise 8-10 standard 2.5-3m

Trees to be UK provenance with undamaged and well brancing heads and single central leader, and healthy fibrous root system.

Trees to be planted into tree pits 75mm deeper than the root system and wide enough to accommodate the root system when fully spread. Break up bottom of pit and backfill with 3:1 excavated topsoil:peat free compost mix and slow release fertiliser.

Position softwood stake close to tree on windward side and drive vertically at least 300mm into bottom of pit before planting. Cut stake to 600mm above ground level and secure tree firmly but not rigidly to stake with 2No ties within 25mm of top of stake. Water in all trees on the day of planting with 25 litres of clean water, and continyue tpo water during spring and summer during dry

Rev A - Jun 20 = Dyke realined
Rev B - Jul 20 - plots 1 and 2 amended
Rev C - Jul 20 - plot 1 repositioned
Rev D - Aug 20 - bin collection point indicated
Rev E - Sep 20 - levels / landscape noted

IVANHOE HOMES LTD

PROPOSED DEVELOPMENT AT
LAND TO NORTH OF LANE END MEWS
OFF HIGH STREE
THURNSCOE

SITE PLAN

scale	date	drawn	checked
1:500 @ A3	SEP 19	PB	

drawing no	revision
19 - 143 - 2	E

C3 Architecture Planning & Design Ltd
Tel 07914 939157
web www.c3planninganddesign.co.uk
email info@c3planninganddesign.co.uk