



With prior approval all vegetation and leafmould is to be cleared from the structure and the surrounding 1m. This does not include lichen or moss which should be left as found.

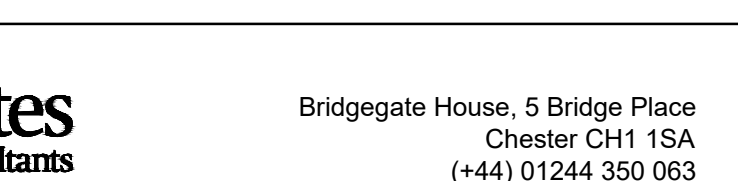
All given measurements are indicative only and should be checked on site by the contractor.

All leadwork to comply with Lead Sheet Academy Guidance.

Survey provided by others.

Contractor to provide all scaffolding and suitable access for undertaking the works. As far as possible

General Note: To be read in conjunction with Donald Insall Associates Preliminaries and Specification, and

[illegible]