

Schwegler 1FR Bat Tube

Schwegler 1FR Bat Tube

This Tube system meets the characteristic behavioural requirements of the types of bats that inhabit buildings. The design maintains excellent climatic conditions inside the Tube, allowing the animals to either hang onto the wooden rear or onto the wood-concrete front. It requires no maintenance because droppings fall out of the entrance ramp.

Suitable for: Bat species that inhabit buildings.


Material: SCHWEGLER wood-concrete with integrated wooden panel onto which the bats can cling.

Installation: Can be installed on external walls - either flush or beneath a rendered surface in concrete and, during renovation work, under wooden panelling or in building cavities (e. g., slab-type building structures, bridges, etc). Although not originally designed for mounting on walls this is possible using on-site supplied fixing brackets. If required, it can be painted using standard air-permeable exterior paint. Birds will not occupy this box. To allow access into existing cavities in buildings, use the 2FR model below.

Dimensions: height 47.5 x width 20 x depth 12.5 cm.

Entrance: W 15 x H 9 x D 2 cm.


Weight: approx. 9.8 kgs.

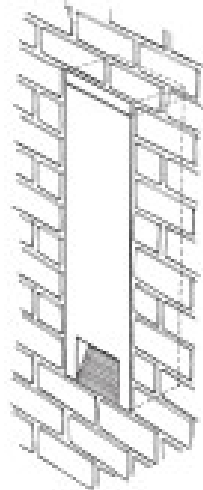

▲ Built into an external wall



▲ Installation within wall – only entrance is visible

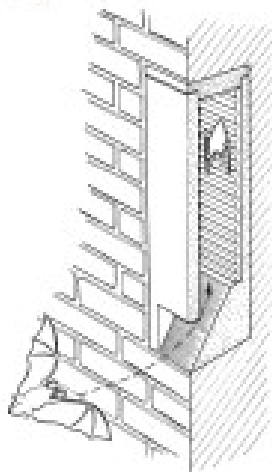

▲ Sectional view 1FR

