


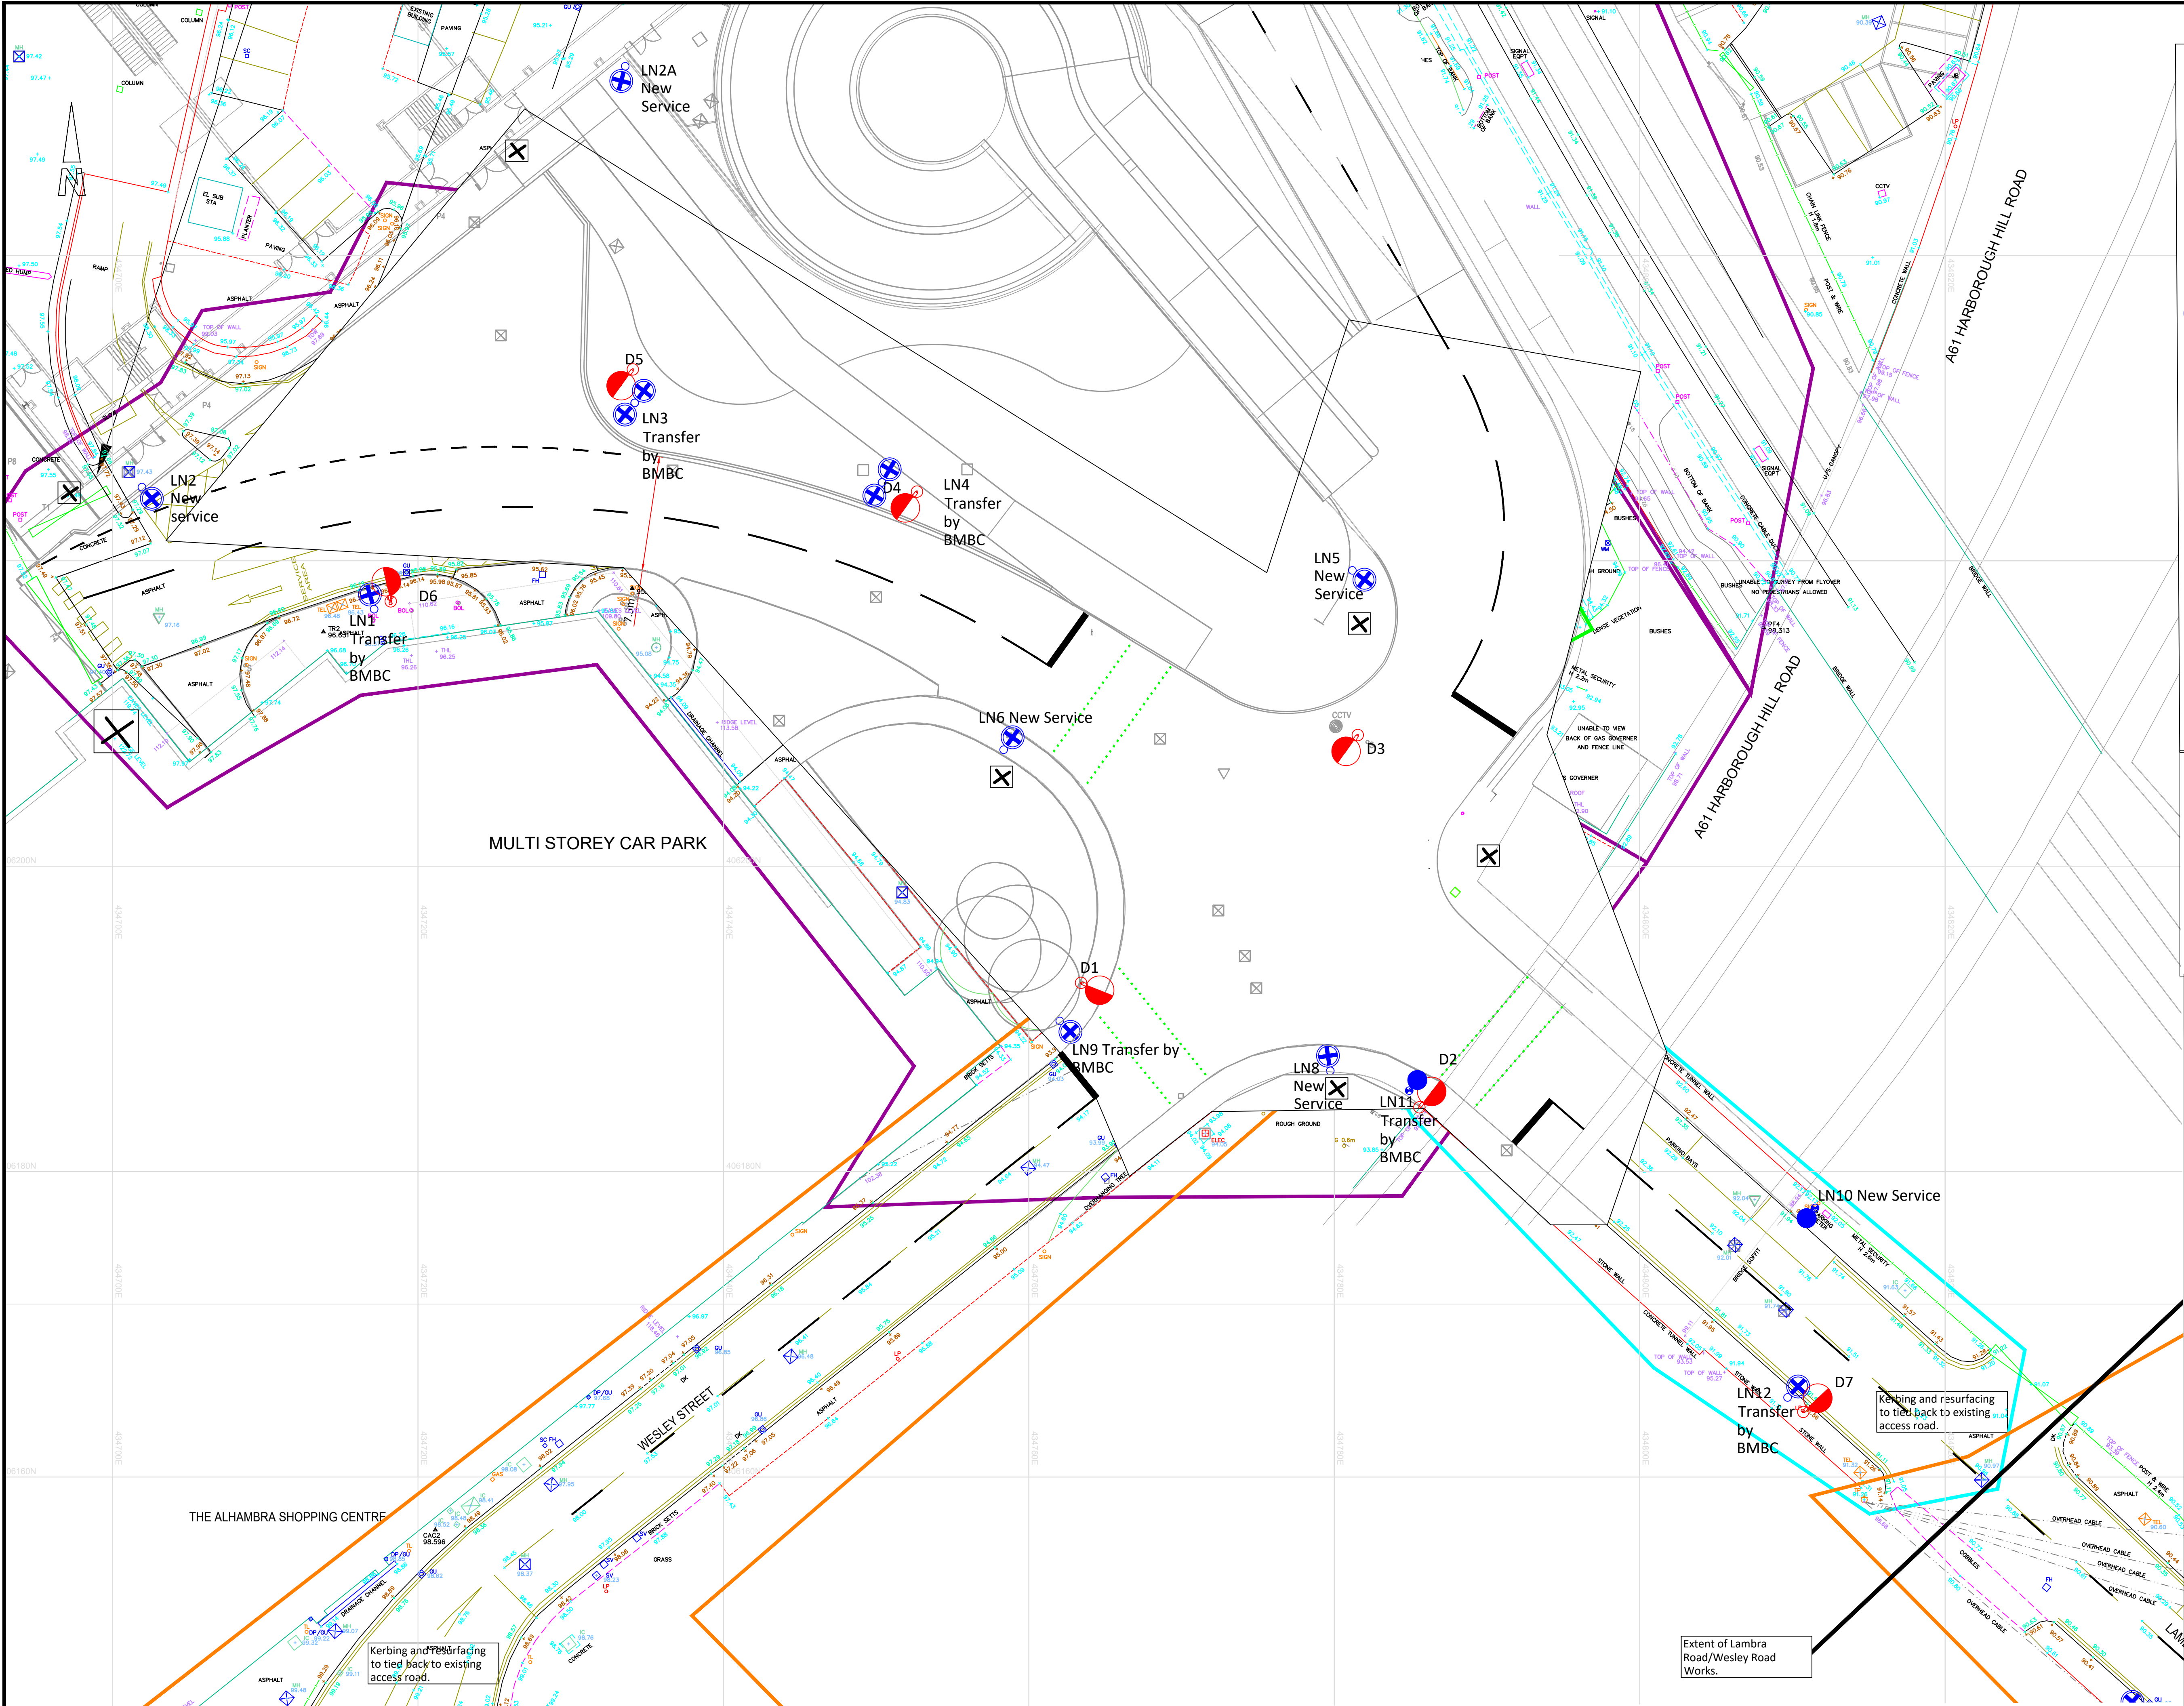

Street Lighting
Arrangement

- disconnect existing STEEL column, lantern to be taken up to store at council depot post to be taken to tip at Council depot.
- New 10M galvanised steel column with Urbis Axia 3.2 9.72km A lantern complete with electronic PEC.
- New 10M galvanised twin head steel column with two Urbis Axia 3.2 9.72km A lantern complete with electronic PEC.
- New 6M Galvanised Steel Column with Urbis Axia 3.1 type C lantern 24 hour on

All columns to be numbered on site as per drawing.

All materials to comply fully with current BMBC Street Lighting Specification.

Column positions may be adjusted slightly to suit site conditions and services, but must not normally be erected within 500mm of defined driveway boundaries.

All lighting columns are to be provided with an unmetred single phase electricity supply via the REC cable network. It is expected that the developer will coordinate with the REC regarding the installation of any cable ducts they may require.

New Service is responsibility of Henry Boot

Transfer of Service is by BMBC

Based upon Ordnance Survey Digital Mapping.
With permission of the Controller of Her Majesty's Stationary Office.
CROWN COPYRIGHT RESERVED
Unauthorised reproduction infringes Crown Copyright and may lead to prosecution or Civil Proceedings.
Licence No. 100022264

Rev.	By	Amendments	Date
A	SGA	remove column LN7 and move LN5	23/2
B	SGA	move columns LN2 and LN2A	17/3



Project
**Lambra Road/Wesley Street
Street Lighting Works**

Drawing title
Street Lighting Proposals

Scale 1:500 @ A1	Drawn SGA	Checked	Date Jan 2021
Drawing No. SL20-12/1300/01/B			File

Paul Castle
Service Director, Environment & Transport.
Place Directorate,
Westgate Plaza, Barnsley, S70 2DR.
Tel. (01226) 773555 Fax. (01226) 772110