
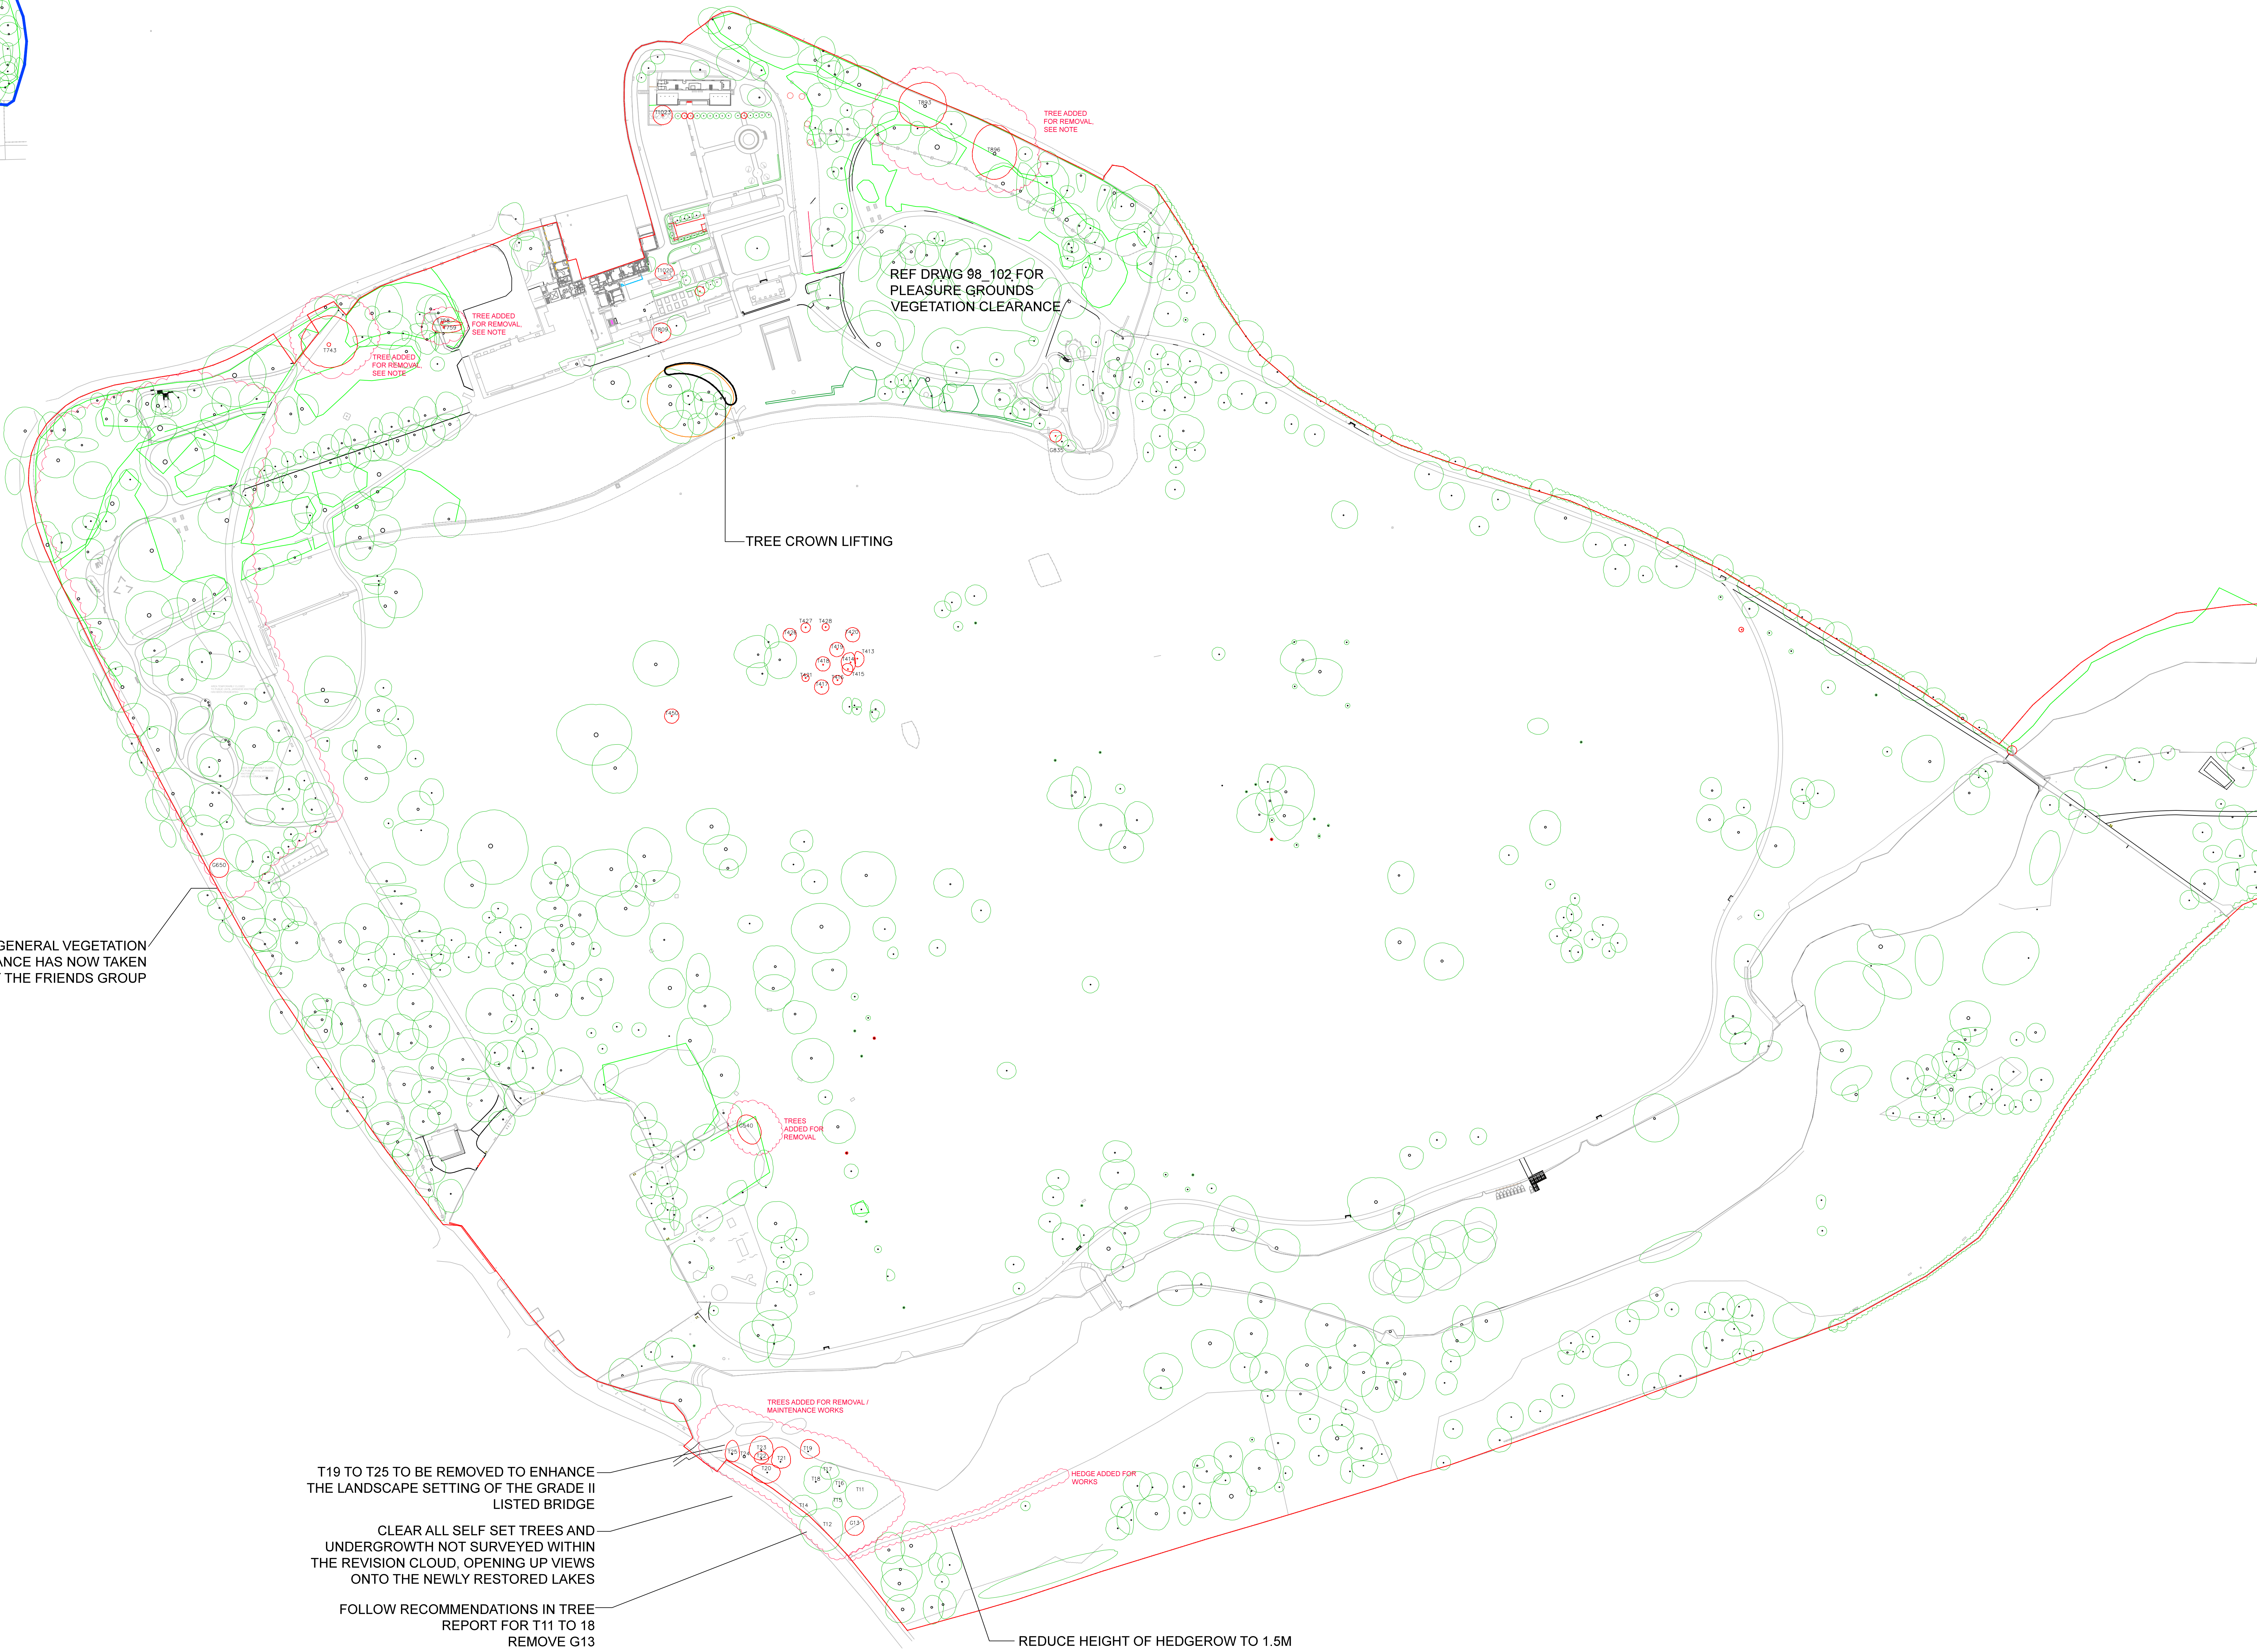


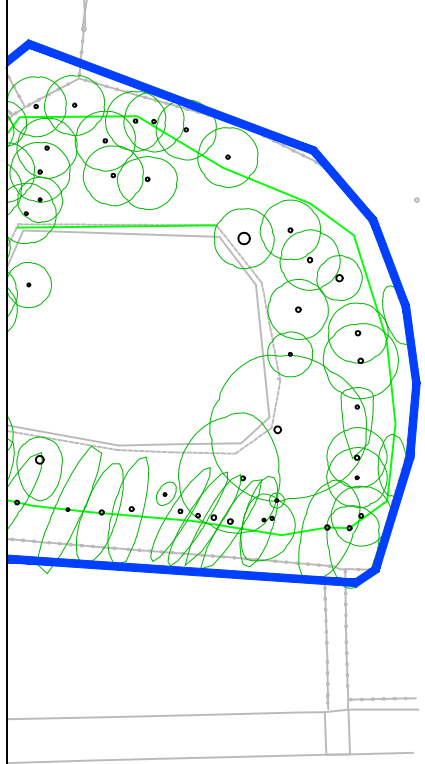

- TREES TO BE REMOVED
- TREES RETAINED
- TREES FOR THINNING
- VEGETATION CLEARANCE 188 m2

TO BE READ INLINE WITH TREE REPORT

NOTE

- Tree works to numbers T743, T893 and T896 will ensure the tree stands as dead wood for habitat without risk of falling.
- Weight should be taken out the canopy to reduce risk. The trunk and a few main stems should be left on the tree.
- Dead tree to be removed from Midden area. The tree is either T758 OR T759, please determine on site and take pictures before felling

DRAWING NOTES:		
GENERAL:		
1. COPYRIGHT OF THIS DRAWING IS VESTED IN PLINCKE AND IT MUST NOT BE COPIED OR REPRODUCED WITHOUT CONSENT.		
2. DO NOT SCALE FROM THIS DRAWING. DIMENSIONS GOVERN IF IN DOUBT ASH.		
3. ALL DIMENSIONS ARE IN METRES UNLESS NOTED OTHERWISE. ONLY FOUR DECIMALS AND TO BE GIVEN FROM THE DRAWING.		
4. ALL DIMENSIONS SHALL BE VERIFIED ON SITE BEFORE PROCEEDING WITH THE WORK. ALL CONTRACTORS MUST VISIT SITE AND BE RESPONSIBLE FOR TAKING AND CHECKING ALL DIMENSIONS RELATIVE TO THEIR WORK.		
5. PLINCKE SHALL BE NOTIFIED IMMEDIATELY BY EMAIL, OF ANY CIRCUMSTANCES, PLINCKE ACCEPTS NO LIABILITY FOR ANY EXPENSE, LOSS OR DAMAGE OF WHATEVER NATURE AND HOWEVER ARISING FROM ANY VARIATION MADE TO THIS DRAWING OR IN THE EXECUTION OF THE WORK TO BRING IT INTO LINE WITH THE INTENT OF THE DRAWING.		
6. TO THESE ARE FROM APPROVAL, SETBACKS.		
7. ALL PLINCKE DRAWINGS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, LANDSCAPE ENGINEERING AND TREE ENGINEERING DRAWINGS AND SPECIFICATIONS.		
REFERENCE FILE:		
CONSULTANT	REFERENCE FILE	DATE RECEIVED
???	???	??/??/??

DETAILS, SAFETY & ENVIRONMENTAL INFORMATION:		
1. IF IT IS ASSUMED THAT ALL WORKS ON THE DRAWING WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR AND, WHERE APPROPRIATE, WORKING TO AN APPROVED METHOD STATEMENT.		
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, NOTES WHICH HAVE BEEN IDENTIFIED AND RECORDED WITHIN THE PRE-CONSTRUCTION INFORMATION PACK AND ON THE CONSTRUCTION DRAWING SHEET.		
3. IN ADDITION TO THE HAZARDS / RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK OUTLINED ON THIS DRAWING, NOTE THE FOLLOWING:		
ITEM N°	REMARKS / DETAILS	
???	???	

C03	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
C02	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
C01	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
T04	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
T03	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
T02	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
T01	REVISION	ADDITIONAL CHANGES TO TREE WORKS AROUND THE	SS	AA	15/07/19
REV	DESCRIPTION	DATE	DRAWN	CHECK	DATE



MANCHESTER
t:0161 237 9223
e:north@plincke.co.uk

LONDON
t:0207 739 3330
e:london@plincke.co.uk

PROJECT TITLE
CANNON HALL PARKS FOR PEOPLE

DRAWING TITLE
SITE WIDE EXISTING TREES AND VEGETATION TO BE REMOVED

SCALE: 1:500

DATE
15/07/18

REVISION
C03

PROJECT No.
0292

DRAWING No.
0292_PL1_SS_C3_DR_04_001

SCALE BAR @ 1:500