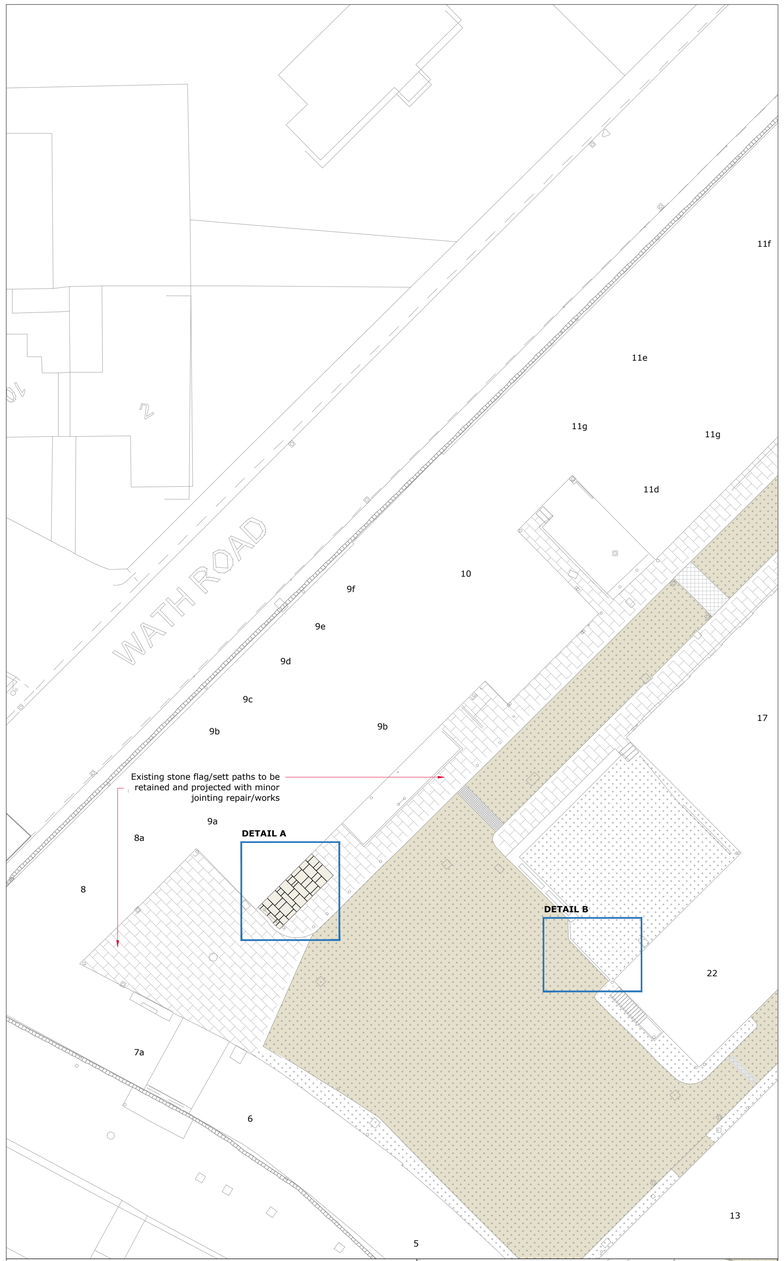
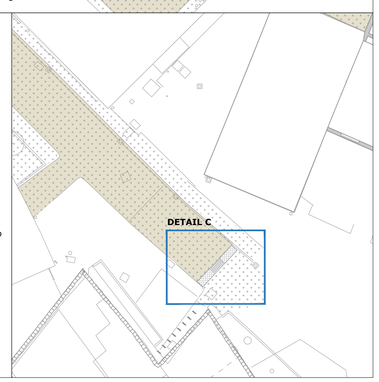



## LEGEND - 1:200

**Existing Tarmac**
To be retained.

**Existing Paving**
To be retained.

**Existing Granite Setts**
To be retained.


**Tar Spray and Chip Surfacing**
Double layer surface application directly to existing tarmac surfacing, although certain areas to be planed where there are level irregularities. Locally sourced angular 6mm gravel in grey/buff mixed tones, binder to be polymer reinforced hot applied liquid binder such as Colas Surfix 80S or similar. Contractor to offer gravel samples for approval.

**York stone Paving**
Proposed reclaimed York stone riven flags to match existing at Elsecar (contractor to offer examples for approval).


**Reclaimed Granite Setts**
Size: 100 x 100 x 100mm to match existing at Elsecar.




**DETAIL A**
Photograph

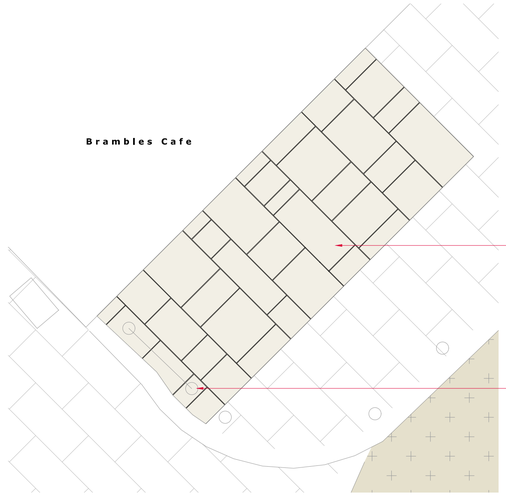


**DETAIL A**
Scale 1:50

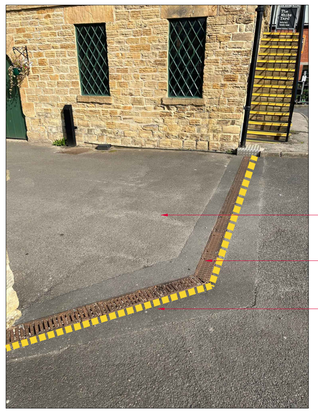



**DETAIL B**
Photograph

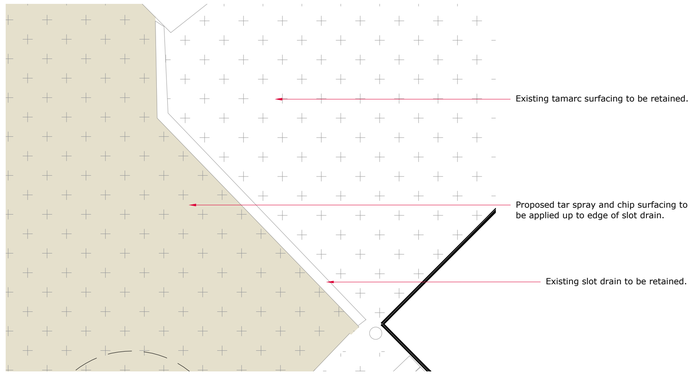



**DETAIL B**
Scale 1:50



**DETAIL C**
Photograph

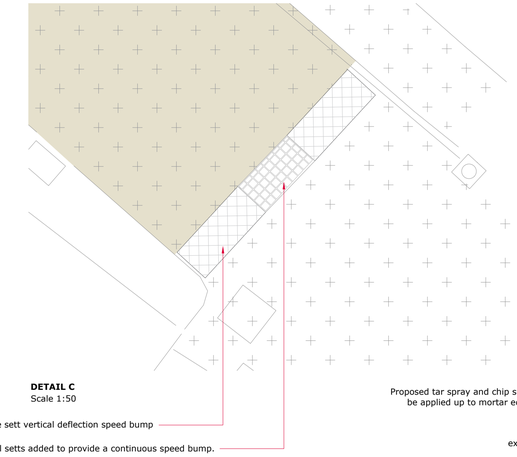


**DETAIL C**
Scale 1:50

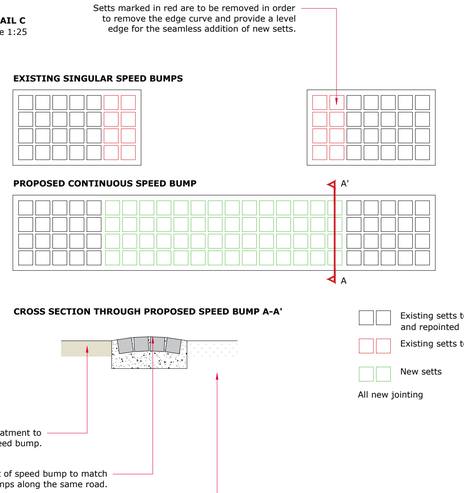


**DETAIL C**
Scale 1:25

**LOCATION PLAN**
Scale 1:250

**NB,** All kerbs, levels and drainage systems retained as existing.

| Rev | Description | By | Chk | Date |
|---|---|---|---|---|
| – | RIBA 4 issue for coordination. | EF | RS | 29.09.23 |

**NOTES - IF IN DOUBT, ASK**

1. Do not scale directly from this drawing.
2. All dimensions are in metres.
3. All levels are shown in metres Above Ordnance Datum (AOD).
4. All levels and dimensions are to be checked on site by the site manager/contractor prior to commencing any works or ordering any materials.
5. This drawing is to be viewed in conjunction with all other detailed drawings and specifications from all members of the design team.
6. Any conflicts/discrepancies are to be highlighted to Southern Green prior to commencing works or ordering any materials.

**CDM - SAFETY, HEALTH & ENVIRONMENTAL INFORMATION**
**Principal Designer:** ----------

In addition to the hazards/ risks normally associated with the types of work detailed on this drawing, note the following project specific risks which require attention/ mitigation by the contractor undertaking the works:

**Construction:** (add notes/ none identified)
**Maintenance/ Cleaning:** (add notes/ none identified)
**Decommissioning/ Demolition:** (add notes/ none identified)

It is assumed that all works will be carried out by a competent contractor, working where appropriate, to their own approved method statement. This is not an exhaustive list and reference must be made to the Construction Phase Plan or Health and Safety File and any additional Risk Assessment documents available.

N

0m 1m 5m 10m

**Scale Bar -** 1:250 @ A1

**1244_ELSECAR**

Elsecar Heritage Centre

Hard Surface Interfaces
Sheet 1 of 2 - Full Package

1244_121F | Rev -

Various @ A1 | 26.09.23

Drawing Issue Status

- [ ] Comment/ Approval
- [ ] Contract
- [ ] Costing
- [ ] Construction
- [X] Planning
- [ ] Record Dwg
- [ ] Tender
- [ ] BIM

© Copyright and all intellectual property rights remain vested in Southern Green Ltd

SouthernGreen

0191 440 0034
www.southerngreen.co.uk
studio@southerngreen.co.uk