



Plan view	Description	Comments
H01	Proposed hedgerow. Ref. to Planting Table	
Mix01	Proposed native shrub mix. Ref. to Planting table	
Mix02	Proposed ornamental shrub mix. Ref. to Planting table	
Mix03	Slope stabilising shrub mix. Ref. to Planting table	
Mix04	Proposed biodiversity-rich planting mix. Ref. to Planting table	
WFM	Proposed wildflower mix. Ref. to Planting table	

Mix 05 omitted

Planting table	Size Height, cm	Ctr m	No. / sq.m	Root/ Pot Size	Notes	Mix %	Area sq.m	Total Quantity
<b>Proposed Hedgerow</b>								
<i>Loncera pileata</i>	60-90	0.45	5	2L	Full pot- min 5 breaks	100%	53	265
<b>TOTALS</b>						<b>100%</b>	<b>53</b>	<b>265</b>
<b>Mix 01 Proposed native shrub mix</b>								
<i>Rosa carina</i>	40-60	0.6	3	bare-root	2 years transplants	40%	148	445
<i>Ilex aquifolium</i>	60-90	0.6	3	bare-root	2 years transplants	20%	74	223
<i>Ligustrum vulgare</i>	40-60	0.6	3	bare-root	2 years transplants	15%	56	167
<i>Viburnum opulus</i>	60-90	1.4	0.5	bare-root	2 years transplants	15%	56	28
<i>Ulex europaeus</i>	40-60	0.6	3	bare-root	2 years transplants	10%	37	111
<b>TOTALS</b>						<b>100%</b>	<b>371</b>	<b>974</b>
<b>Mix 02 Proposed ornamental mix</b>								
<i>Potentilla fruticosa 'Sunser'</i>	20-30	0.7	2	2L	Full pot- min 5 breaks	20%	224	448
<i>Spiraea betulifolia</i>	20-30	0.7	2	2L	Full pot- min 5 breaks	15%	168	336
<i>Bergenia 'Abendglut'</i>	20-30	0.5	4	1L	Full pot	15%	168	672
<i>Blechnum spicant</i>	20-30	0.7	2	2L	Full pot- min 5 breaks	10%	112	224
<i>Geranium macrorrhizum 'Bevan's Variety'</i>	15-30	0.5	4	1L	2 years transplants	10%	112	448
<i>Sarcococa confusa</i>	60-90	0.6	3	2L	Full pot- min 5 breaks	5%	56	168
<i>Heuchera 'Lime Marmalade'</i>	20-30	0.5	4	1L	Full pot	5%	56	224
<i>Liriope muscari</i>	20-30	0.5	4	1L	2 years transplants	5%	56	224
<i>Polystichum aculeatum</i>	40-60	0.5	4	1L	3 years transplants	5%	56	224
<i>Skimmia japonica 'Nymans'</i>	60-90	0.7	2	2L	2 years transplants	5%	56	112
<i>Vinca major</i>	60-90	0.4	6	pot 9x9 cm	Full pot	5%	56	336
<b>TOTALS</b>						<b>100%</b>	<b>1120</b>	<b>3416</b>
<b>Mix 03 Proposed slope stabilising mix</b>								
<i>Potentilla fruticosa 'Sunser'</i>	40-60	0.7	2	2L	Full pot- min 5 breaks	25%	55	109
<i>Cornus sanguinea 'Army's Winter Orange'</i>	40-60	0.6	3	2L	2 years transplants	20%	44	131
<i>Skimmia japonica 'Nymans'</i>	40-60	0.5	4	1L	2 years transplants	15%	33	131
<i>Vinca major</i>	20-30	0.5	4	9 cm pot	1 year transplants	15%	33	131
<i>Bergenia 'Abendglut'</i>	20-30	0.5	4	1L	2 years transplants	10%	22	87
<i>Corylus scoparius</i>	40-60	0.5	4	1L	2 years transplants	10%	22	87
<i>Hebera helix</i>	20-30	0.5	4	9 cm pot	1 year transplants	5%	11	44
<b>TOTALS</b>						<b>100%</b>	<b>218</b>	<b>720</b>
<b>Mix 04 Proposed biodiversity-rich mix</b>								
<i>Rosa carina</i>	40-60	1	1	bare-root	2 years transplants	20%	153	153
<i>Cornus sanguinea</i>	40-60	1	1	bare-root	2 years transplants	20%	153	153
<i>Ulex europaeus</i>	40-60	0.71	2	bare-root	2 years transplants	20%	153	306
<i>Crataegus monogyna</i>	40-60	1.41	0.5	bare-root	2 years transplants	10%	77	38
<i>Viburnum opulus</i>	40-60	1.41	0.5	bare-root	2 years transplants	10%	77	38
<i>Loncera periclymenum</i>	40-60	0.71	2	bare-root	2 years transplants	10%	77	153
<i>Prunus spinosa</i>	40-60	1.41	0.5	bare-root	2 years transplants	5%	38	19
<i>Corylus avellana</i>	40-60	1.41	0.5	bare-root	2 years transplants	5%	38	19
<b>TOTALS</b>						<b>100%</b>	<b>766</b>	<b>879</b>
<b>WFM Wildflower meadow mix</b>								
<i>Emorsgate seeds EM1 Basic General Purpose Meadow Mixture (to TGA quality standards)</i>			4			100%	4187	17
<b>TOTALS</b>						<b>100%</b>	<b>4187</b>	<b>17</b>


Notes:  
The drawing is to be read in conjunction with the following documents:

- BALU-BBA-ZZ-ZZ-SH-L-0001- LANDSCAPE MATERIALS SCHEDULE
- BALU-BBA-YAP-XX-SH-L-1012- Landscape Masterplan
- BALU-BBA-YAP-XX-DR-L-7003 - Landscape Details, Soft

For setting out, refer to the drawing:

- BALU-BBA-YAP-XX-DR-L-8001 Detailed External Works Plan, Zone 1 (1 of 4)
- BALU-BBA-YAP-XX-DR-L-8002 Detailed External Works Plan, Zone 2 (2 of 4)
- BALU-BBA-YAP-XX-DR-L-8003 Detailed External Works Plan, Zone 3 (3 of 4)
- BALU-BBA-YAP-XX-DR-L-8004 Detailed External Works Plan, Zone 4 (4 of 4)

This document is © Bond Bryan Architects Ltd  
If in doubt ASK. Drawing measurements shall not be obtained by scaling. Verify all dimensions prior to construction.  
Immediately report any discrepancies on this document to the Originator. This document shall be read in conjunction with associated models, specifications and related consultant documents.

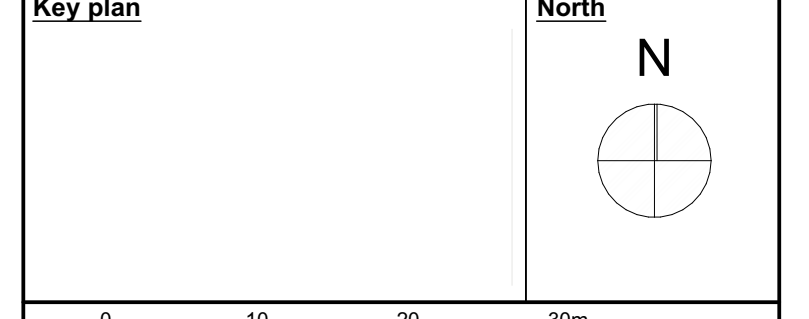

- Legend**
- Total curtilage including adopted highway
  - Developable area
  - North-Eastern Highways Area\*
  - Electrical cable easement areas
  - Proposed hard surfaces
  - Proposed Inset: Public Access, Ref. to BALU-BBA-YAP-XX-SH-L-2001- Soft Landscape Strategy (1 of 2)

- Existing vegetation**  
Ref to Adverse Impact Assessment & Preliminary Mitigation Statement by Thompsons Consultancy
- Existing vegetation to remain
  - Existing vegetation, Root Protection Area

- Access points:**
- Main access point. Public access
  - Secondary access point. (Service route). Public access
  - Access point. (Service route). No public access

Rev	Description	Drawn	Checked	Date
C04	SUDS element omitted	AF	BBA	11/12/2025
C03	Prickly shrub planting removed, ratings along Hill road	AF	BBA	13/11/2025
C02	Safety surface has been removed	AF	JP	11/11/2025
C01	x278 areas amended	AF	JP	13/10/2025
P02	Amendments to species quantities	AF	BBA	03/07/2025
P02	Stage 4 issue	AF	SR	10/02/2025
P01	Issued for Planning, Stage 3	TT	SR	16/07/2024

**BOND BRYAN**  
 info@bondbryan.co.uk  
 www.bondbryan.co.uk

**Barnsley Metropolitan Borough Council**  
 Barnsley Levelling Up Fund  
 Youth Zone Activity Park

**Soft Landscaping Strategy, Planting Plan and Schedule**  
 Originator project ref: 2304B  
 Scale(s): 1:250  
 Paper size: A0  
 Revision description: Preliminary  
 project originator volume level type rate number revision  
 BALU-BBA-YAP-XX-DR-L-2002 C04