


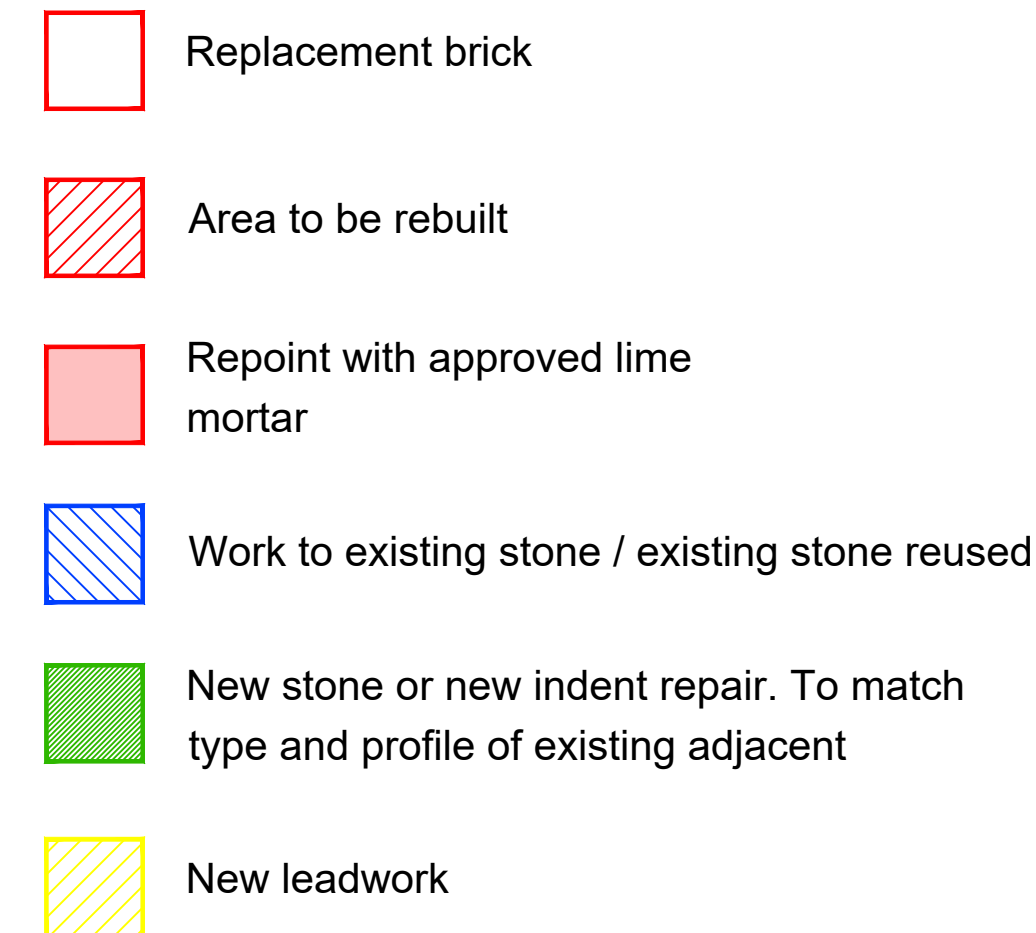

NOTES:
With prior approval all vegetation and leafmould is to be cleared from the structure and the surrounding 1m. This does not include lichen or moss which should be left as found.

All modern security fencing and gates should be labeled, carefully removed and handed to the employer. Make good any damage to the structure caused by fixings associated with the security barriers.

All given measurements are indicative only and should be checked on site by the contractor.



All leadwork to comply with Lead Sheet Academy Guidance.

Survey provided by others.

Contractor to commission petrographic survey on stone and mortar.

Contractor to provide all scaffolding and suitable access for undertaking the works. As far as possible all scaffolding should be free standing. Any fixings into masonry should be agreed with the Architect. The lower part of scaffolding should be protected against unauthorised access as described below and all ladders removed when the site is not attended.

General Note: To be read in conjunction with Donald Insall Associates Preliminaries and Specification, and Mason Clark Associates structural repair proposals.

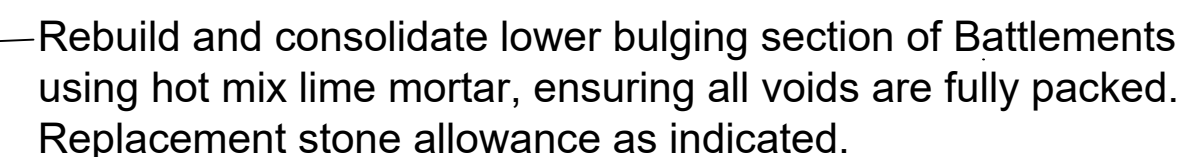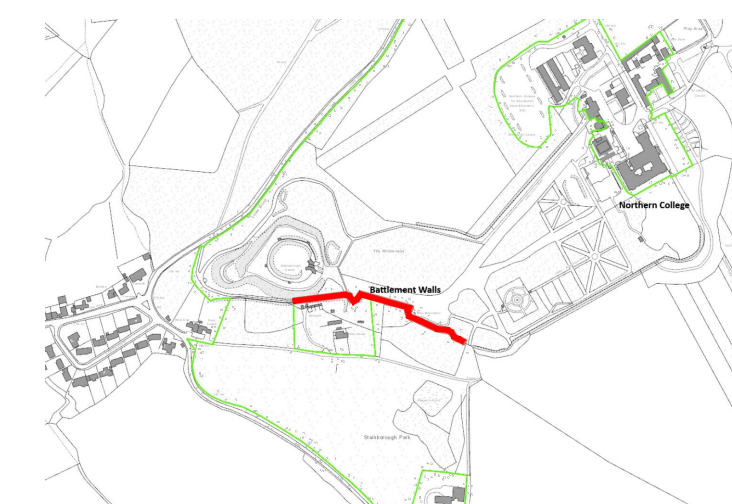

See structural engineers documentation for monitoring specification



Photograph 1

[illegible]