


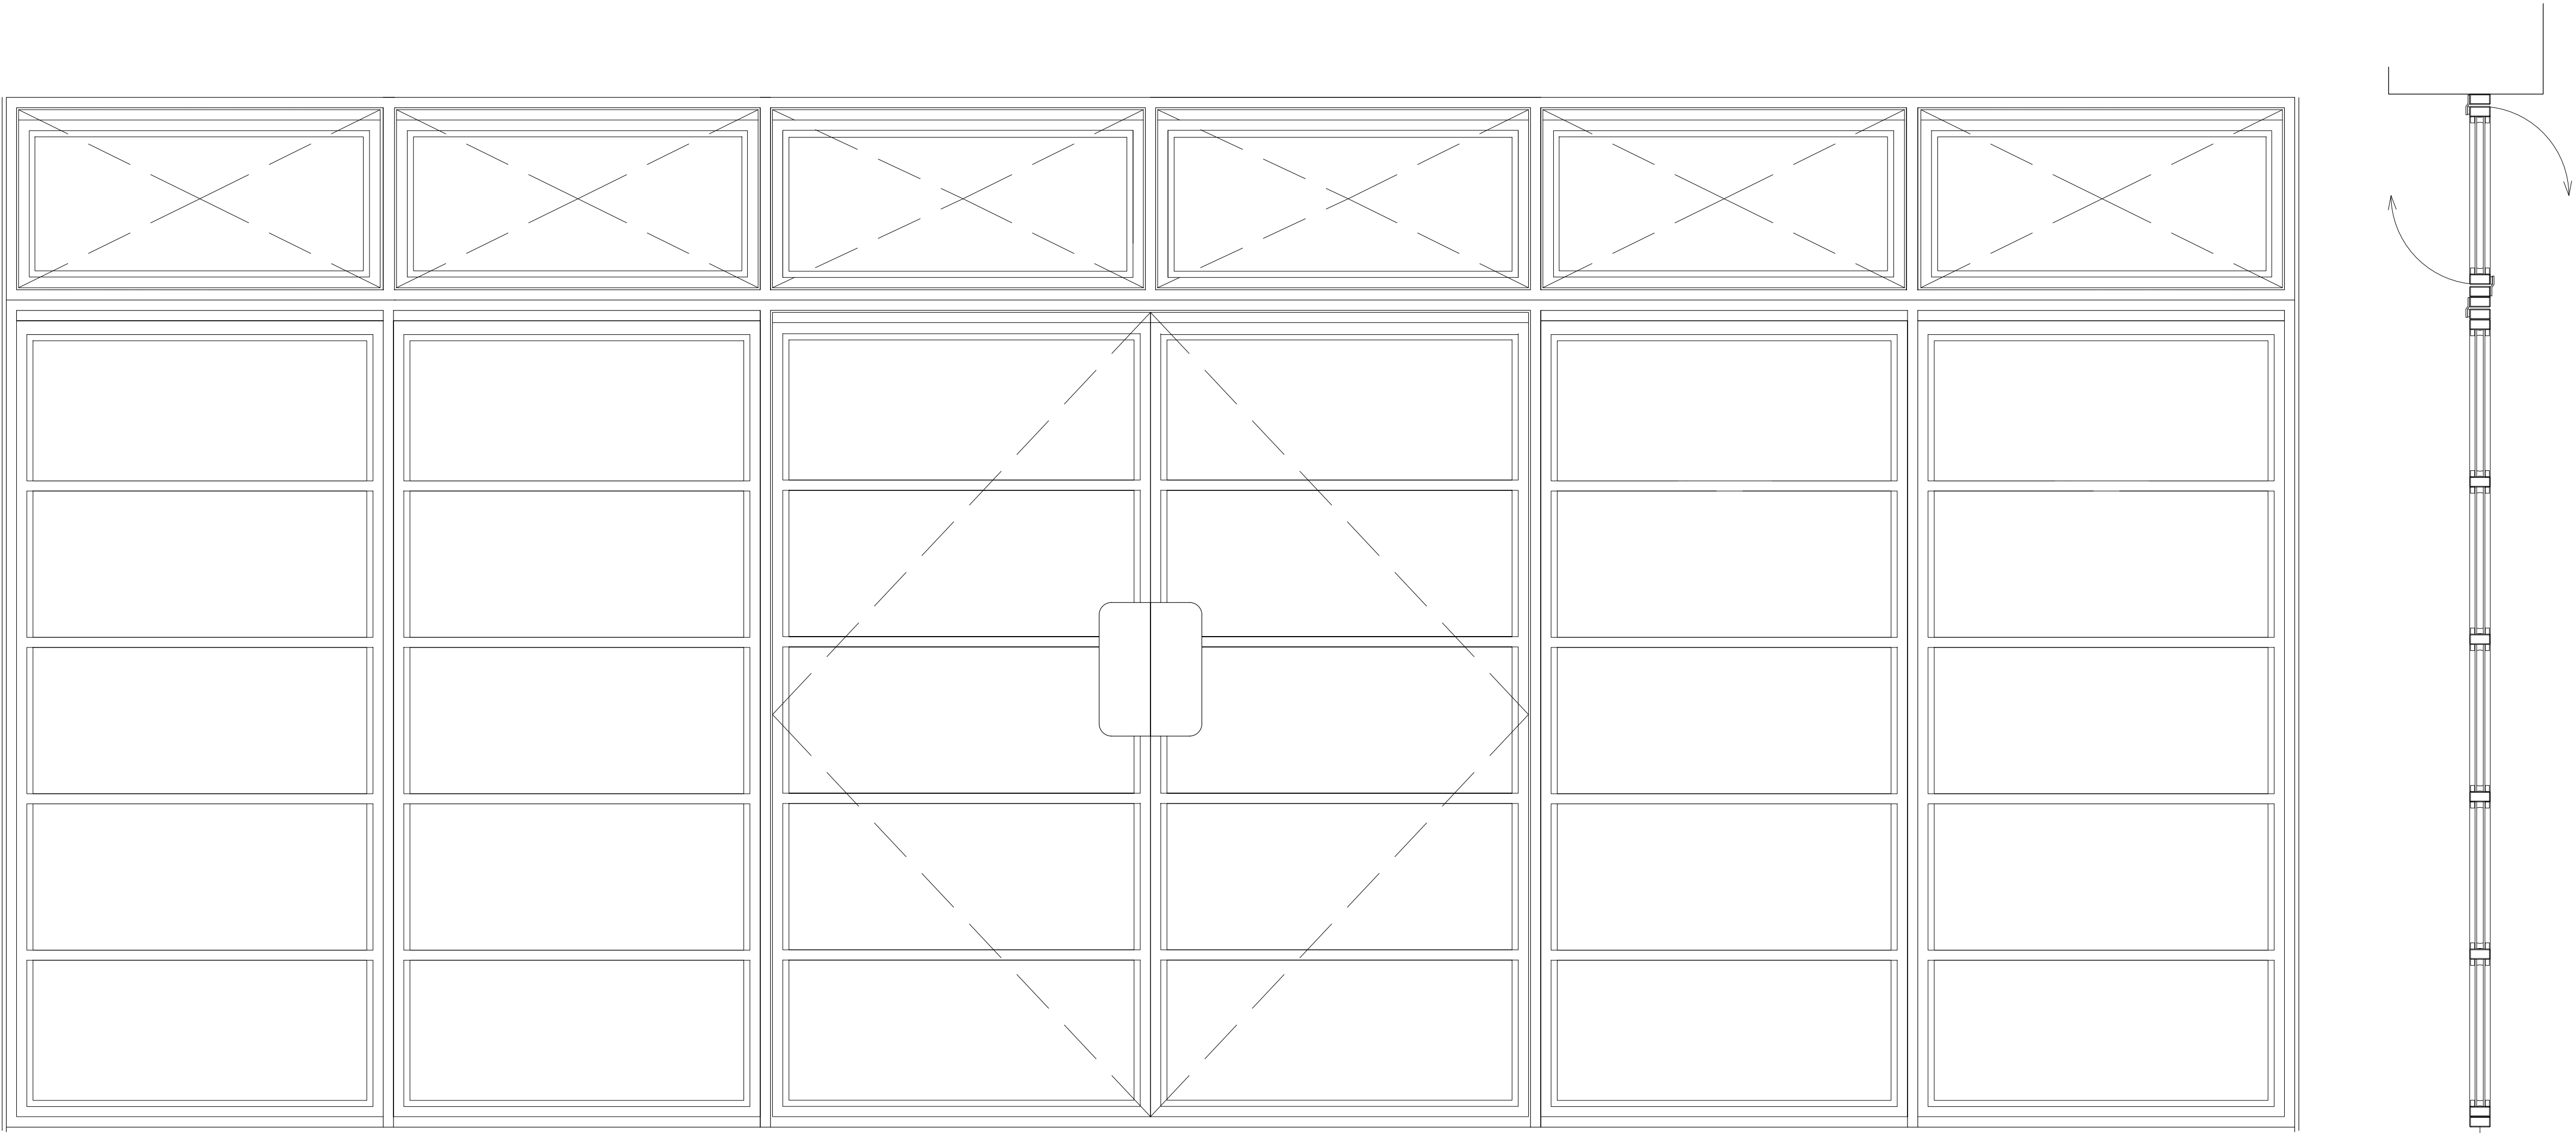

SPECIFICATION

NEW FACTORY FINISHED W20 PROFILE POLYESTER POWDER COATED STEEL GLAZED DOOR.

ARBOKOL AG1 1 PART POLYSULPHIDE SEALANT TO PERIMETER OF FRAMES/BRICK.

DRAUGHT SEALS (TO BS 6375-1:2009) SET INTO STEEL CLOSING PLATES FIXED TO FRAME.


GLAZED WITH 24mm SEALED DOUBLE GLAZED UNITS 6-12-6 MANUFACTURED IN ACCORDANCE WITH BS EN 1279-2, GAS FILLED CAVITY, TO GIVE MAXIMUM U=1.5W/M²K. INNER PANE TO BE LOW-E GLASS FACTORY GLAZED USING DRY GLAZING SYSTEM WITH SECURITY DOUBLE SIDED ADHESIVE TAPE, TOUGHENED OUTER PANE.

FINISH:BLACK.

TRICKLE VENTILATION TO TOP OF CASE

ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO MANUFACTURE

25X25 H/W STRIP PACKER TO BOTH JAMBS TO FORM SHADOW GAP TO FRAME.

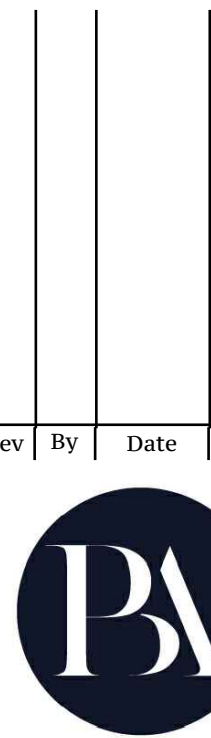

ARCHITECTS

Pearce Bottomley LLP

Roman Ridge, Main Street,
Aberford, Leeds,
LS25 5AW

T: 0113 281 2000
E: pbp@pbarchitects.co.uk
W: www.pbarchitects.co.uk

Client/ Project

DARLEY CLIFFE HALL

Upper Sheffield Road, Barnsley, S70 4PS

Extension & Alterations

Suitability - Stage			Scale		Drawn	Checked	Date
A1 - Planning			1:10 @ A1		TR	TR	OCT 19

Drawing Title / Description
PROPOSED GLAZED SCREEN

Proj. Ref.	Originat.	Volume	Level	Type	Role	Draw. Number	Suitab.	Revision
5177	PBA	ZZ	GF	DR	A	(00)05	A1	

File Name

Copyright Pearce Bottomley LLP