PROVIDE & FIX MARLEY MODERN CONCRETE INTERLOCKING TILES TO NEW EXTENSION



W1 PROVIDE & FIX 1237.5 WIDE WINDOW TO EN-SUITE. DEPTH AS EXISTING BATH WINDOW. WINDOW TO BE DOUBLE GLAZED UNIT WITH FRAMES IN WHITE UPVC. GLASS TO BE OBSCURE

PROVIDE & FIX OGEE GUTTER TO FRONT ELEVATION OVER NEW EXTENSION TO FRONT ONLY

PROVIDE & FIX RENDER INSIDE TIMBER CLADDING TO MATCH THE EXISTING DWELLING

PROVIDE & FIX TIMBER CLADDING TO MATCH THE MAIN DWELLING HOUSE


PROVIDE & FIX DENTIL DETAIL COURSE TO NEW EXTENSION

PROVIDE BRICKWORK DETAIL TO MATCH THE MAIN DWELLING HOUSE


BRICKWORK STRING COURSE TO MATCH THE MAIN DWELLING HOUSE

FRONT ELEVATION

PROVIDE & FIX SOLDIER COURSE ABOVE OPENING OVER CAR PORT

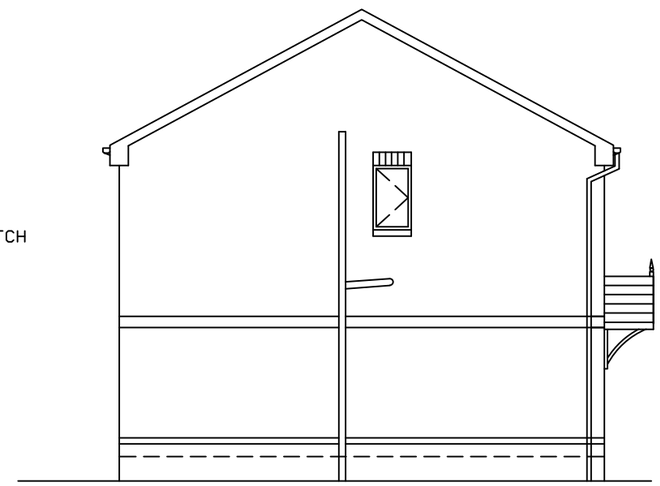

SIDE ELEVATION

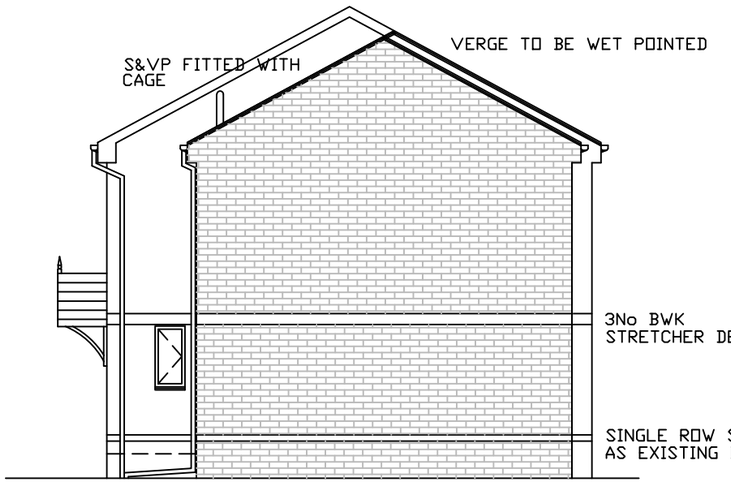


NEW DOWN PIPE TO DELIVER INTO EXISTING

SIDE ELEVATION (FACING NEIGHBOURS DWELLING)

PROVIDE & FIX OGEE GUTTER TO REAR ELEVATION OVER NEW EXTENSION GUTTER TO BE A CONTINUATION OF THE EXISTING

W2 TO INCORPORATE AN ESCAPE SASH SEE SPEC

W2 TO BE 1697.5 BY DEPTH OF EXISTING DRESSING ROOM WINDOW. FINISHED IN WHITE UPVC WITH DOUBLE GLAZED UNITS

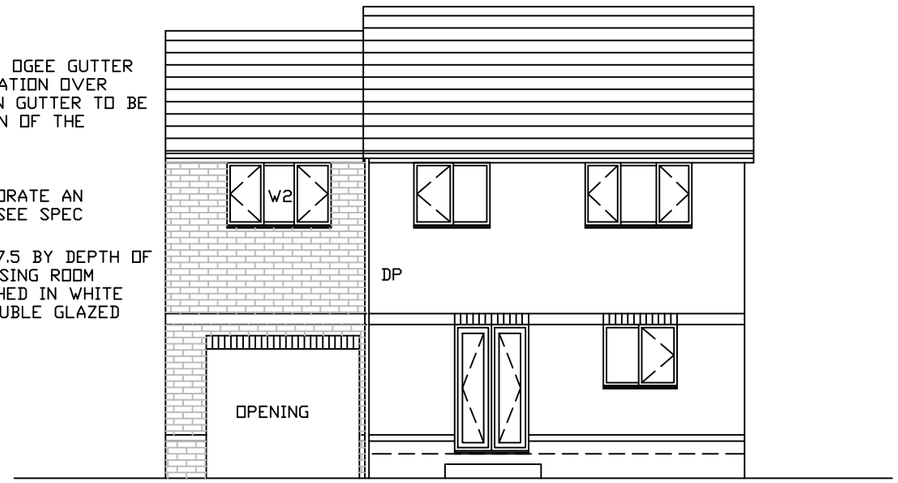

REAR ELEVATION