

EAQ42W

Acoustic window ventilator




Physical specification

All measurements in millimetres unless otherwise indicated


Materials: ABS



Internal

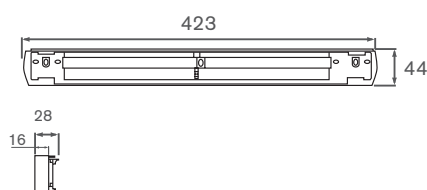

Acoustic spacer

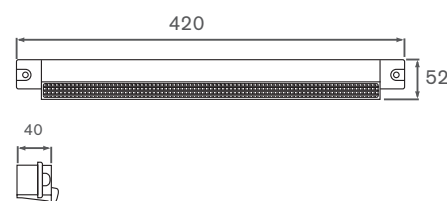

External

Features and benefits

- One of the best performing acoustic window ventilators available in the UK
- Provides an outstanding $D_{n,e,w}$; 42dB(A) for areas with high external noise transmission
- Manual override control option for occupants to ensure a comfortable environment at all times
- Upward air deflection to eliminate replacement air causing draughts
- Manufactured from ABS – available in white as standard
- May require add on section in some window installations


Slot size

Height: 12mm

Length	Central gap	Length
172mm	10mm	172mm

Route slot in window frame as required and screw ventilator over holes.

Performance

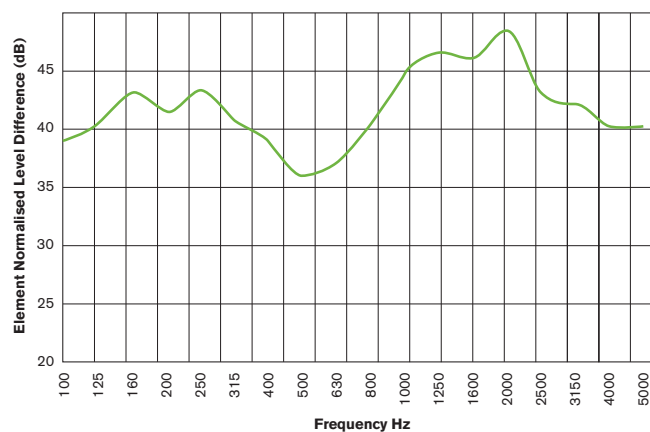

Acoustic performance

$D_{n,e,w}$: Average weighted performance across frequency range

C: Pink noise

Ctr: Road noise

Models, control options and key data

Product code	Controls	Acoustic performance			Equivalent area mm ²	Colour
		$D_{n,e,w}$	$D_{n,e,w}$ (C)	$D_{n,e,w}$ (Ctr)		
EAQ42W *	Bottom	42dB(A)	42dB	42dB	3912	White

* Pricing is variable depending on quantity ordered - please call for details