




View east from May Day Green with glass lift tower element to the right providing access to the foodcourt

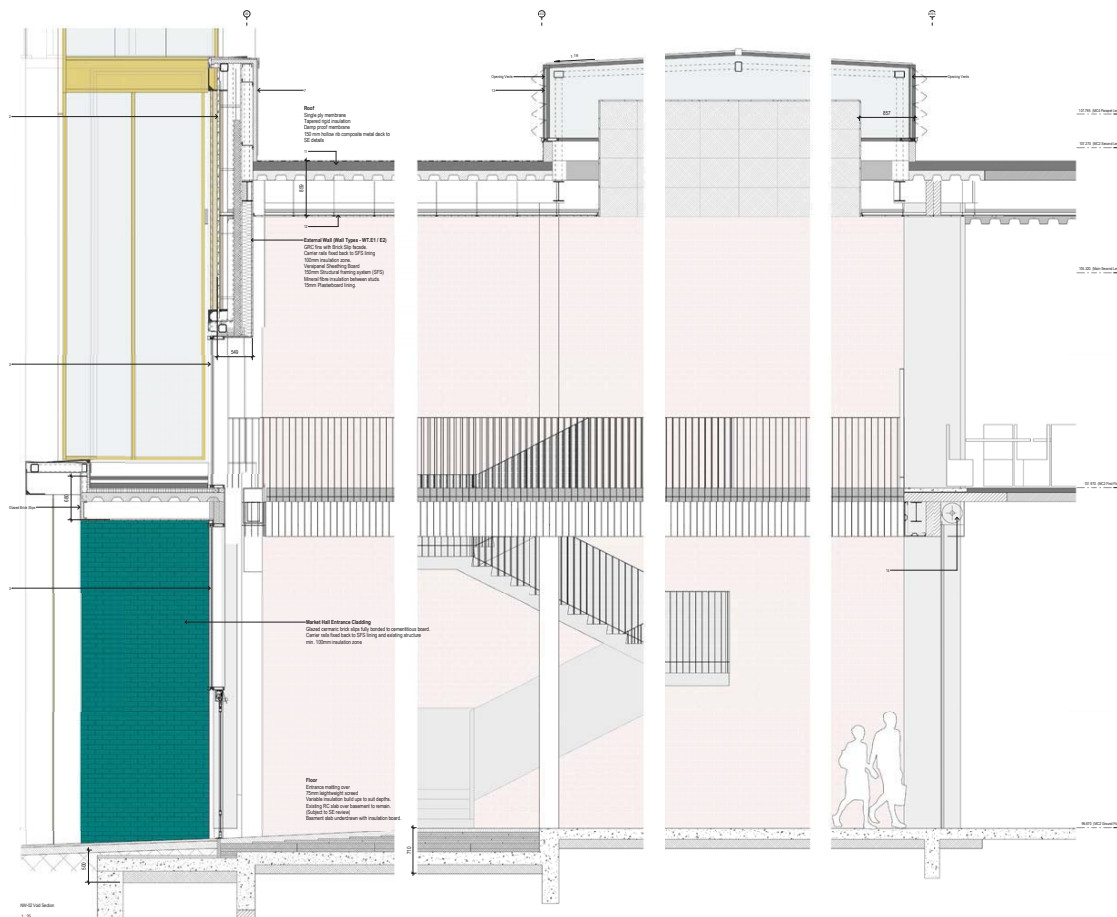

Entrance Hall

The principle entrance to the Markets is from May Day Green. The adjacent drawing illustrates, at a detailed scale, how this is given prominence and theatre through the manipulation of the section.

Consistent to all entrances to the Markets generous glazing is deeply recessed to form a collonaded porch of GRC columns. This reveals and soffit of the porch are lined with coloured glazed bricks to give emphasis and to contrast to the adjacent retail units.



Visitors will enter the building into a double height space made by cutting a large expanse of the existing concrete slab away. This void is lined with open steel balustrading at first floor level which allows visitors to see into the upper market and foodcourt.

Within this space there is a large feature stair that provides access between floors. It's half landings are exaggerated in size and intended to encourage social interaction.

Above the entrance hall is a large rooflight. This provides natural light but also aids orientation and wayfinding.




View south on Cheapside

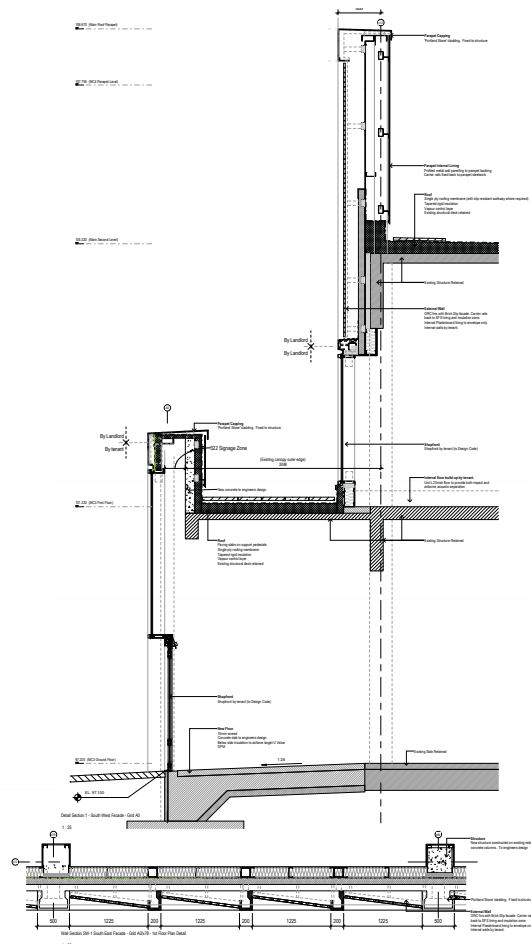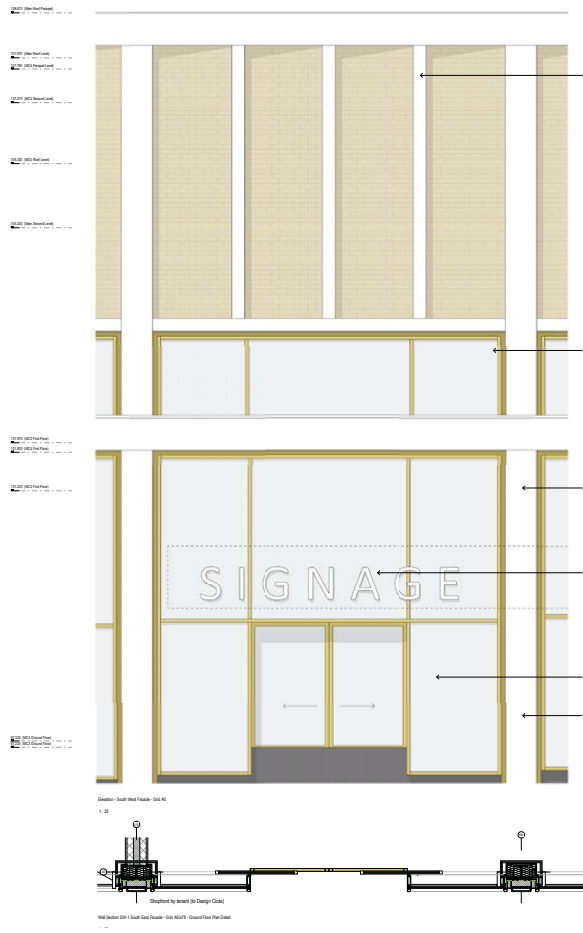

Cheapside
Retail unit with leisure use above



Retail units facing on to Cheapside are largely single story but have a facade which extends above the roof and parapet providing an illusion of height and a scale more suited to the street.

Consistent with other units these are formed from light coloured GRC / recon stone pilasters and entablature with large expanses of glass infill. The first floor is stepped back with glazing onto a terrace and brickwork and GRC fins infill above.






View onto May Day Green from Queen Street with food court 'pavilion' to the first floor corner and terrace above the market entrance

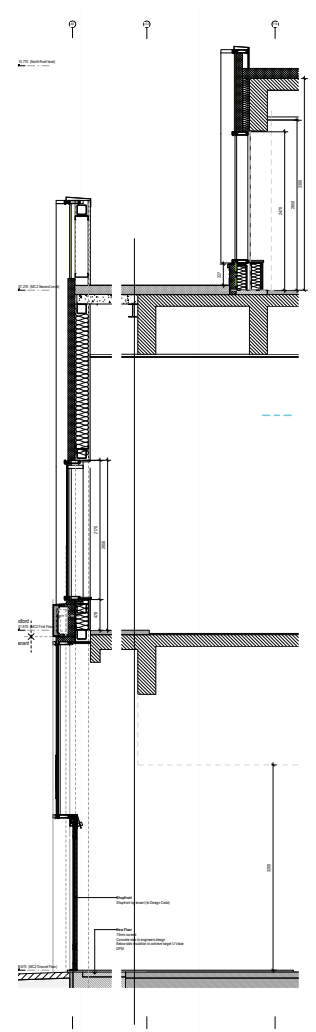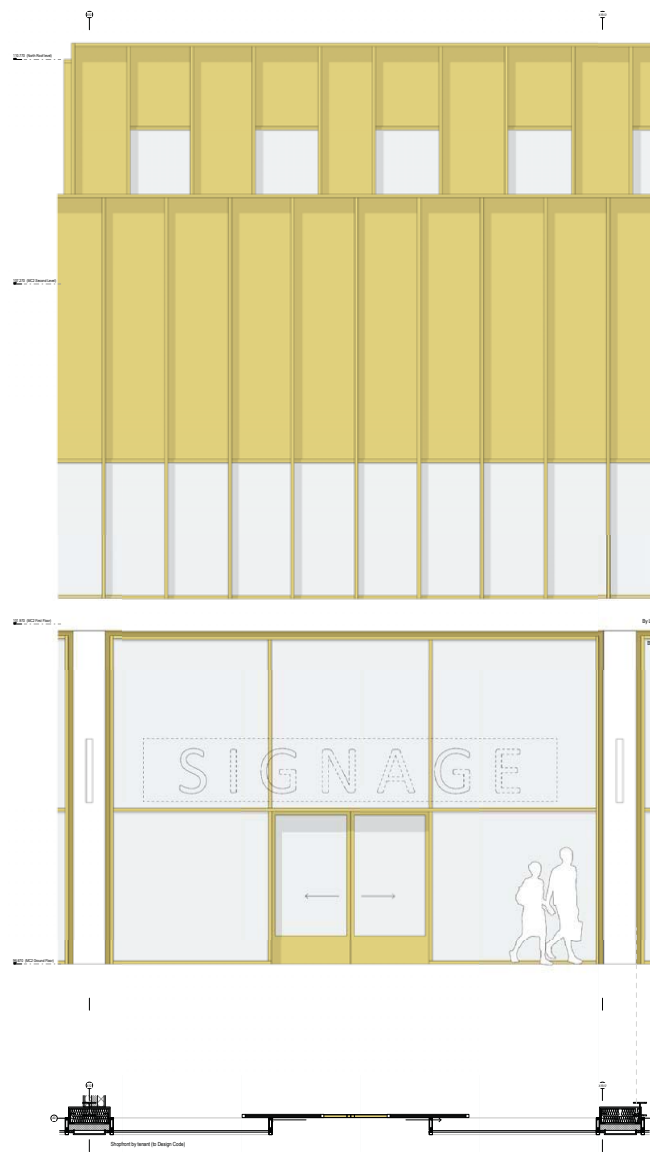


Cheapside
Retail unit with food court above
A large element of the Cheapside facade has retail units on the ground floor with the food court above. The food court is clad in anodised aluminum that sits like a lightweight pavilion onto the GRC frame.







View east within the south arcade with market entrance to the left with glazed brick fascia

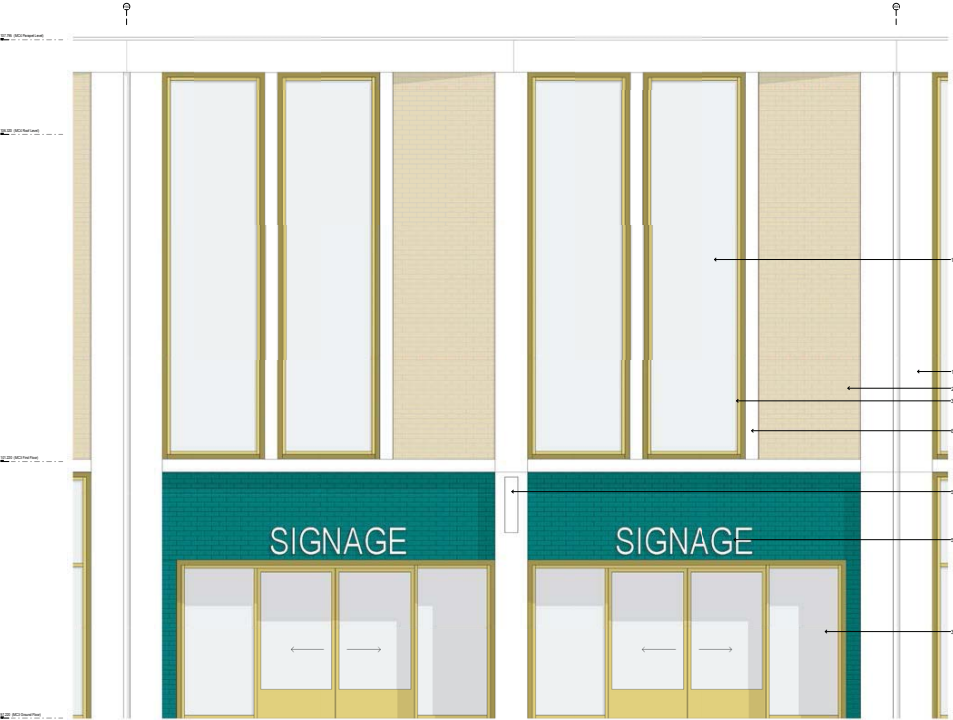

Elevation: South Arcade Facade - East 010
1:25

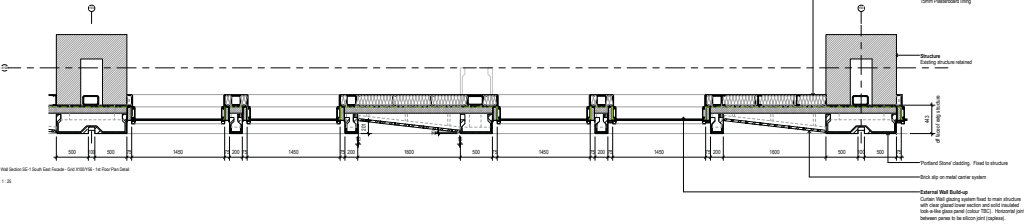


1:25

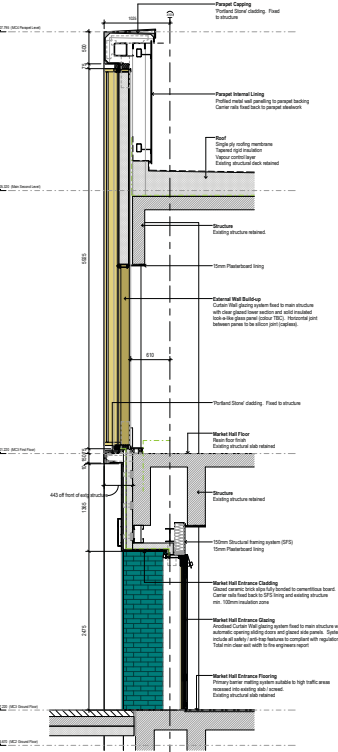

Detail Section 01 - South Arcade Facade - East 010
1:25



South Arcade
Market entrance

Entrances to the market are differentiated from retail units through the inclusion of glazed brick fascia and reveals and deeply recessed shopfronts that form a collonaded porch. At first floor level there are large windows into the upper market hall.





View south within the east arcade

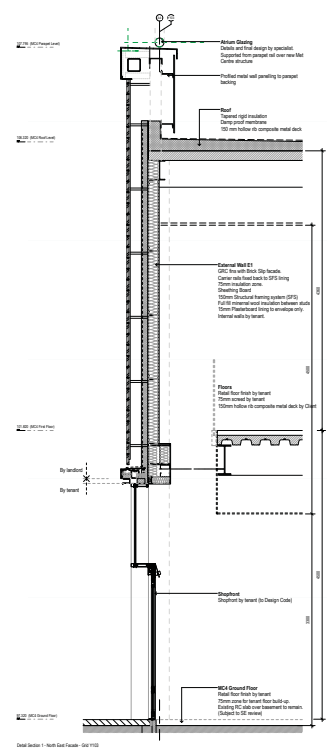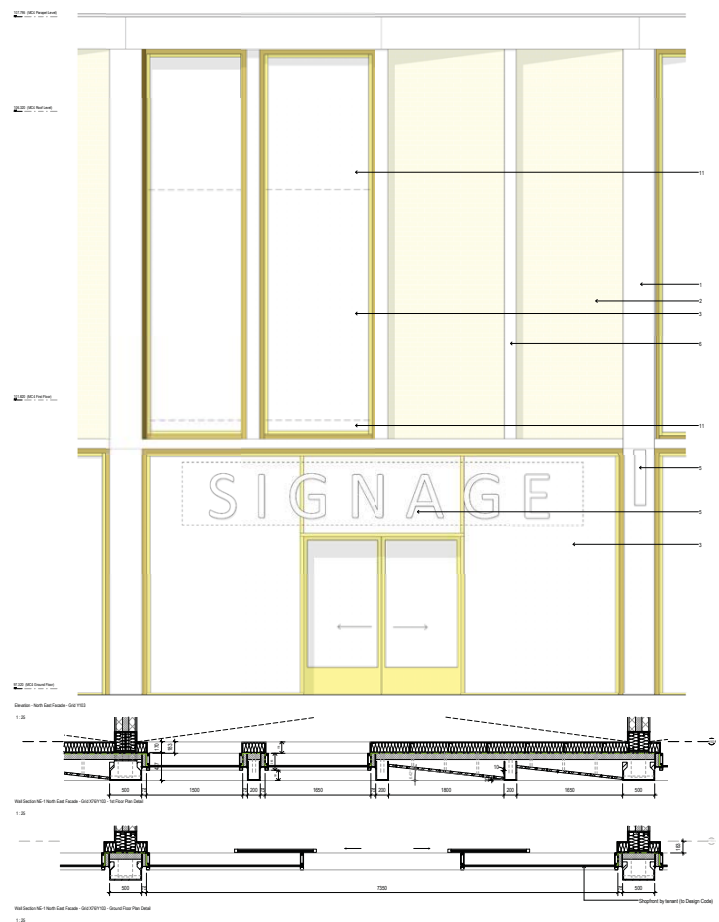

East Arcade
2 storey retail Units

The standard arcade unit references traditional Victorian arcade design but in a refined modern way.

It is formed from light coloured GRC / recon stone pilasters and entablature. On the ground floor is a fully glazed shopfront. On the upper floor is honey-toned brick panels set at an angle to create visual interest punctuated by glazed panels.

