

Conservation Roof Windows

www.velux.co.uk/products



VELUX quality with conservation style. Comes with a black external profile, glazing bar and recessed installation for slated roofs.

- Available in either centre-pivot or top-hung style.
- Top control bar for easy opening and even ventilation when closed.
- Top-hung version suitable for emergency escape.



Slate 35°-90°
Plain tiles 25°-90°
Tiles 15°-90°


Centre-pivot



Slate 35°-55°
Plain tiles 25°-55°
Tiles 15°-55°

Top-hung

• For roof pitches from 55°-75°, please specify special springs when ordering.



55 x 98 66 x 118 78 x 118 78 x 140 134 x 98

C04 F06 M06 M08 U04

Centre-Pivot Roof Windows - pine					
GGL SD5N1 U-value 1.4 W/m²K	GGL 3559 roof window + EDN recessed Flashing for slate up to 8mm thick (min 35° roof pitch)	£451.20	£511.20	£591.60	£628.80
GGL SD5P1 U-value 1.4 W/m²K	GGL 3559 roof window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	£451.20	£511.20	£591.60	£628.80
GGL SD5W1 U-value 1.4 W/m²K	GGL 3559 roof window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	£451.20	£511.20	£591.60	£628.80

Packages include: GHL top-hung roof window with toughened outer pane, glazing bar and suitable flashings.

External frame size (nominal w x h) cm


78 x 140

Top-Hung Roof Windows - pine. Open to 30°. Suitable for emergency escape.		
GHL SD5N1 U-value 1.4 W/m²K	GHL 3559 roof window (opens to 30°) + EDN recessed Flashing for slate up to 8mm thick (min 35° roof pitch)	£712.80
GHL SD5P1 U-value 1.4 W/m²K	GHL 3559 roof window (opens to 30°) + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	£712.80
GHL SD5W1 U-value 1.4 W/m²K	GHL 3559 roof window (opens to 30°) + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	£712.80

Optional glazing bars for standard VELUX Roof Windows


Create a traditional style appearance by adding conservation glazing bars to standard grey VELUX Roof Windows.

- Grey glazing bar to match grey exterior finish of all standard VELUX Roof Windows.



Optional glazing bars for standard windows	C02	C04 M04 U04	F06 M06 S06	M08 U08	P10
Recommend x 2 glazing bars for U04, S06 & U08	ZGA W02 0024 £67.20	ZGA W04 0024 £69.60	ZGA W06 0024 £72.00	ZGA W08 0024 £74.40	ZGA W10 0024 £76.80

Prices valid from February 2011. All prices include VAT

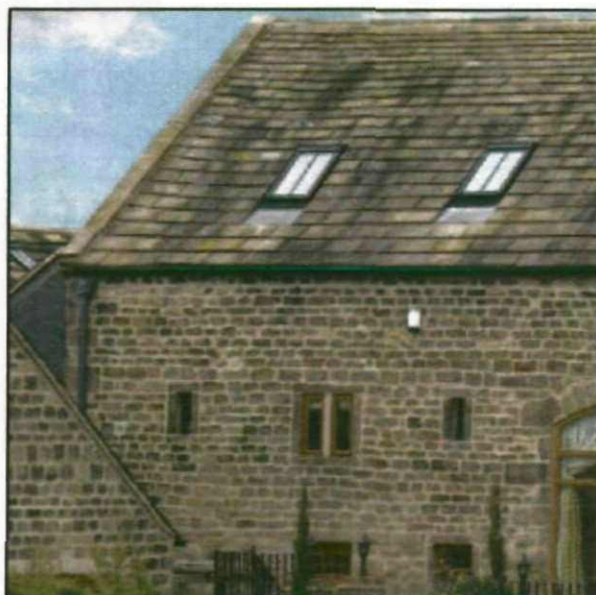

*Collar and Underfelt
Collar
included in all
Conservation Packages*

The VELUX conservation roof window system offers all the superior technical features of a VELUX roof window but in a traditional conservation style. It allows you to make the area under the roof truly habitable – not previously possible with a rooflight. The system blends in perfectly in sensitive conservation areas with its:

- mullion (central glazing bar)
- recessed installation for slate and tiled roofs
- external black metal work.

Centre-pivot

Consisting of a GGL centre-pivot roof window with vertical glazing bar and associated flashing. Three different versions are available depending on the roofing material:

- for slate up to a maximum thickness of 8mm with roof pitches of 35°-90°.
- for profiled roofing material up to a maximum of 120mm in profile with roof pitches of 15°-90°.
- for plain tiles up to 15mm thick with roof pitches of 25°-90°.

<u>Size</u>	<u>Exterior frame</u>	<u>Visible glass</u>	<u>Lining rebate</u>
C04	550 x 978	373 x 730	495 x 919