




BIM Objects
Download

Oatmeal Blend

Product Technical Information Sheet

Wienerberger Code	24190090
Production Plant	Sandown
Manufacture	Extruded Wirecut
Configuration	Vertically perforated unit
Colour	Yellow
Appearance	Dragfaced
Work Size (mm)	215 x 102.5 x 65
Pack Quantity	504
Individual Dry Brick Weight (kg)	1.695

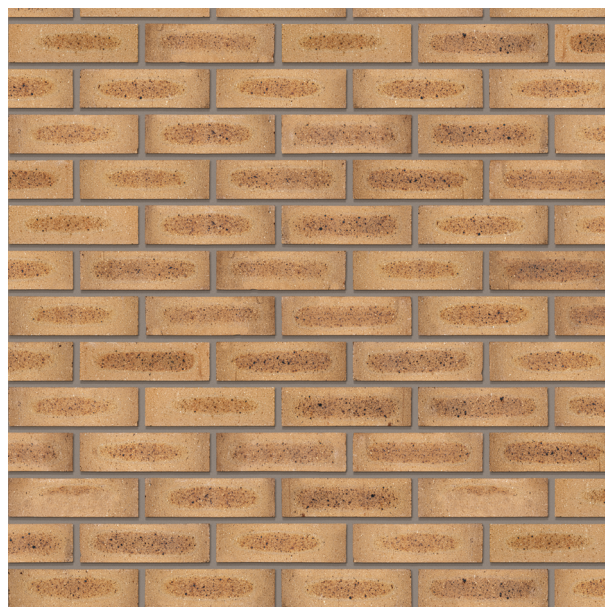

Technical Properties to BS EN 771-1

Size Tolerance (Mean/Range)	T2/R1
Percentage of Voids / Volume of Frogs	41
Gross Dry Density (kg/m ³ /Tolerance)	1190(D1)
Compressive Strength (N/mm ²)	40
Thermal Conductivity (W/(m·K)) λ_{10,dry,unit} Value (EN 1745 tabulated: S1)	P=90% 0.69
Durability Designation	F2
Water Absorption (%)	10
Initial Rate of Water Absorption (kg/(m ² ·min))	Min 0.2 Max 0.8
Active Soluble Salts	S2
Reaction to Fire	A1

Technical data correct at time of issue. Individual dry brick weights can vary and are for guidance only. Any questions regarding this data should be referred to the wienerberger Technical Department. Due to the limitations of screen and print colour representation of product images it is advised that brick samples are viewed prior to ordering.

e. Wall and Landscaping enquiries

t. 0161 491 8200

w. wienerberger.co.uk