



GENERAL NOTES:-
1. DO NOT USE THIS DRAWING IN ISOLATION. THIS DRAWING HAS BEEN PREPARED AS PART OF A SET, AND MUST THEREFORE BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS. ANY DISCREPANCIES OR DESIGN QUERIES MUST BE REPORTED TO THE ENGINEER PRIOR TO COMPLETION OF TENDER AND COMMENCEMENT OF WORKS. FOLLOWING COMPLETION OF TENDER IT IS ASSUMED THAT DEVELOPER AND CONTRACTOR ARE IN FULL AGREEMENT WITH THE DESIGN DRAWINGS (WITH THE EXCEPTION OF PRE TENDER QUERIES ONLY).
2. THIRD PARTY INFORMATION IS USED TO PREPARE THE ENGINEERING DESIGN (INCLUDING ARCHITECTURAL LAYOUT, GROUND INVESTIGATION, EXISTING UTILITIES RECORDS AND SPECIALIST DESIGN ITEMS). THE ENGINEERING DESIGN MUST THEREFORE BE READ IN CONJUNCTION WITH ALL THIRD PARTY INFORMATION PRIOR TO COMMENCING WORK. QUEENSBERRY DESIGN LTD ARE NOT RESPONSIBLE FOR ANY THIRD PARTY INFORMATION OR DETAILS.

HIGHWAYS
1. ALL HIGHWAY WORKS TO BE CARRIED OUT IN ACCORDANCE WITH THE CURRENT LOCAL AUTHORITY DESIGN GUIDE AND SPECIFICATION
2. ALL EXCAVATIONS BELOW PROPOSED AND EXISTING HIGHWAYS TO BE BACK FILLED WITH GRANULAR TYPE 1 SUB-BASE AND WELL COMPACTED LAYERS NOT EXCEEDING 150MM UNLESS OTHERWISE AGREED
3. HIGHWAY AUTHORITY TO BE NOTIFIED BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF WORKS.


ADOPTABLE DRAINAGE
1. ALL ADOPTABLE DRAINAGE WORKS TO BE IN ACCORDANCE WITH THE WATER AUTHORITIES PUBLICATION - "SEWERS FOR ADOPTION 6TH EDITION" AS WELL AS THE APPROVED DRAWINGS.
2. PRECAST CONCRETE MANHOLE RINGS TO COMPLY WITH THE RELEVANT PROVISIONS OF BS5911: PART 200.
3. ALL BRICKWORK TO BE CLASS B ENGINEERING COMPLYING WITH THE RELEVANT PROVISIONS OF BS 3921. CONCRETE BRICKS MAY BE USED IF THEIR SPECIFICATION IS THE SAME AS CLASS B ENGINEERING BRICKS. PLEASE SEEK APPROVAL FROM RELEVANT WATER AUTHORITY BEFORE USING.
4. MANHOLE COVERS AND FRAMES SHALL COMPLY WITH THE RELEVANT PROVISIONS OF BS EN 124 AND BE OF A NON-ROCKING, NON-VENTILATING DESIGN.
5. LADDERS THAT ARE REQUIRED IN TYPE A MANHOLES ARE TO COMPLY WITH "SEWERS FOR ADOPTION 6TH EDITION".
6. CONCRETE MUST BE EITHER C20 SULPHATE RESISTANT PORTLAND CEMENT WITH HIGH STRENGTH CONCRETE TOPPING TO THE BENCHING OR C35 ORDINARY PORTLAND CEMENT.
7. 150MM CONCRETE SURROUND IS REQUIRED AROUND PIPES WHERE THE DEPTH FROM FINISHED SURFACE TO SOFFIT OF PIPE IS LESS THAN 1200MM. THIS MAY BE REDUCED TO 900MM WITHIN OPEN SPACE.
8. THE LOCATION OF EXISTING DRAINAGE THAT IS WITHIN CLOSE PROXIMITY TO THE PROPOSED SITE WORKS, WHICH IS NOT TO BE DIVERTED, SHOULD BE CONFIRMED BY THE CONTRACTOR AND REPORTED TO THE DEVELOPER TO ENSURE IT CORRESPONDS TO THAT SHOWN ON THE ENGINEERING LAYOUT AND THAT NO PROPOSED WORKS ARE AFFECTED.
9. THE POSITION, LINE AND DIAMETER OF ALL EXISTING DRAINAGE APPARATUS SHOULD BE CONFIRMED ON SITE PRIOR TO THE COMMENCEMENT OF THE WORKS. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER IMMEDIATELY.
10. THE CONNECTION OF SOIL AND SURFACE WATER DRAINAGE TO THE EXISTING PUBLIC SEWER SYSTEM SHALL BE SUBJECT TO THE APPROVAL OF THE LOCAL SEWERAGE UNDERTAKER. THE CONTRACTOR IS EXPECTED TO APPLY FOR RELEVANT PERMITS PRIOR TO COMMENCING THE WORK.
11. ROADS AND SEWERS CONTRACTOR MUST INFORM WATER AUTHORITY PRIOR TO WORKS COMMENCING

EXISTING SERVICES
PRIOR TO THE COMMENCEMENT OF ANY WORKS UNDER GROUND MAPPING SURVEYS AND CONSTRAINTS PLAN IS TO BE REFERRED TO ANY DISCREPANCIES ARE TO BE REPORTED TO ENGINEER.


ANY EXISTING SERVICES WHICH MAY BE AFFECTED BY THE PROPOSED WORKS SHOULD BE LOCATED BY MEANS OF A HAND DIG IN CLOSE LIAISON WITH THE STATUTORY SERVICE AUTHORITIES. THE CONTRACTOR SHALL INFORM THE DEVELOPER OF ANY SERVICES THAT MAY AFFECT THE PROPOSED DESIGN. CONTRACTOR TO NOTIFY STATUTORY SERVICE AUTHORITIES PRIOR TO COMMENCEMENT OF WORK. AS CONSTRUCTED INFORMATION IT IS THE CONTRACTORS RESPONSIBILITY TO PROVIDE THE FOLLOWING AS CONSTRUCTED DRAWINGS TO THE DEVELOPER UPON THE COMPLETION OF THE WORKS COVERED BY THE CONTRACT:-
1. POSITION/COORDINATES OF ALL ADOPTABLE MANHOLES.
2. INVERT AND COVER LEVELS OF ALL ADOPTABLE MANHOLES.
3. NEW GULLY POSITIONS AND CONNECTIONS.
4. POSITION AND DEPTH OF SERVICE DUCTS FOR WATER, GAS, ELECTRIC, BT, CABLE AND STREET LIGHTING, STATING SIZE AND NUMBER OF DUCTS.

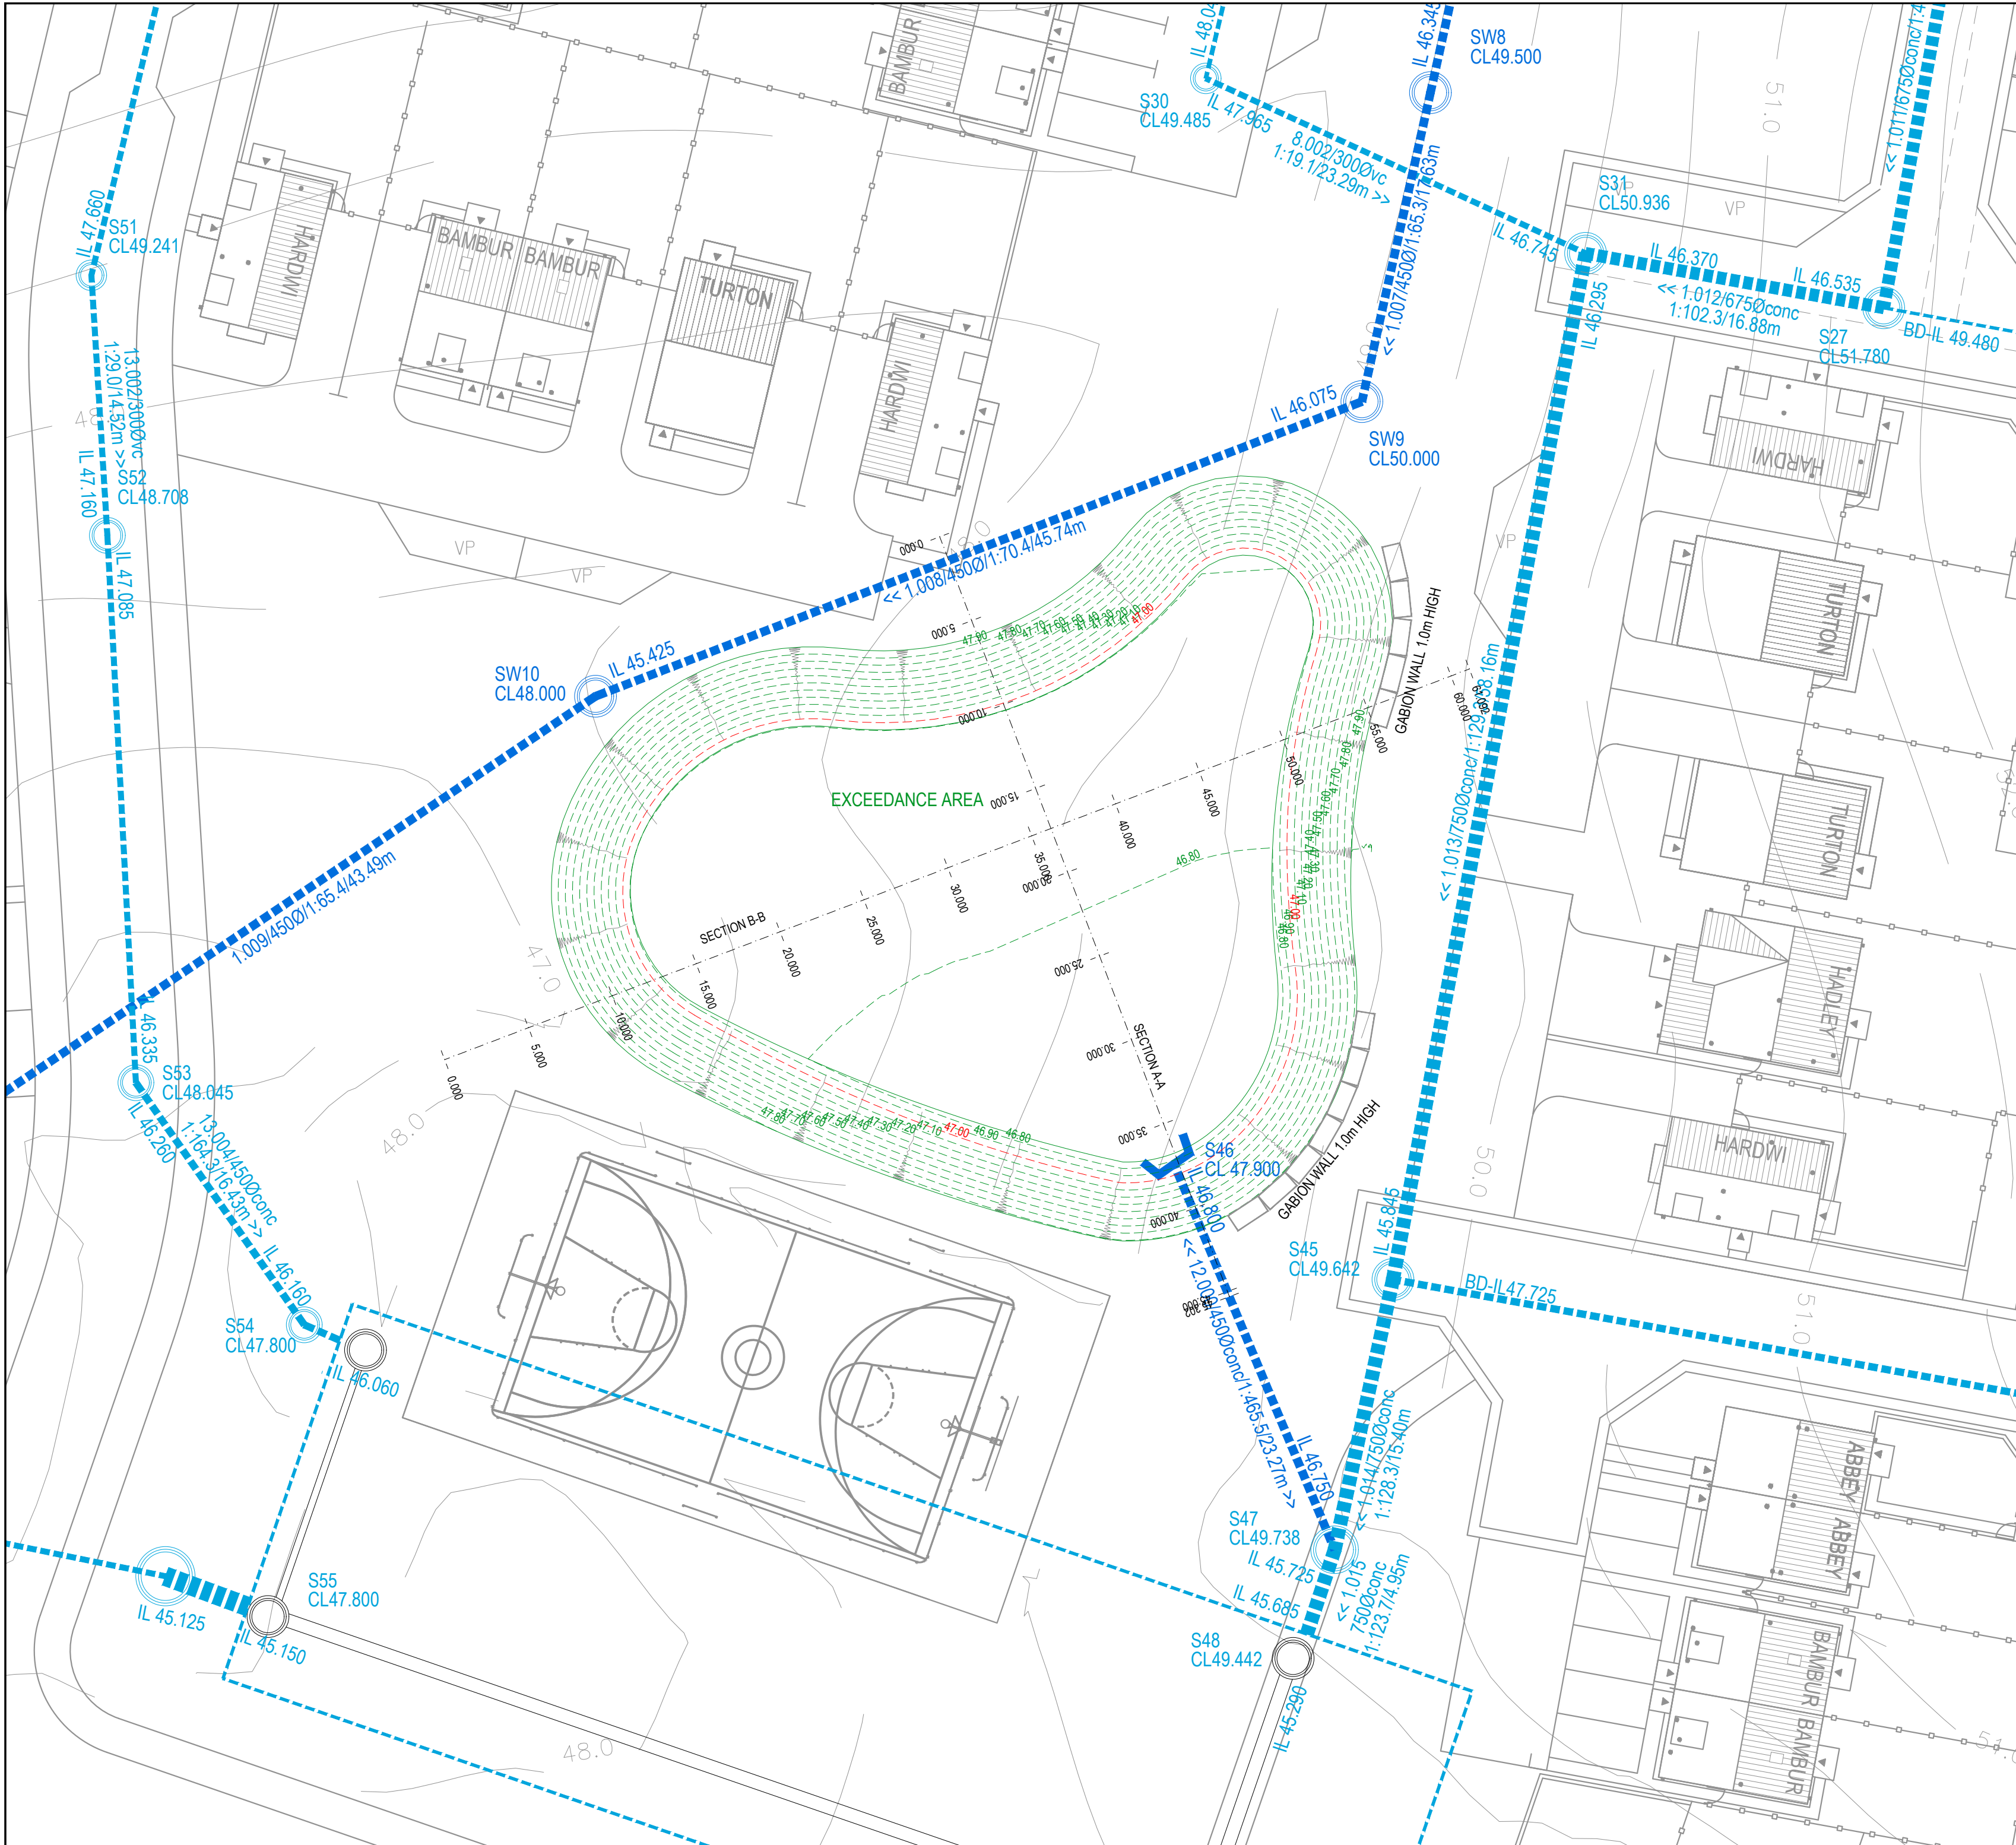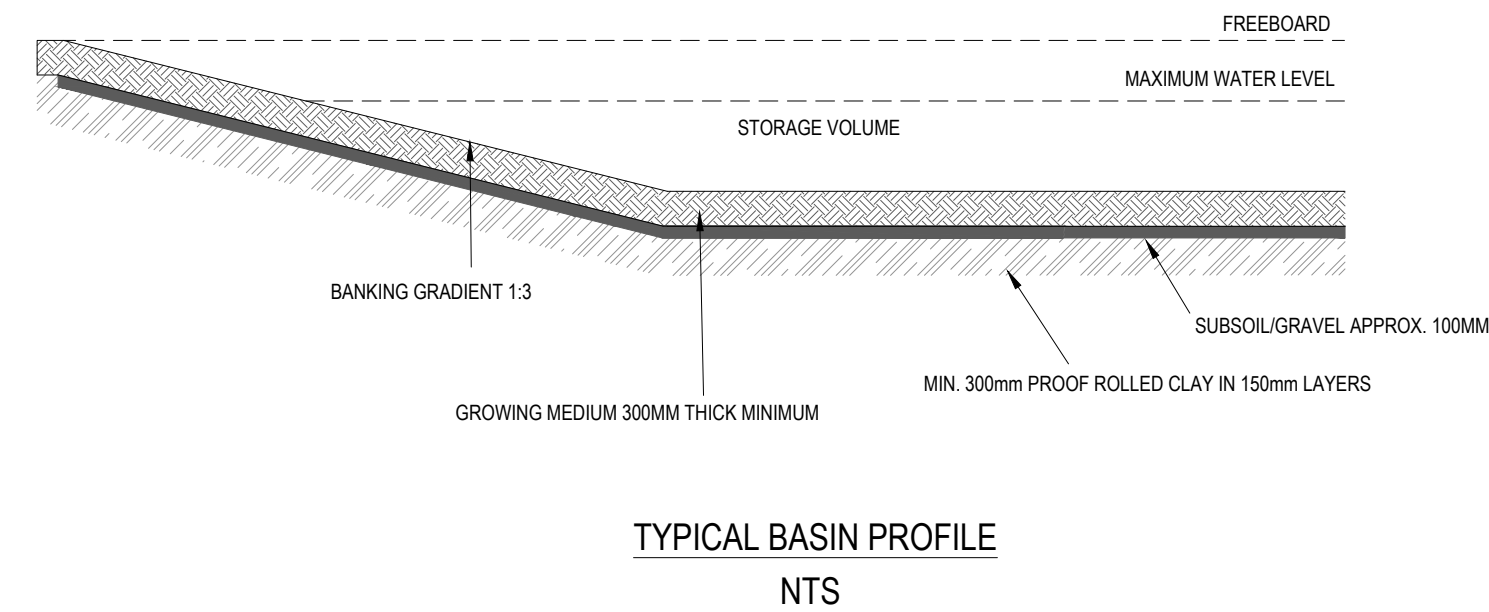

BASIN A-A
Horiz. 1:500
Vert. 1:100
45.00 A.O.D.

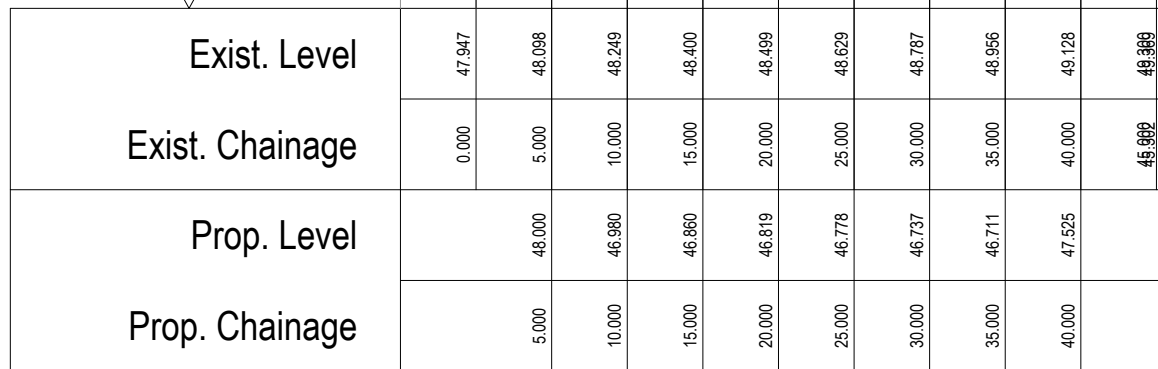

BASIN B-B
Horiz. 1:500
Vert. 1:100
44.00 A.O.D.

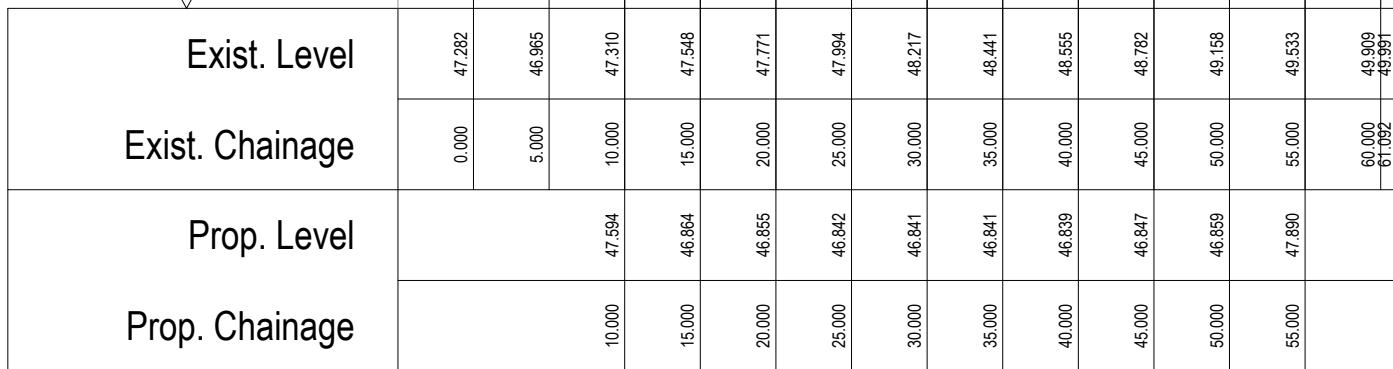

B	10.03.20	RE-DESIGNED TO NEW PLANNING LAYOUT	ND	ND
A	24.01.20	RE-DESIGNED TO NEW PLANNING LAYOUT	ND	ND
-	29.07.19	FIRST ISSUE	ND	ND

Rev.	Date	Revision Details	Drawn	Checked
------	------	------------------	-------	---------

© This drawing is the property of Queensberry Design Limited and the information can only be reproduced with their prior permission.



QUEENSBERRY DESIGN
CIVIL, STRUCTURAL, ARCHITECTURAL & GEOTECHNICAL CONSULTANTS
NORTH EAST OFFICE
SUITE 2A METRO HOUSE, METRO CENTRE,
GATESHEAD, NE11 8NH
T: 0191 480 9000
NORTH WEST & YORKSHIRE OFFICE
2A ST MARTINS LANE, YORK, YO1 6LN
01904 500005
www.queensberrydesign.co.uk

Client	KEEPMOAT HOMES		
Project	THURNSCOE PHASE 3		
Title	EXEDDANCE BASIN GENERAL ARRANGMENT		
Drawn	LP	Checked	ND
Drawing Number	QD1386-03-02		Date
Drawing Status	TENDER	Scale	1:250 - A1
Rev.	B		