

Houghton Green

S38 STREET LIGHTING KEY AND NOTES:

- 1. DENOTES 13NO. - PROPOSED 6 METRE STEEL COLUMN WITH URBIS AXIA 3.1 S270 TYPE 'D' LANTERN AND ELECTRONIC PECU 25.8 WATTS
- 2. DENOTES 2NO. - PROPOSED 6 METRE STEEL COLUMN WITH URBIS AXIA 3.1 S270 TYPE 'E' LANTERN AND ELECTRONIC PECU 8.3 WATTS
- 3. THE DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR ARRANGING THE INSTALLATION OF ANY NEW LV MAINS WITH THE DNO OR A IDNO OF CHOICE.
- 4. STREET LIGHTING INSTALLATIONS WILL REMAIN THE FULL RESPONSIBILITY OF THE DEVELOPER/CONTRACTOR UNTIL THE HIGHWAY ADOPTION STAGE AND SIGNED OFF BY STREET LIGHTING DESIGN. THIS WILL INCLUDE ANY DEFECTS AND PAYMENT OF ALL ENERGY COSTS UNTIL PASSED OVER TO BMCB STREET LIGHTING AT ADOPTION STAGE.
- 5. ALL SETTING OUT AND EXACT POSITIONS TO BE AGREED ON SITE BY BARNESLEY COUNCIL STREET LIGHTING DESIGN ENGINEER PRIOR TO START. ALLOW AT LEAST 7 CLEAR WORKING DAYS NOTICE TO ATTEND SITE. CONTACT VIA EMAIL: STREETLIGHTINGDESIGN@BARNESLEY.GOV.UK
- 6. ENSURE THAT 300MM CLEARANCE WITHOUT ANY SERVICES, TO ALLOW INSTALL OF THE STREET COLUMN
- 7. A DOUBLE POLE OUT-OUT WITH 6A 1ST FUSE MUST BE INSTALLED INTO EACH COLUMN ON THE INCOMING SUPPLY. ANY OTHER REQUIREMENTS MUST BE CONFIRMED AND ACCEPTED BEFORE THE ROAD CAN BE ADOPTED
- 8. NEW STREET LIGHTING COLUMNS ARE TO BE INSTALLED WHEN THE FOOTWAY / VERGE IS UP TO EITHER SUB BASE OR BINDER COURSE LAYERS AND ALL EDGINGS (PIN KERBS) AND ROAD KERBS MUST BE INSTALLED TO ESTABLISH LINE AND LEVEL OF ANY NEW INSTALLATIONS.
- 9. IF A COLUMN INSTALLATION IS URGENTLY NEEDED BEFORE THIS POINT, ONE CAN BE INSTALLED WITH A SIGNATURE FROM THE SITE MANAGER. THIS MOVES ANY RESPONSIBILITY FOR THE INSTALLATION POSITION FROM BMCB TO THE DEVELOPER
- 10. TWO WEEKS NOTICE AND 3 COLUMNS MINIMUM IS REQUIRED FOR COLUMN INSTALLATIONS.

S38 SURFACING PLAN KEY:


- 1. SITE BOUNDARY
- 2. EXTENT OF ADOPTABLE HIGHWAY WORKS
- 3. PROPOSED TYPE 4 ROAD CONSTRUCTION DENSE BITUMEN MACADAM DETAIL SHOWN ON DRAWING NO. 25027-LE-ZZ-ZZ-DR-D-0011
- 4. PROPOSED FOOTWAY, HARD MARGIN AND VEHICLE CROSSINGS DENSE BITUMEN MACADAM DETAIL SHOWN ON DRAWING NO. 25027-LE-ZZ-ZZ-DR-D-0011
- 5. PROPOSED DETERRENT PAVING DETAIL SHOWN ON DRAWING NO. 25027-LE-ZZ-ZZ-DR-D-0011
- 6. PROPOSED TACTILE PAVING DETAIL SHOWN ON DRAWING NO. 25027-LE-ZZ-ZZ-DR-D-0011
- 7. PROPOSED TYPE 5B ROAD CONSTRUCTION / HARD MARGIN CONSTRUCTION BLOCK PAVIORS DETAIL SHOWN ON DRAWING NO. 25027-LE-ZZ-ZZ-DR-D-0011
- 8. ROAD GULLY AND LEAD

1. THESE NOTES ARE INTENDED TO AUGMENT DRAWINGS AND SPECIFICATIONS. WHERE CONFLICT OF REQUIREMENTS EXIST THE ORDER OF PRECEDENCE SHALL BE AS SHOWN IN THE SPECIFICATION. OTHERWISE THE STRICTEST PROVISION SHALL GOVERN.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ENGINEERS AND ARCHITECTS DRAWINGS.
3. DRAWINGS NOT TO BE SCALED. ALL DIMENSIONS TO BE CHECKED ON SITE BY THE CONTRACTOR. ANY DISCREPANCIES TO BE NOTIFIED TO THE ENGINEER AND FURTHER INSTRUCTIONS OBTAINED BEFORE WORK IS COMMENCED.
4. LEVELS AT THE END TO EXISTING ROAD CONSTRUCTION TO BE CONFIRMED. ANY DISCREPANCIES TO BE NOTIFIED TO THE ENGINEER.
5. ALL WORKS TO BE IN ACCORDANCE WITH THE LOCAL HIGHWAY AUTHORITY'S CONSTRUCTION GUIDE.
6. THE WORKS WILL BE ADOPTED BY THE HIGHWAY AUTHORITY. THE DEVELOPER AND/OR PRINCIPAL CONTRACTOR MUST THEREFORE ENSURE THAT THE WHOLE WORKS COMPLY BOTH WITH THE SPECIFICATION AND THE DRAWINGS WHICH ARE SUBJECT TO INSPECTION AND APPROVAL BY THE RELEVANT AUTHORITY.
7. WHERE REQUIRED BY THE LOCAL HIGHWAY AUTHORITY, THE CONTRACTOR SHALL NOTIFY THE APPROPRIATE AUTHORITY PRIOR TO COMMENCEMENT OF EACH STAGE OF THE WORK FOR THEIR REPRESENTATIVE TO CARRY OUT INSPECTION TO ENSURE COMPLIANCE WITH THEIR SPECIFICATION AND APPROVED DETAILS. IF ANY SUCH REQUESTS OR INSTRUCTIONS CAUSE CONFLICT WITH THE SPECIFICATION THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER.
8. ALL MATERIAL WITHIN 450mm OF THE FINISHED CARRIAGEWAY SURFACE SHALL BE NON-FROST SUSCEPTIBLE AS REQUIRED BY S.L.W. SERIES 800 CLAUSE 801.
9. GENERALLY ALL WORKS TO BE UNDERTAKEN IN ACCORDANCE WITH 'THE MANUAL OF CONTRACT DOCUMENTS FOR HIGHWAY WORKS - VOLUME 1 - SPECIFICATION FOR HIGHWAY WORKS (S.H.W.)'
10. CLAUSES SHOWN ON THE DRAWING REFER TO CLAUSES IN THE UK GOVERNMENT'S MANUAL OF CONTRACT DOCUMENTS FOR HIGHWAY WORKS, VOLUME 1 SPECIFICATION OF HIGHWAY WORKS.
11. THE CONTRACTOR IS RESPONSIBLE FOR ACQUIRING UP TO DATE SERVICE INFORMATION AND SHALL TAKE ALL NECESSARY MEASURES TO IDENTIFY AND LOCATE EXISTING UNDERGROUND SERVICES INCLUDING ANY PRIVATE SUPPLIES, AND IMPLEMENT APPROPRIATE CONTROL MEASURES BEFORE UNDERTAKING ANY EXCAVATIONS.
12. SAFE DIGGING PRACTICES MUST BE USED WHEN ESTABLISHING THE ACTUAL POSITION OF MAINS PIPES, SERVICES AND OTHER APPARATUS ON SITE BEFORE ANY MECHANICAL PLANT IS USED.
13. CGRS TO BE TAKEN ON ROAD FORMATION, AT 20m INTERVALS USING 600mm DIAMETER PLATE. RESULTS OF WHICH ALONG WITH A LOCATION PLAN IS TO BE PRESENTED TO BMCB ENGINEER TO REVIEW.
14. ANY TREES WITHIN 3.66m OF THE PROSPECTIVELY ADOPTABLE HIGHWAY WILL REQUIRE A ROOT BARRIER - SEE CONSTRUCTION ENGINEERS TO REVIEW.
15. CCTV OF HIGHWAY DRAINAGE TO BE PROVIDED TO BMCB FOR REVIEW PRIOR TO A PART 1 CERTIFICATE AND PRIOR TO FINAL SURFACING.

THE INFORMATION ON THIS DRAWING IS FOR APPROVAL PURPOSES ONLY. NO CONSTRUCTION WORKS ARE TO BE UNDERTAKEN UNTIL WRITTEN APPROVAL IS RECEIVED FROM LOCAL HIGHWAYS AUTHORITY.

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE FOLLOWING DRAWING REFERENCE 25027/:

- SECTION 38
- 0001-0002 - SECTION 38 - AGREEMENT PLAN
  - 0003-0004 - SECTION 38 - SURFACING PLAN
  - 0005-0006 - SECTION 38 - KERBING PLAN
  - 0007-0008 - SECTION 38 - PROPOSED LEVELS PLAN
  - 0009-0010 - SECTION 38 - VEHICLE TRACKING
  - 0011 - SECTION 38 - HIGHWAYS CONSTRUCTION DETAILS
  - 0013-0014 - SECTION 38 - GULLY AREAS PLAN
  - 0015 - SECTION 38/104 - HIGHWAY DRAINAGE PLAN
  - 0017-0018 - SECTION 38 - ROAD MARKINGS AND TRAFFIC SIGNS

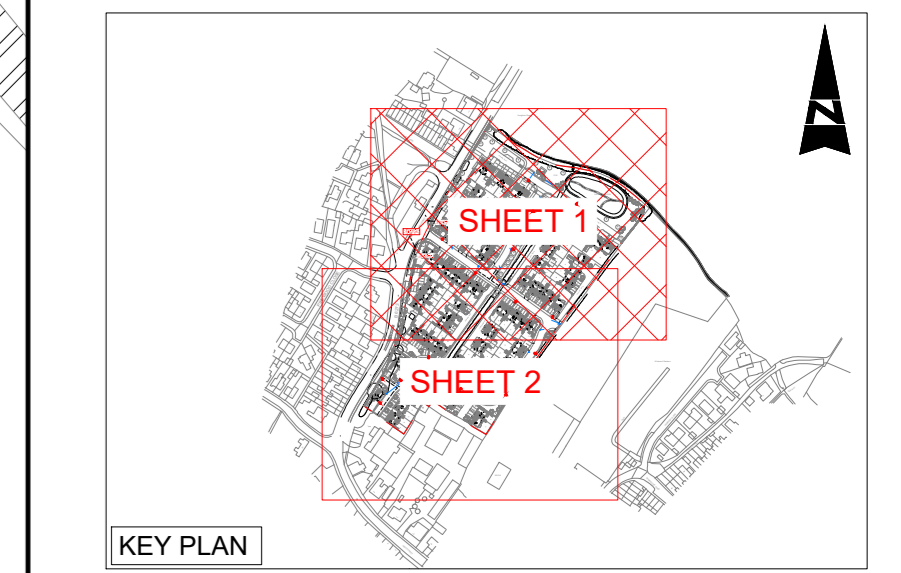

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK SET OUT ON THIS DRAWING, NOTE THE FOLLOWING SIGNIFICANT RESIDUAL RISKS

Ref	Description	By	Date	Chk'd	Auth
S4	FOR APPROVAL		06.02.26	CK	
S4	FOR APPROVAL		08.01.26	CK	
S4	FOR APPROVAL		06.11.25	CK	
S4	FOR APPROVAL		14.10.25	CK	
S4	FOR APPROVAL		30.06.25	RSJ	
Start	Purpose of Issue		Date		Auth

R03	UPDATED FOLLOWING LA COMMENTS	WD	06.02.26	CK	CK
R04	UPDATED FOLLOWING LA COMMENTS	WD	08.01.26	CK	CK
R03	UPDATED LAYOUT	WD	06.11.25	CK	CK
R02	UPDATED LAYOUT	WD	14.10.25	CK	CK
R01	FIRST ISSUE	WD	30.06.25	CK	RSJ

**LYNAS ENGINEERS**

Lynas Engineers  
Cargo Fleet Offices  
Middlesbrough Road  
Middlesbrough  
TS6 6XH  
Tel: +44 (0)1642 720280  
www.lynasesengineers.com  
Copyright © Lynas Engineers Limited (2025)

**AVANT homes**

Project: GREAT HOUGHTON BARNESLEY

Title: SECTION 38 - SURFACING PLAN SHEET 1

Sheet	Size	Original Scale	Design/Drawn	Checked	Authorised
A0		1:250	WD	CK	RSJ
Date	Date	Date	Date	Date	Date
30.06.25	30.06.25	30.06.25	30.06.25	30.06.25	30.06.25

Status	Drawing Number	Rev
S4	25027-LE-ZZ-ZZ-DR-D-0003	P05

ALL WORKS OUTSIDE OF THE SECTION 38 BOUNDARY - DENOTED BY THE GREEN DASHED LINE - ARE SUBJECT TO A S278 AGREEMENT

S278 GULLY LOCATION SHOWN FOR INFORMATION - SUBJECT TO S278 APPROVAL

S278 GULLY LOCATION SHOWN FOR INFORMATION - SUBJECT TO S278 APPROVAL

A0 DO NOT SCALE