
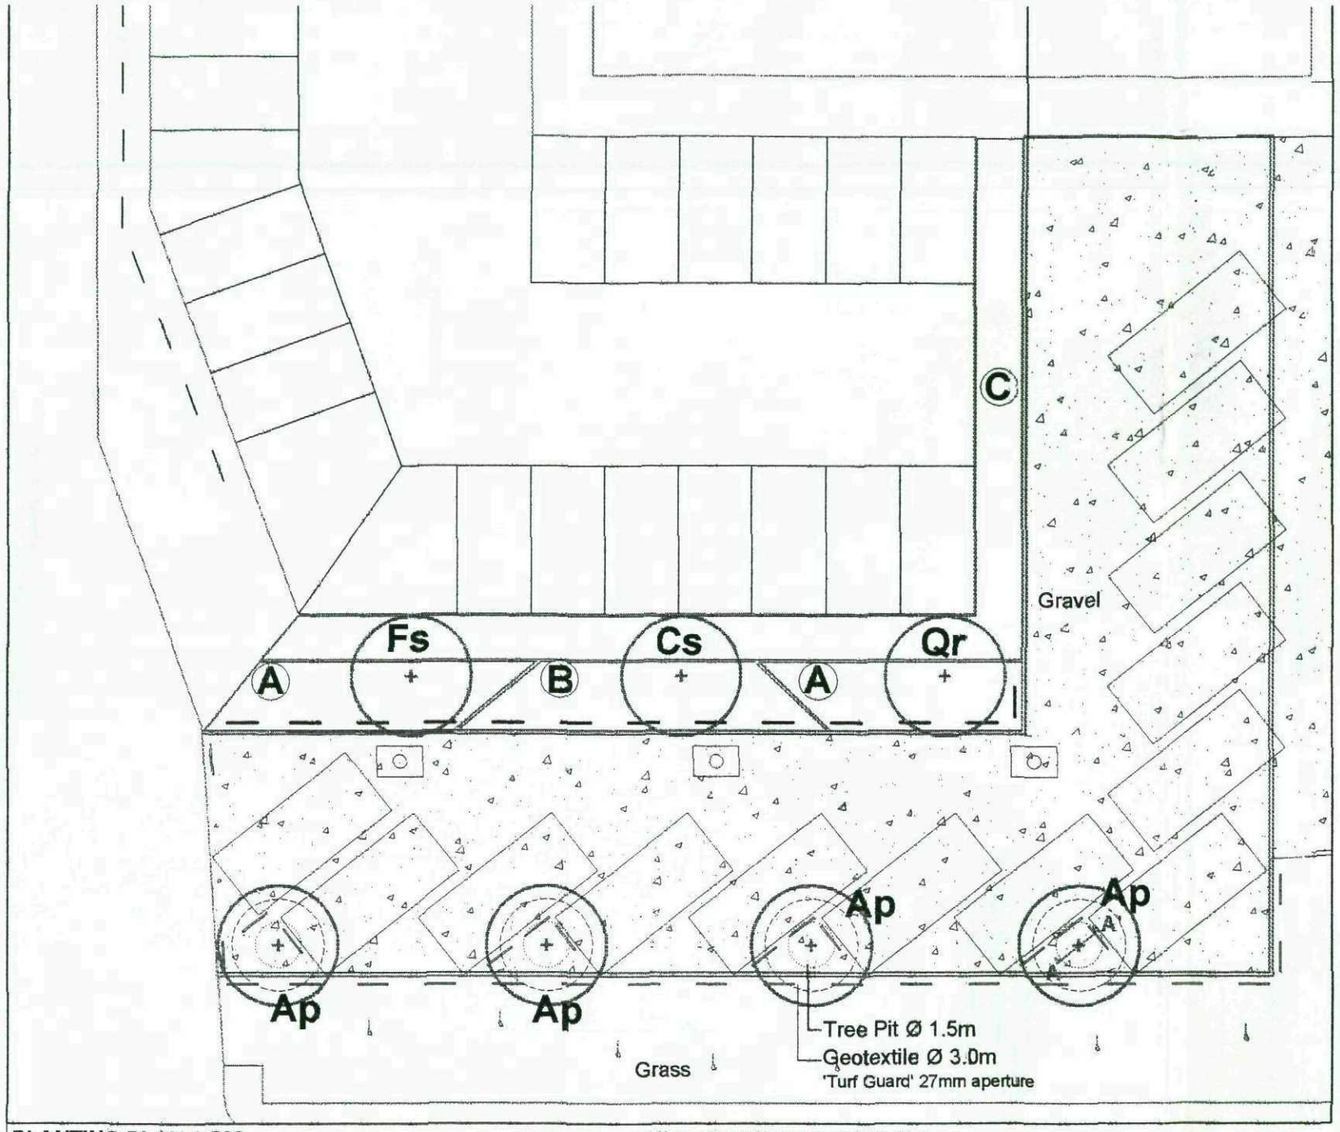


PLANTING PLAN 1:200

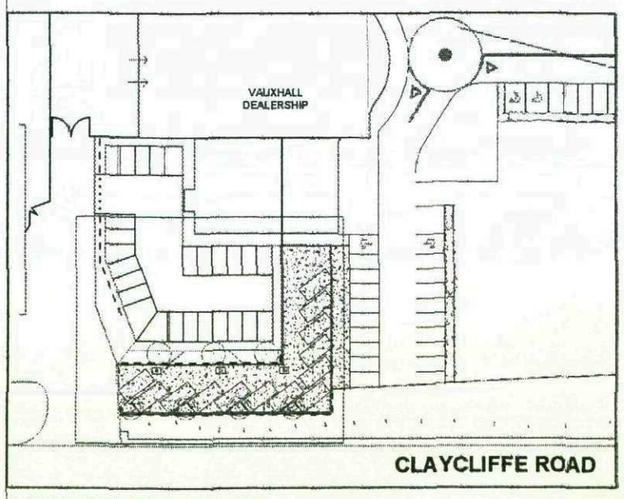


LOCATION PLAN 1:1000

TREE PLANTING SCHEDULE

Ref	Species	Form	Girth	Height	Root	Breaks	Tot. No.
Ap	Acer platanoides	EHS	14-16	425-600	B	4	4
Cs	Castanea sativa	EHS	14-16	425-600	RB	4	1
Fs	Fagus sylvatica	EHS	14-16	425-600	RB	5	1
Qr	Quercus robur	EHS	14-16	425-600	RB	4	1

ORNAMENTAL SHRUB MIX

Species	Height (cm)	Root	Size/Age	Habit	Breaks	Plants per msq.	Planting Area %	Total No.
Mix A (Tot. area:36 msq)								
Berberis x ottawensis 'Superba'	40-60	C	3L	B	3	3	40	43
Euonymus fortunei 'Emerald n Gold'	20-30	C	3L	Bu	7	5	20	36
Lonicera nitida	30-40	C	2L	Bu	3	3	40	43
(Planted in groups of 5-7)								
Mix B (Tot. area:21 msq)								
Cornus alba 'Elegantissima'	60-80	C	3L	B	3	2	20	8
Cornus sanguinea 'MidWinter Fire'	40-60	C	3L	B	3	3	20	13
Euonymus fortunei 'Silver Queen'	20-30	C	3L	Bu	7	5	30	32
Lonicera nitida	30-40	C	2L	Bu	3	3	30	19
(Planted in groups of 5-7)								
Mix C (Tot. area:58 msq)								
Symphoricarpos x chenaultii 'Hancock'	40-60	C	3L	B	5	3	100	174

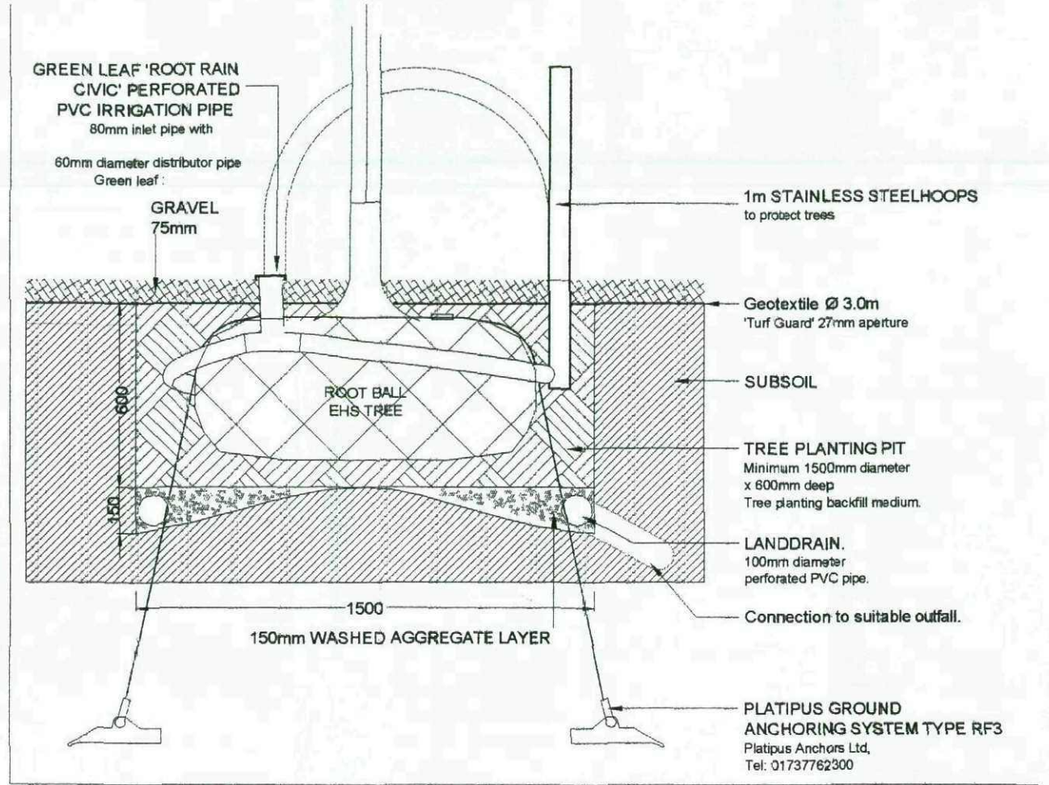

SECTION A-A' TREE PIT 1:20

OUTLINE SPECIFICATION:

GENERAL
All works to be in accordance all relevant British Standards and the Landscape Consultant's planting plans and specification (to be issued) and in compliance with the National Landscape Specification (NBS) 1998, latest revision.

SETTING OUT
All dimensions and levels should be checked and adjusted on site. Contractor responsible for care around all services. Do not scale from this drawing.

SITE PREPARATION
Building rubble in excess of 50mm dimension to be removed, compaction ripped 150mm deep or broken out by JCB backhector leaving surface rough. Ensure free drainage.

TOPSOIL
General purpose Grade topsoil BS:3882 medium loam, not more than slightly stoney. pH 5.7-7.5.
Depth 450mm all planting areas. 150mm to all other areas.
1 litre sample of topsoil should be sent to Weddles office for pH testing and approval.

TREE PIT
Extra Heavy Standard 1800mmØ x 600mm depth
Geotextile Ø 3.0m 'Turf Guard' 27mm aperture as supplied by Tensar International Tel: 01254 262431 or similar

PREPARATORY HERBICIDE
Weed allowed to grow and treated with up to three applications glyphosate prior to cultivation or planting during the fallow period.

GRASSING
Grassing between April-October.
Cultivate to prepare seed bed. Finished seed bed levels 25mm above pavings and kerb edges. Stones pick to 25mm.
Pre-seeding fertiliser 50gm2. Grass mix chosen for low maintenance requirements:-
GRASS SEED fdlX from DLF Trifolium Tel: 01386 791102:
LOW MAINTENANCE 'Pro85 DOT Road verge mix EngSMs'

PLANTS
General
Plant material in accordance with the HTA's National Plant Specification 1997. All plants container grown, well formed and free from disease. Plant handling to CPSE Plant Handling Code.

Quality as supplied by:
Johnsons of Whixley Ltd, York YO26 8AQ. Tel: 01423 330254.
Or other nursery listed in the Horticultural Trades Association Nursery Certification Scheme.

Planting
Plant November to March.
Planting areas cultivated 150 mm deep and stone picked of material greater than 50mm. Plant material pit planted 300 x 300 x 200 minimum. Approved planting compost incorporated into the soil during planting.

Backfill mix	Enviag	PI	Compost
Extra Heavy Standard	200g	50g	100litres
Shrubs	35g	5g	10 litres

Incorporated into soil during planting.

TREE STAKING
Extra Heavy Standard - Short double staking
Preserved softwood 75mm min diameter.
Driven vertically 450mm on either side.
Cross bar - timber, as stake.
Tie to cross bar with flexible webbing

Extra Heavy Standard - underground anchoring system as supplied by www.platipus-anchors.com Tel: 01737 762300 installation as recommended by manufacturer.
RF2 for EHS 22-45cm@4.5-7.5mH

MULCH
Total cover coarse bark mulch to shrub areas, Melcourt Bark Nuggets 75mm deep.

AFTERCARE
24 months aftercare by planting contractor. Including grass cutting, weed, pest and disease control, pruning and watering.

Weed control by residual herbicide to a weed free condition around plants. Spot treat with glyphosate and hand weed as necessary.

Watering 10 litres per plant in periods of drought.

DEFECTS LIABILITY
Twenty-four months on plant material and grass.
Replacements in November in year of loss.

ONGOING MAINTENANCE
Continue to maintain for five years from completion of planting by hand weeding and spot treatment of glyphosate herbicide to any weed in planted areas until plants close canopies. Replace failures for 5 years.

Pruning to take place annually in May

Revisions:

Rev A: Revised to BMBC's comments of 22 May 2008. MY May 2008

Based on GD DESIGN GROUP drawing 1074-PVB/CV 01 Rev. C

Weddle Landscape Design
LANDSCAPE ARCHITECTURE
ENVIRONMENTAL PLANNING
Mews Studio, Charnwood House, 8 Kenwood Bank, Sheffield S7 1NU
Tel (0114) 250 1181
Fax (0114) 250 1188
www.weddles.co.uk mail@weddles.co.uk

Job: PERRYS VAUXHALL BARNSLEY

Title: PLANTING PLAN

scale@A3	drawn	date	job number	number	revision
as shown	VM	MAY 08	284	PVB01	A