




EXISTING FRONT ELEVATION




PROPOSED FRONT ELEVATION

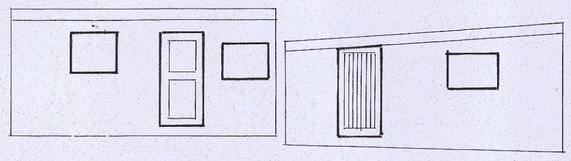


EXISTING SIDE ELEVATION

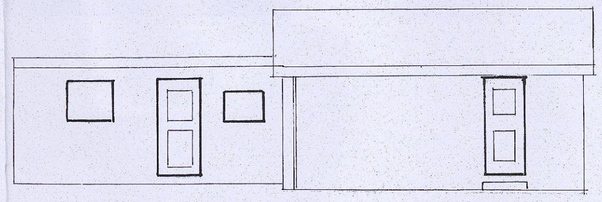

PROPOSED SIDE ELEVATION




EXISTING REAR ELEVATION




PROPOSED REAR ELEVATION


ELEVATIONS SCALE 1:100

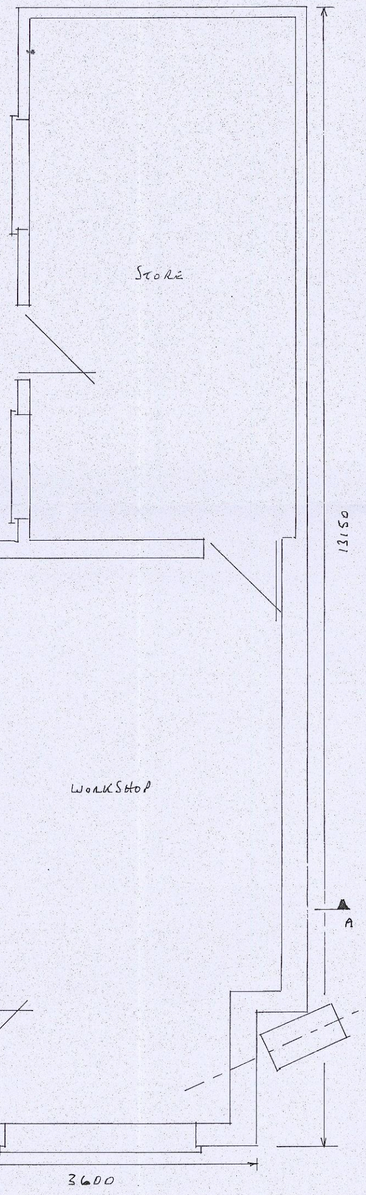


PROPOSED GROUND FLOOR PLAN SCALE 1:50

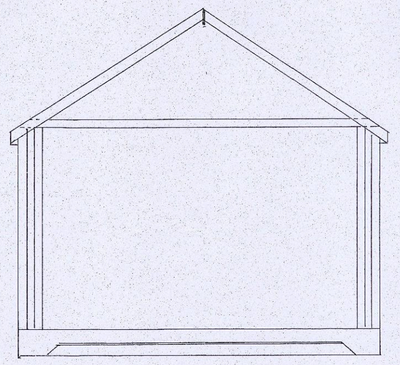


SECTION THRU' A-A SCALE 1:50

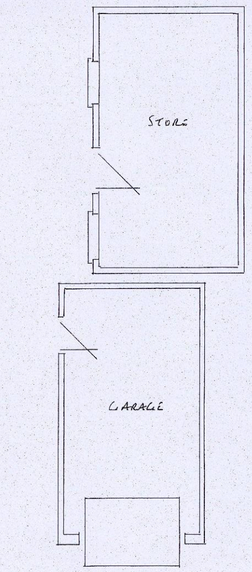


EXISTING GROUND FLOOR PLAN SCALE 1:100

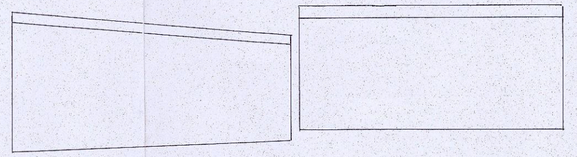

EXISTING SIDE ELEVATION

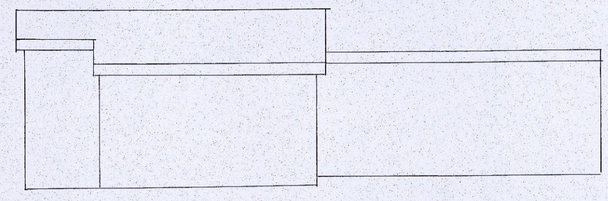

PROPOSED SIDE ELEVATION

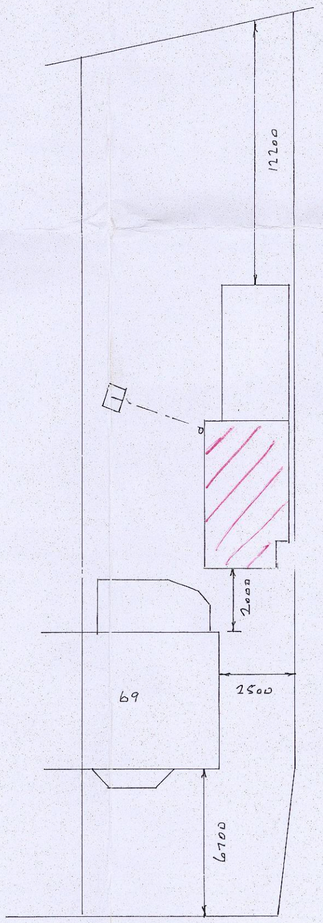

SITE PLAN SCALE 1:200

FOUNDATION/FLOOR

- 150mm COMPACTED HARDCORE • 25mm SAND BLINDING • 1200 GAUGE VISQUEEN • 150mm CONCRETE THICKENED TO 250mm TO PERIMITER WITH A "POLISHED" FINISH

WALLS

- BRICKWORK TO MATCH EXISTING • 100mm LWT. CONC. BLOCKS • 50mm CAVITY FILLED WITH DRITHERM INSULATION • HORIZONTAL DPC 150mm ABOVE G.L. 150mm DPC'S TO REVEALS • CL 50/100 LINTELS OVER EXTERNAL OPENINGS • STAINLESS STEEL TIE WIRES PLACED 750mm HORIZONTALLY 450mm VERTICALLY & 225mm TO REVEALS • EXTERNAL REVEALS TO BE 5MIN

ROOF

- 100 x 50mm WALLPLATE • 170x50mm CEILING JOISTS • 200x25mm RIDGE BOARD
- 170 x 50mm RAFTERS AT 400mm CENTRES • 1m HOLDING DOWN STRAPS EVERY 3 RAFTERS
- 1m LATERAL RESTRAINT STRAPS TO HORIZONTAL & CUT UPS EVERY 1.5m WITH NOGGINS TO SUPPORT
- 6mm EXTERIOR PLY SOFFIT WITH 25mm CONTINUOUS FLY PROOF MESH • 200 x 25mm FASCIA
- REINFORCED BITUMEN FELT • 38x25mm TILE BATTENS • ROOF TILES TO MATCH EXISTING WITH TILE VENTS EVERY 2m • 10mm EAVES VENTS • CODE LEAD FLASHING TO CONNECT TO STORE

DRAINS

- 100mm RWG & 65mm RWP SW TO CONNECT TO EXISTING SW DRAIN OR TO A SOAKAWAY 5m AWAY FROM BUILDING & 1m³ BELOW INVERT LEVEL

GENERAL

- ALL ELECTRICAL WORK TO MEET REQUIREMENTS OF PART P ELECTRICAL SAFETY & MUST BE DESIGNED INSTALLED INSPECTED & TESTED BY A COMPETENT PERSON REGISTERED UNDER THE COMPETENT PERSON SCHEME. A COPY OF THE BUILDING REGS SELF CERTIFICATE IS TO BE GIVEN TO THE LA ON COMPLETION OF THE WORK.

BMBC
CORPORATE MAIL ROOM
15 NOV 2013
Received by: .....
ORIGINAL COPY

PROPOSED WORKSHOP CONVERSION AT:-

69 LIMESWAY

GAWBER

BARNSLEY