NOTE

A/D ACCESS DOORS TO BE INSTALLED ON THE DUCTWORK AT MAXIMUM 3 METRE CENTRES FOR FUTURE CLEANING OF THE SYSTEM.

ANTI-VIBRATION MOUNTS TO BE INSTALLED ON ALL SUPPORTS AND PLANT TO AVOID NOISE TRANSFER THROUGH THE STRUCTURE.

EXTRACT DUCTWORK TO BE PROVIDED WITH ACCESS DOORS AT MAX 2 METRE CENTRES TO ASSIST FUTURE CLEANING - CLEANING CONTRACTORS MAY ADVISE ADDITIONAL DOORS.

SYSTEM CLEANING TO BE CARRIED OUT BY A BESA APPROVED CLEANING CONTRACTOR WHO SHOULD BE APPOINTED WITHIN 6 WEEKS OF THE STORE OPENING TO CARRY OUT A RISK ASSESSMENT FOR THE SYSTEM - SEE SPECIFICATION FOR RECOMMENDED MAINTENANCE INTERVALS, SEE ACCOMPANYING SPECIFICATION.

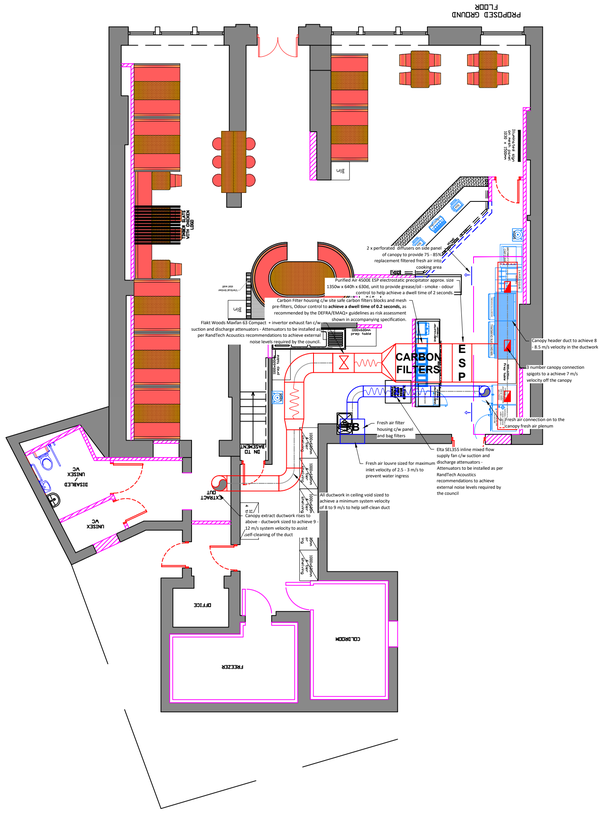

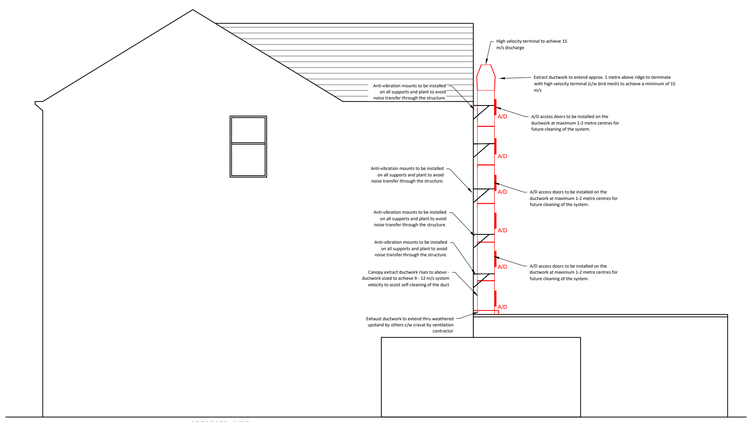

PROPOSED SIDE ELEVATION

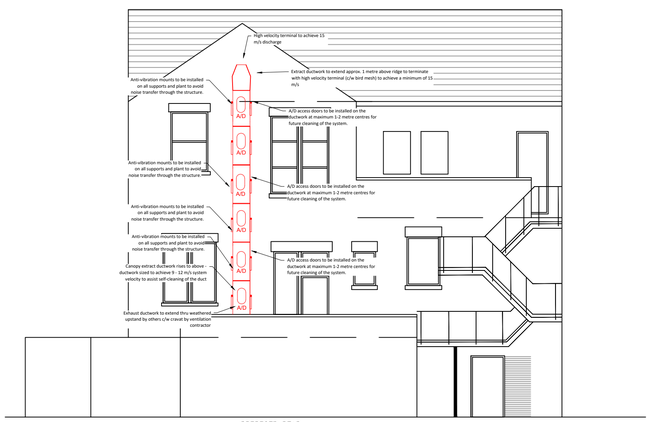

PROPOSED REAR ELEVATION

VENTILATION LAYOUTS ARE INDICATIVE ONLY FINAL LAYOUT MAY DIFFER ONCE SITE MEASURED BUT EQUIPMENT SELECTIONS TO REMAIN AS DESIGN TO ENSURE NOISE AND ODOUR CONTROL ARE ACHIEVED IN LINE WITH PLANNING/LANDLORD APPROVAL

COPYRIGHT: PLEASE NOTE THAT THIS DESIGN IS THE COPYRIGHT OF KRS STEEL SERVICES LTD AND MUST NOT BE COPIED IN PART OR IN FULL WITHOUT THE WRITTEN CONSENT OF KRS STEEL SERVICES LTD, NOR MUST THEY BE PASSED TO A THIRD PARTY IN ANY FORM, UNDER ANY CIRCUMSTANCES

Revision	Date	By	Note
Revision	F		
Revision	E		
Revision	D		
Revision	C		
Revision	B		
Revision	A		

KRS STEEL SERVICES LTD
UNIT 6, MEADWAY TRADING ESTATE
429 THE MEADWAY
KITTS GREEN
BIRMINGHAM B33 ODZ

Tel: 0121 783 7404 Fax: 0121 786 6803

CLIENT
Pepes Barnsley

JOB TITLE
Pepes
32 Peel Street
Barnsley
S70 2RE

DRAWING
Proposed Canopy Extract and Fresh Air Supply Ventilation Layout

SCALE	DATE	DRAWN
1:100 @ A1	11/03/2025	JG

DRAWING NO.	REV
6525(P)/M01	