


PROJECTING SIGNAGE
New 2no internally illuminated projecting signs. External fascia 2.5mm folded aluminium face trays with returns fitted back to back, powdercoated black RAL 9017 satin black and PMS green 368c. backed up with bonded stud and VHB tape. illuminated via white LEDs, max illumination 400cd/m² – subject to Signage Contractors details & all necessary statutory approvals



SECTION KEY

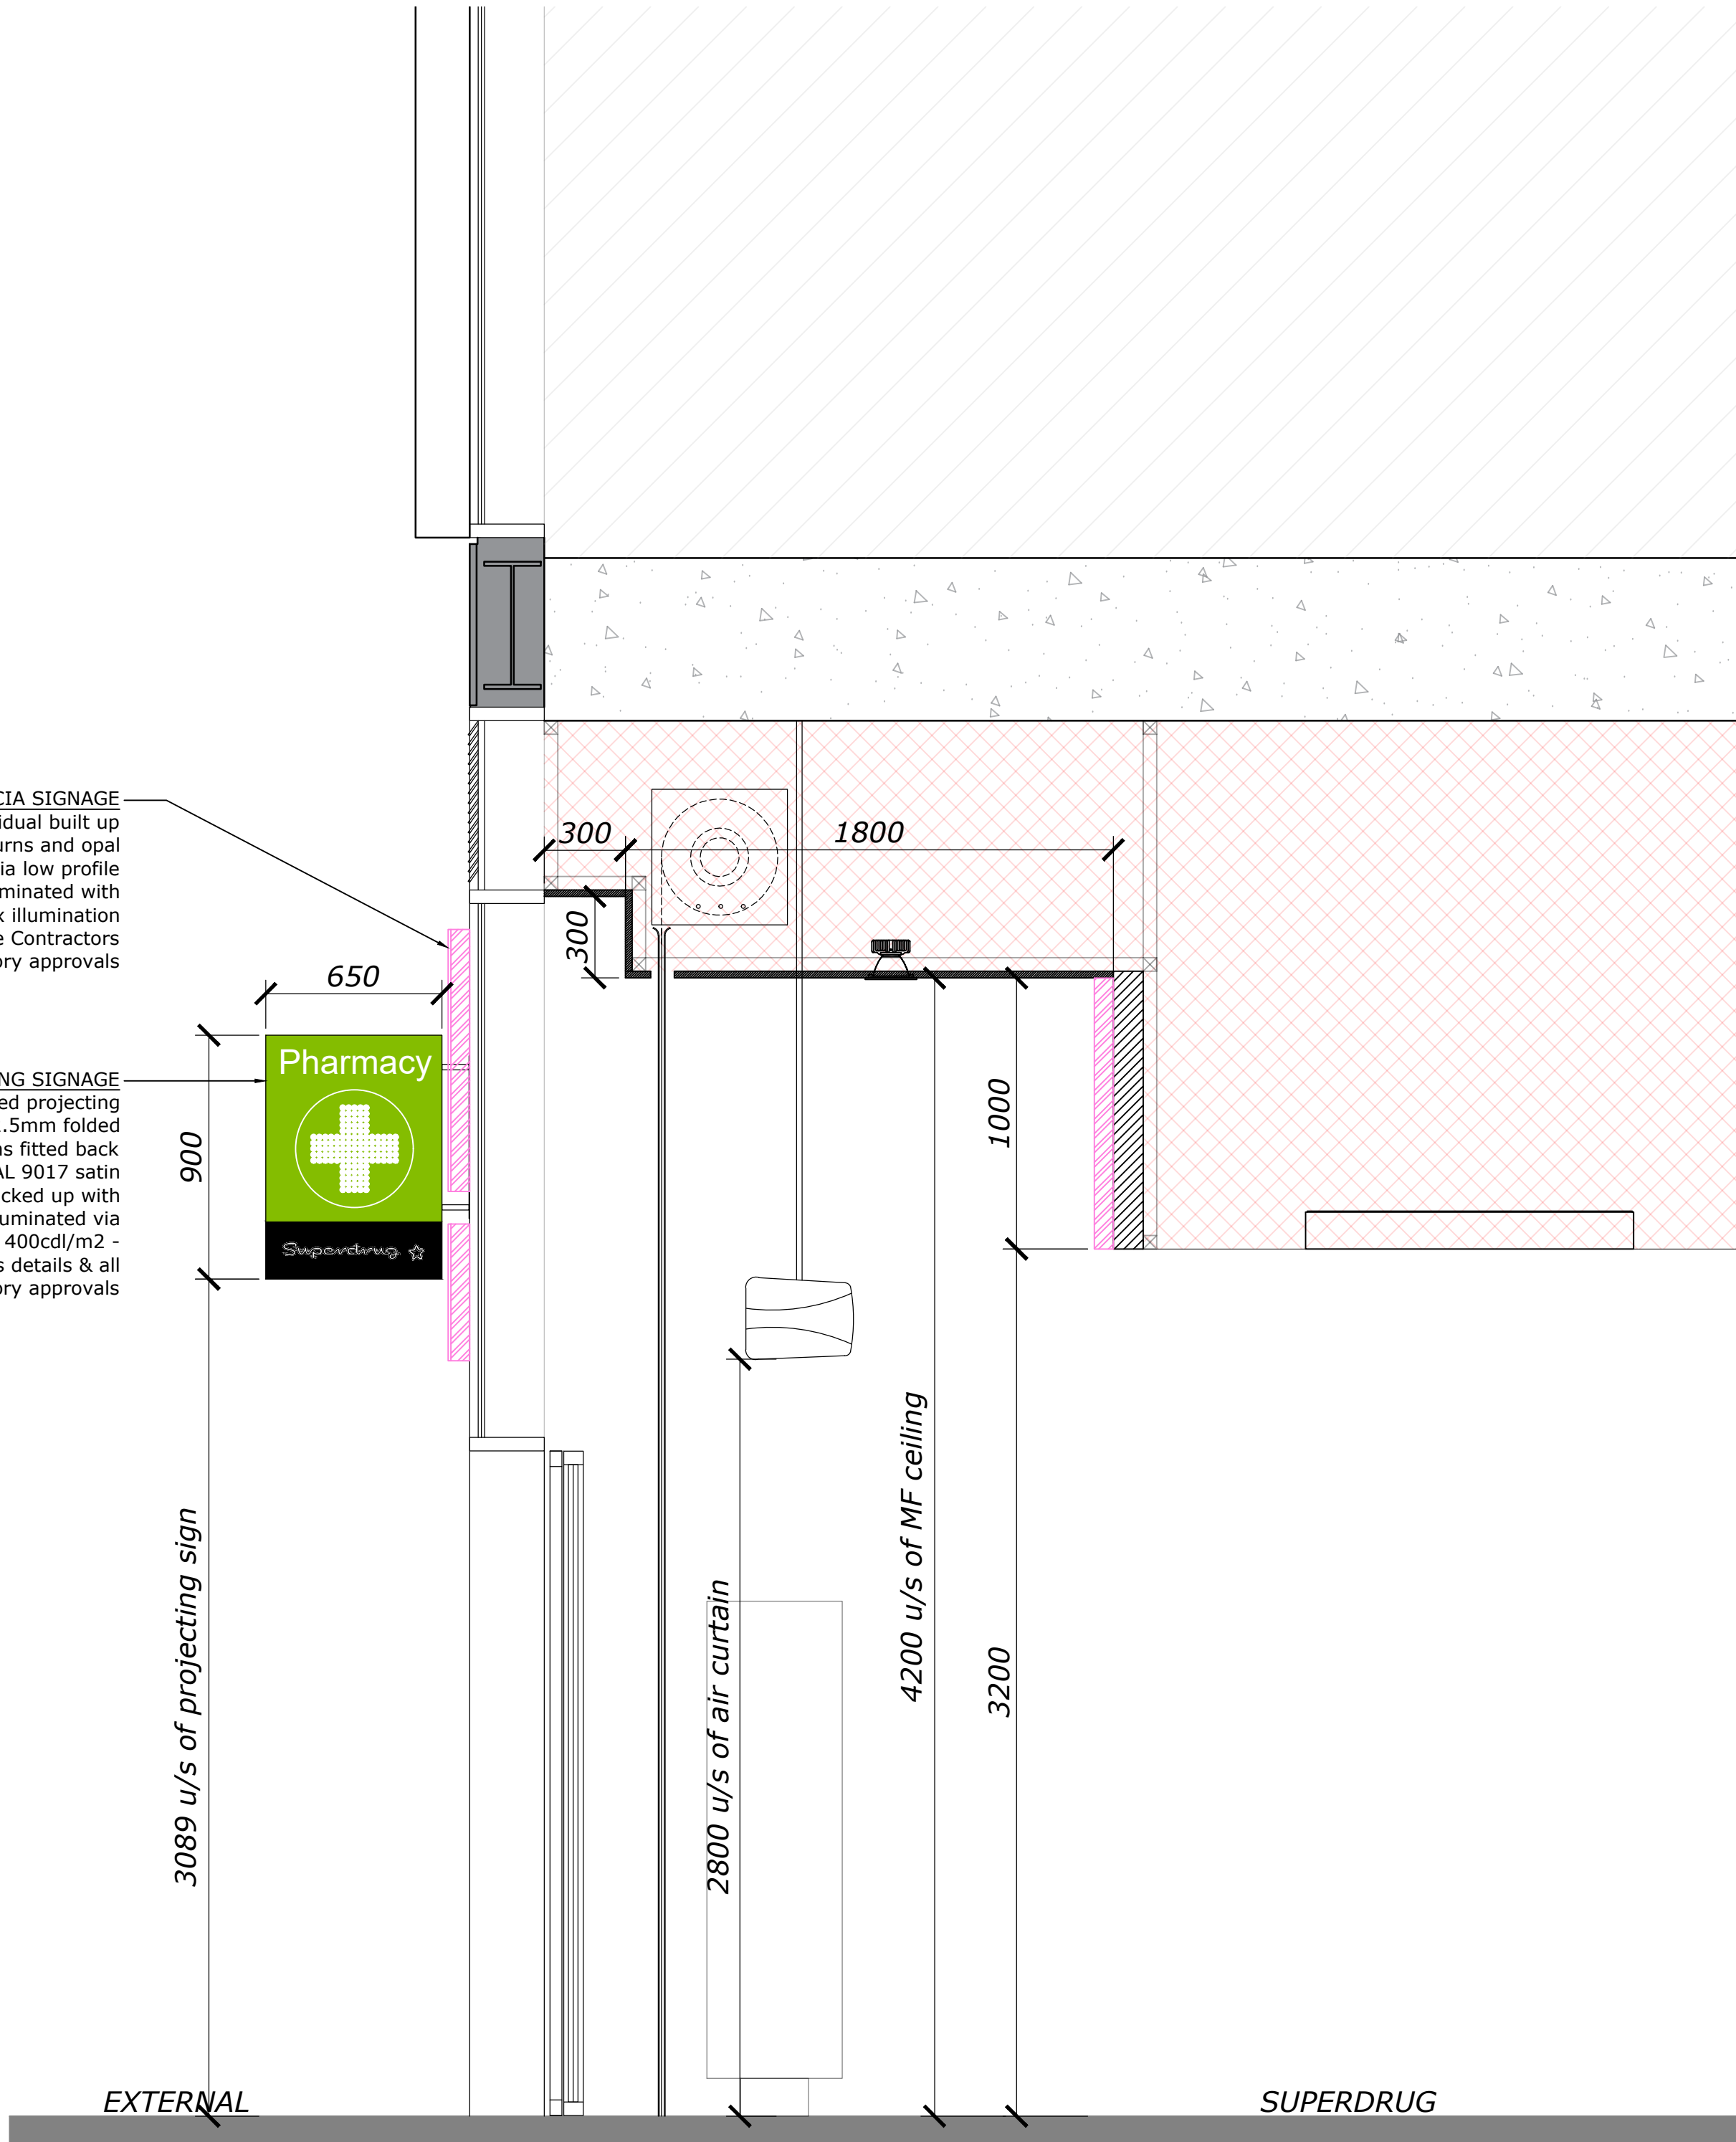

- The contractor must verify all dimensions on site before any works are undertaken, discrepancies are to be reported to the project architect/designer for clarification.
 - All works will be carried out in accordance with the SUPERRIDGE NFOS document & are to comply with the tenants fit out guidelines following landlords approval.
 - HVAC, M&E layouts are indicative & must be verified with the relevant contractor before commencement of work.
 - All works to be carried out in accordance with the fire strategy and fire cert application schedule produced by the landlord team issued at tender.
 - The existing/proposed sprinkler system is to be assessed by building contractor to ensure the system is in compliance with controls regs part B.
- This drawing remains the property of
HVA/TSR/SUPERRIDGE and may not be reproduced in any
way without prior consent.*

SCHEDULE OF RISKS

standard risks and hazards normally associated with the types of work detailed on this drawing, include:

- **Electrocution:** M&E installation/alterations.
- **Working at height:** Falls from scaffolds, platforms & ladders. Falling materials.
- **Noise:** Use of power tools & demolition equipment.
- **Dust:** Use of power tools & demolition equipment.
- **Suffocation:** Fume inhalation from installation/alterations to incoming services, working with hazardous materials/solvents.
- **Trip hazards:** Loose cables & materials.
- **Working in close proximity to the public.**
- **Risks associated with structural works will be assessed** by a structural engineer.
- It is assumed that all works on this drawing will be carried out by a competent contractor working, where appropriate to an approved method statement.

[illegible]

DRAWING TITLE

PROPOSED SHOPFRONT SECTION

CPS 25 048 203 PL

SCALE	DATE
-------	------

1:50 @ A1	07.0
-----------	------

PROJECT

UNIT SU1 & SU2, THE

THE MET CENTRE, CH

BARNSELY. S70 1GW

STATUS ☐

100

100

10/1/2010

Sydenham Road
Sydney
New

00 2EU

2

Super

100

2 Birchwood One
Newhurst Road

Richwood
WARRINGTON
WY 83 7028

0 100 200 300 400 500 600 700 800 900 1000

mail: admin@cubepsl.co.uk
web: www.cubepsl.co.uk
