




# Crofters Medley

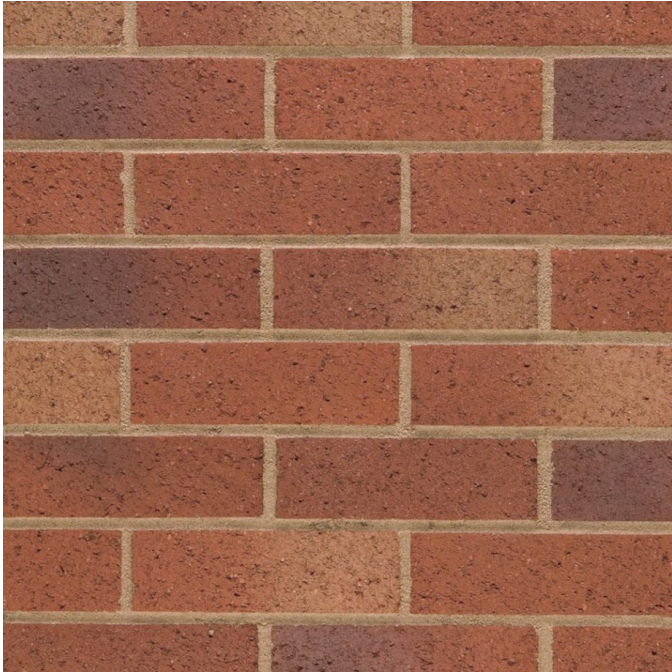

## Technical data

|                                |                                        |
|--------------------------------|----------------------------------------|
| <b>Production Plant</b>        | Denton                                 |
| <b>Production Method</b>       | extruded wirecut                       |
| <b>Pack Quantity</b>           | 400                                    |
| <b>Length x Width x Height</b> | 215 x 102.5 x 65 mm                    |
| <b>Size Tolerance</b>          | T2                                     |
| <b>Range Tolerance</b>         | R1                                     |
| <b>Gross Dry Density</b>       | 1480 kg/m <sup>3</sup>                 |
| <b>Compressive Strength</b>    | $\geq 40$ N/mm <sup>2</sup> (EN 771-1) |

|                        |                                  |
|------------------------|----------------------------------|
| Thermal Conductivity   | 0,690 W/(m·K) (EN 1745:2012: S1) |
| Durability Designation | F2 (EN 771-1)                    |
| Water Absorption       | <=12 % (EN 771-1)                |
| Reaction to Fire       | A1 class                         |
| Active Soluable Salts  | S2                               |



**Find a stockist**

**Have a question?**

The content provided is correct as of date of printing. (Please see top-left corner) Due to the colour constraints of printing processes, the product colour may not be truly represented.