

**External wall construction**

Walls to be constructed in accordance with part A of the building regulations 1991 and shall achieve a U value of 0.27W/m<sup>2</sup> or greater.  
 Walls to be 102mm brickwork, 100mm cavity with full fill cavity bats or better, inner leaf to be constructed from 100mm stralite 7N/mm<sup>2</sup> blocks. to be tied together with approved stainless steel ties spaced at a max of 750mm horizontal cts and 450 vertical cts but at every course at reveals. Ties to existing brickwork to be resin fixed stainless steel at 450mm cts. Finished internal walls with 12.5mm plasterboard applied with dot and dab fixings with an allowance for air void between board and block, and to be finished with 3mm plaster skim. All open cavities to be closed with approved cavity closers.  
 Outer leaf to have weepholes at 1000mm cts to allow for drainage to cavity over damp tray in both leaves and to be positioned a min of 150mm above finished ground level or two leaves of brick and block, mass filled with concrete to 150mm below DPC.  
 Connecting walls to be opened up to allow for a continuous cavity. 225x150mm airbricks @ ground level @ 1.8m cts boxed thro cavity with DPC over.

**Foundations**

To be C15 mass filled concrete to all external walls. Recommended 600 wide and a min 200 deep. Load Bearing internal walls to have foundations 500 wide by 200 deep. All strip foundations to be min 900 below lowest finished ground level unless adjacent to drain or sewers in which they should be lower. All foundations to satisfy D.B.S and be inspected prior to placing concrete.

**Ground Floor Construction**

Ground to be removed down to an acceptable level for inspector. To be then back filled with crushed stone hardcore and compacted in 150mm stages. Stone to be bladed with sand to protect 100mm thick Jablite insulation layed under 1200 gauge visqueen D.P.M. or radon barrier to the satisfaction of D.B.S. to run continuous under the 75mm concrete oversite floor.

**Roof Construction**

50 x 100mm treated wall plate with rafter clips, to be held down with min 1000mm M.S. straps at a min of 1200mm cts. Where applicable truss construction rafters at a max of 600mm cts to be fitted with galv M.S. connectors and to include all diagonal and longitudinal bracing and supplied by specialist manufacturers to BS 5268 part 3 1985.  
 Ceiling joists to be fitted with 100mm glass wool between and 200mm cross layed above joists. To a min U 0.16 W/m<sup>2</sup>. Breathable membrane overlaid over rafters with 25 x 50mm pressure treated battens fixed to carry concrete roofing tiles to match existing. Roof ventilation tray to be fitted to separate insulation and membrane and allow circulation of air, in conjunction with soffit vents to roof space.

**Heating system**

Existing heating system to be extended in to extension and thermostatic valves fitted to existing radiators. All works to be carried out by qualified competent persons.

**Electrical**

All electrical work to be carried out by a qualified and competent electrician, capable of designing, installing, testing and certifying the whole installation.  
 All works to comply with current I.E.E. wiring regulations and Part P building regulations.  
 Ceiling mounted mains power, linked smoke detectors mounted to suite current regs.

**Steelworks**


All steel support lintels and U. Beams to be calculated and approved by both an Engineer and D.B.S prior to installation

**Lintels**


All general lintels to be I.G. type otherwise specified and to be insulation packed to prevent cold bridging. All lintels to be bedded on mortar with a minimum of 150mm bearers on each end. All lintels fitted to a cavity wall to have D.P.C tray with stopped ends and weep holes fitted at not more than 900mm

**Windows and External Doors**

All external doors and windows to be supplied by specialist manufacturers and to achieve a max average U value of 1.8W/m<sup>2</sup>. All windows to be UPVC double glazed with 20mm air gap between panes. With inner pane to be in Pilkington K glass. 8000mm background trickle ventilation to be fitted. Safety glazing to be applied to any critical locations which should include all doors and glazing below 700mm above ground level. All rooms to be provided with window openings to 1/20th of the floor area for purge ventilation. Fire escape windows (750x450 clear opening thro 90 degrees) Floor to opening part of window to be between 800mm -1100mm. To be appropriately installed to D.B.S. requirements at site.

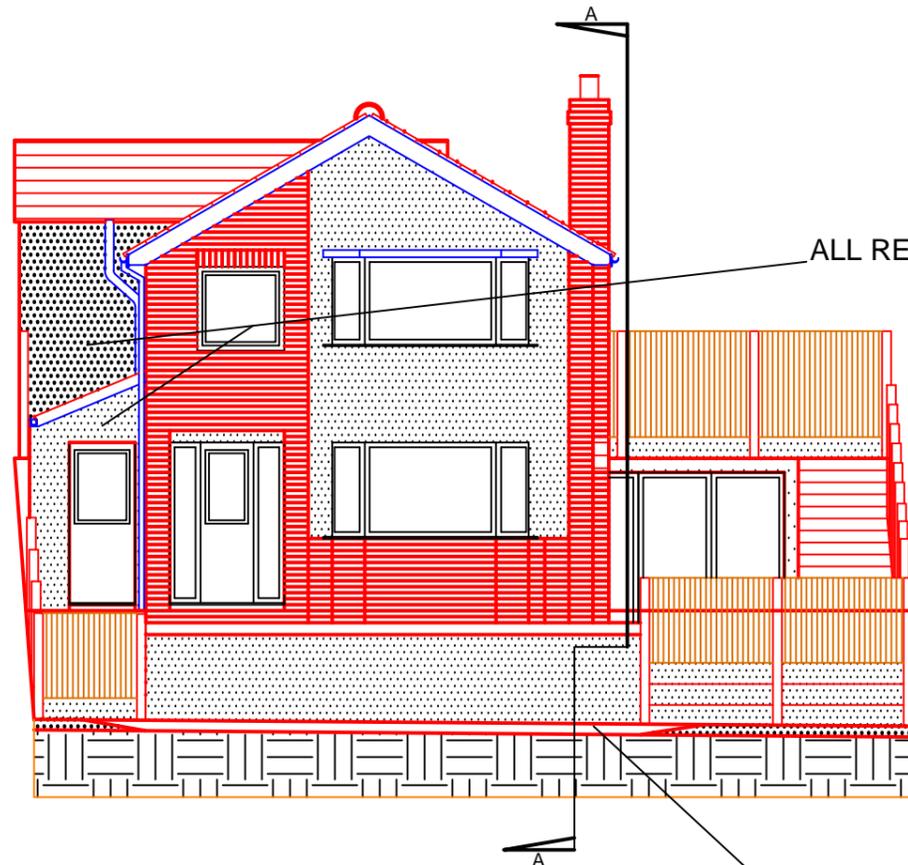

PROPOSED FRONT ELEVATION

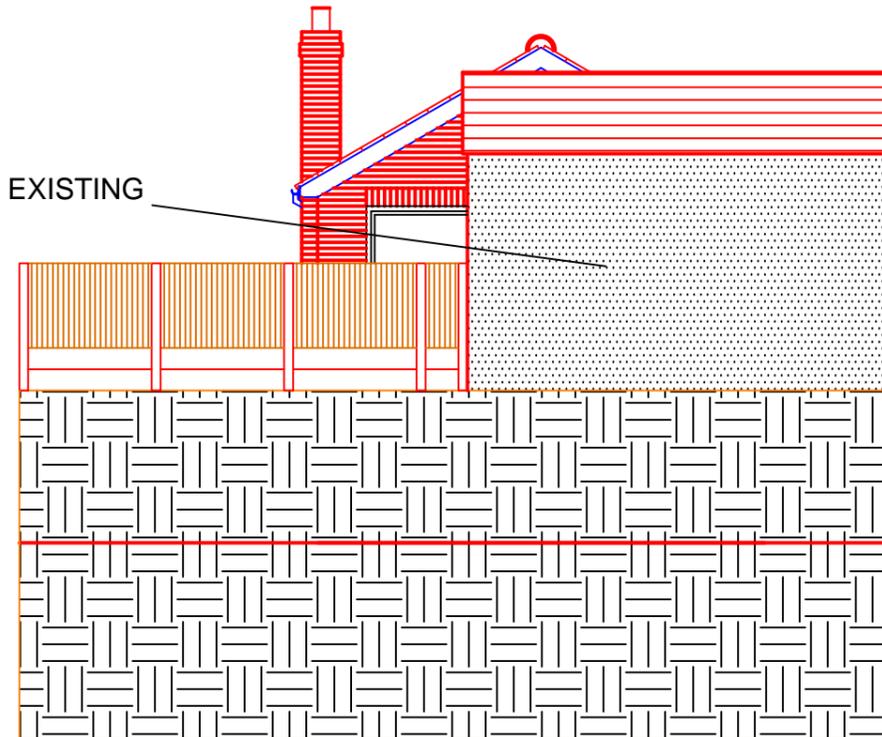

PROPOSED REAR ELEVATION

ALL BOUNDRY FENCING TO BE CONCRETE POST AND GRAVEL BOARD CONSTRUCTION WITH WOOD PANEL INFILL

**N. COOK**

34 Sunnybank Drive,  
 Cusworth,  
 Barnsley, S72 8JG.  
 Tel: 01226 714603  
 Mob: 07930255465  
 neilcookeng@btinternet.com

Architectural Design and Planning Consultants

SCALE	DATE	DRAWN
	25072025	
DRAWING No	REV	
25072025NCDG	001	