


Trees To Be Removed			
Tree Reference	Species	Category	
T003	Cherry	C2	Removed for Construction.
T004	Cherry	C2	Removed for Construction.
T005	Cherry	C2	Removed for Construction
T006	Swedish Whitebeam	C2	Removed for Construction
T014	Cherry	B1,2	Removed for Construction
G012	Elder > 10, Field maple x2, Cherry >10	C2	Removed for Construction
T016	Goat Willow	C2	Removed for Construction
T017	Black Pine	B1	Removed for Construction
T020	Swedish Whitebeam	B1	Removed for Construction
T021	Swedish Whitebeam	B1	Removed for Construction
T022	Cherry	C2	Removed for Construction
T023	Cherry	C2	Removed for Construction
T024	Cherry	C2	Removed for Construction
T025	Cherry	C2	Removed for Construction
T026	Swedish Whitebeam	C2	Removed for Construction
T027	Swedish Whitebeam	C2	Removed for Construction
T028	Swedish Whitebeam	C1,2	Removed for Construction
T029	Swedish Whitebeam	B1,2	Removed for Construction
T030	Cherry	B1,2	Removed for Construction
T031	Cherry	B1,2	Removed for Construction
T032	Cherry	C2	Removed for Construction
T052	Rowan	C1	Removed for Construction
T053	Rowan	C1	Removed for Construction
T062	Swedish Whitebeam	C1	Removed for Construction
T063	Swedish Whitebeam	C1	Removed for Construction
T064	Rowan	C1	Removed for Construction
T065	Cherry	C1	Removed for Construction
T066	Swedish Whitebeam	B1	Removed for Construction
T067	Rowan	C1	Removed for Construction
T068	Swedish Whitebeam	C1	Removed for Construction
T069	Swedish Whitebeam	B1	Removed for Construction
T070	Cherry	C2	Removed for Construction
T071	Swedish Whitebeam	C1	Removed for Construction
T072	Swedish Whitebeam	C1	Removed for Construction
T073	Hornbeam	C1	Removed for Construction
T074	Cherry	C2	Removed for Construction
T077	Swedish Whitebeam	B1	Removed for Construction
G078	Elder > 10, Hawthorn x4	C2	Removed for Construction
G082	Elder > 10, Hazel>10	C2	Removed for Construction
G086	Sycamore x2, Silver Birch x3	B1,2	Removed for Construction
T111	Pedunculate Oak	C1	Removed for Construction
T112	Goat Willow	B1	Removed for Construction

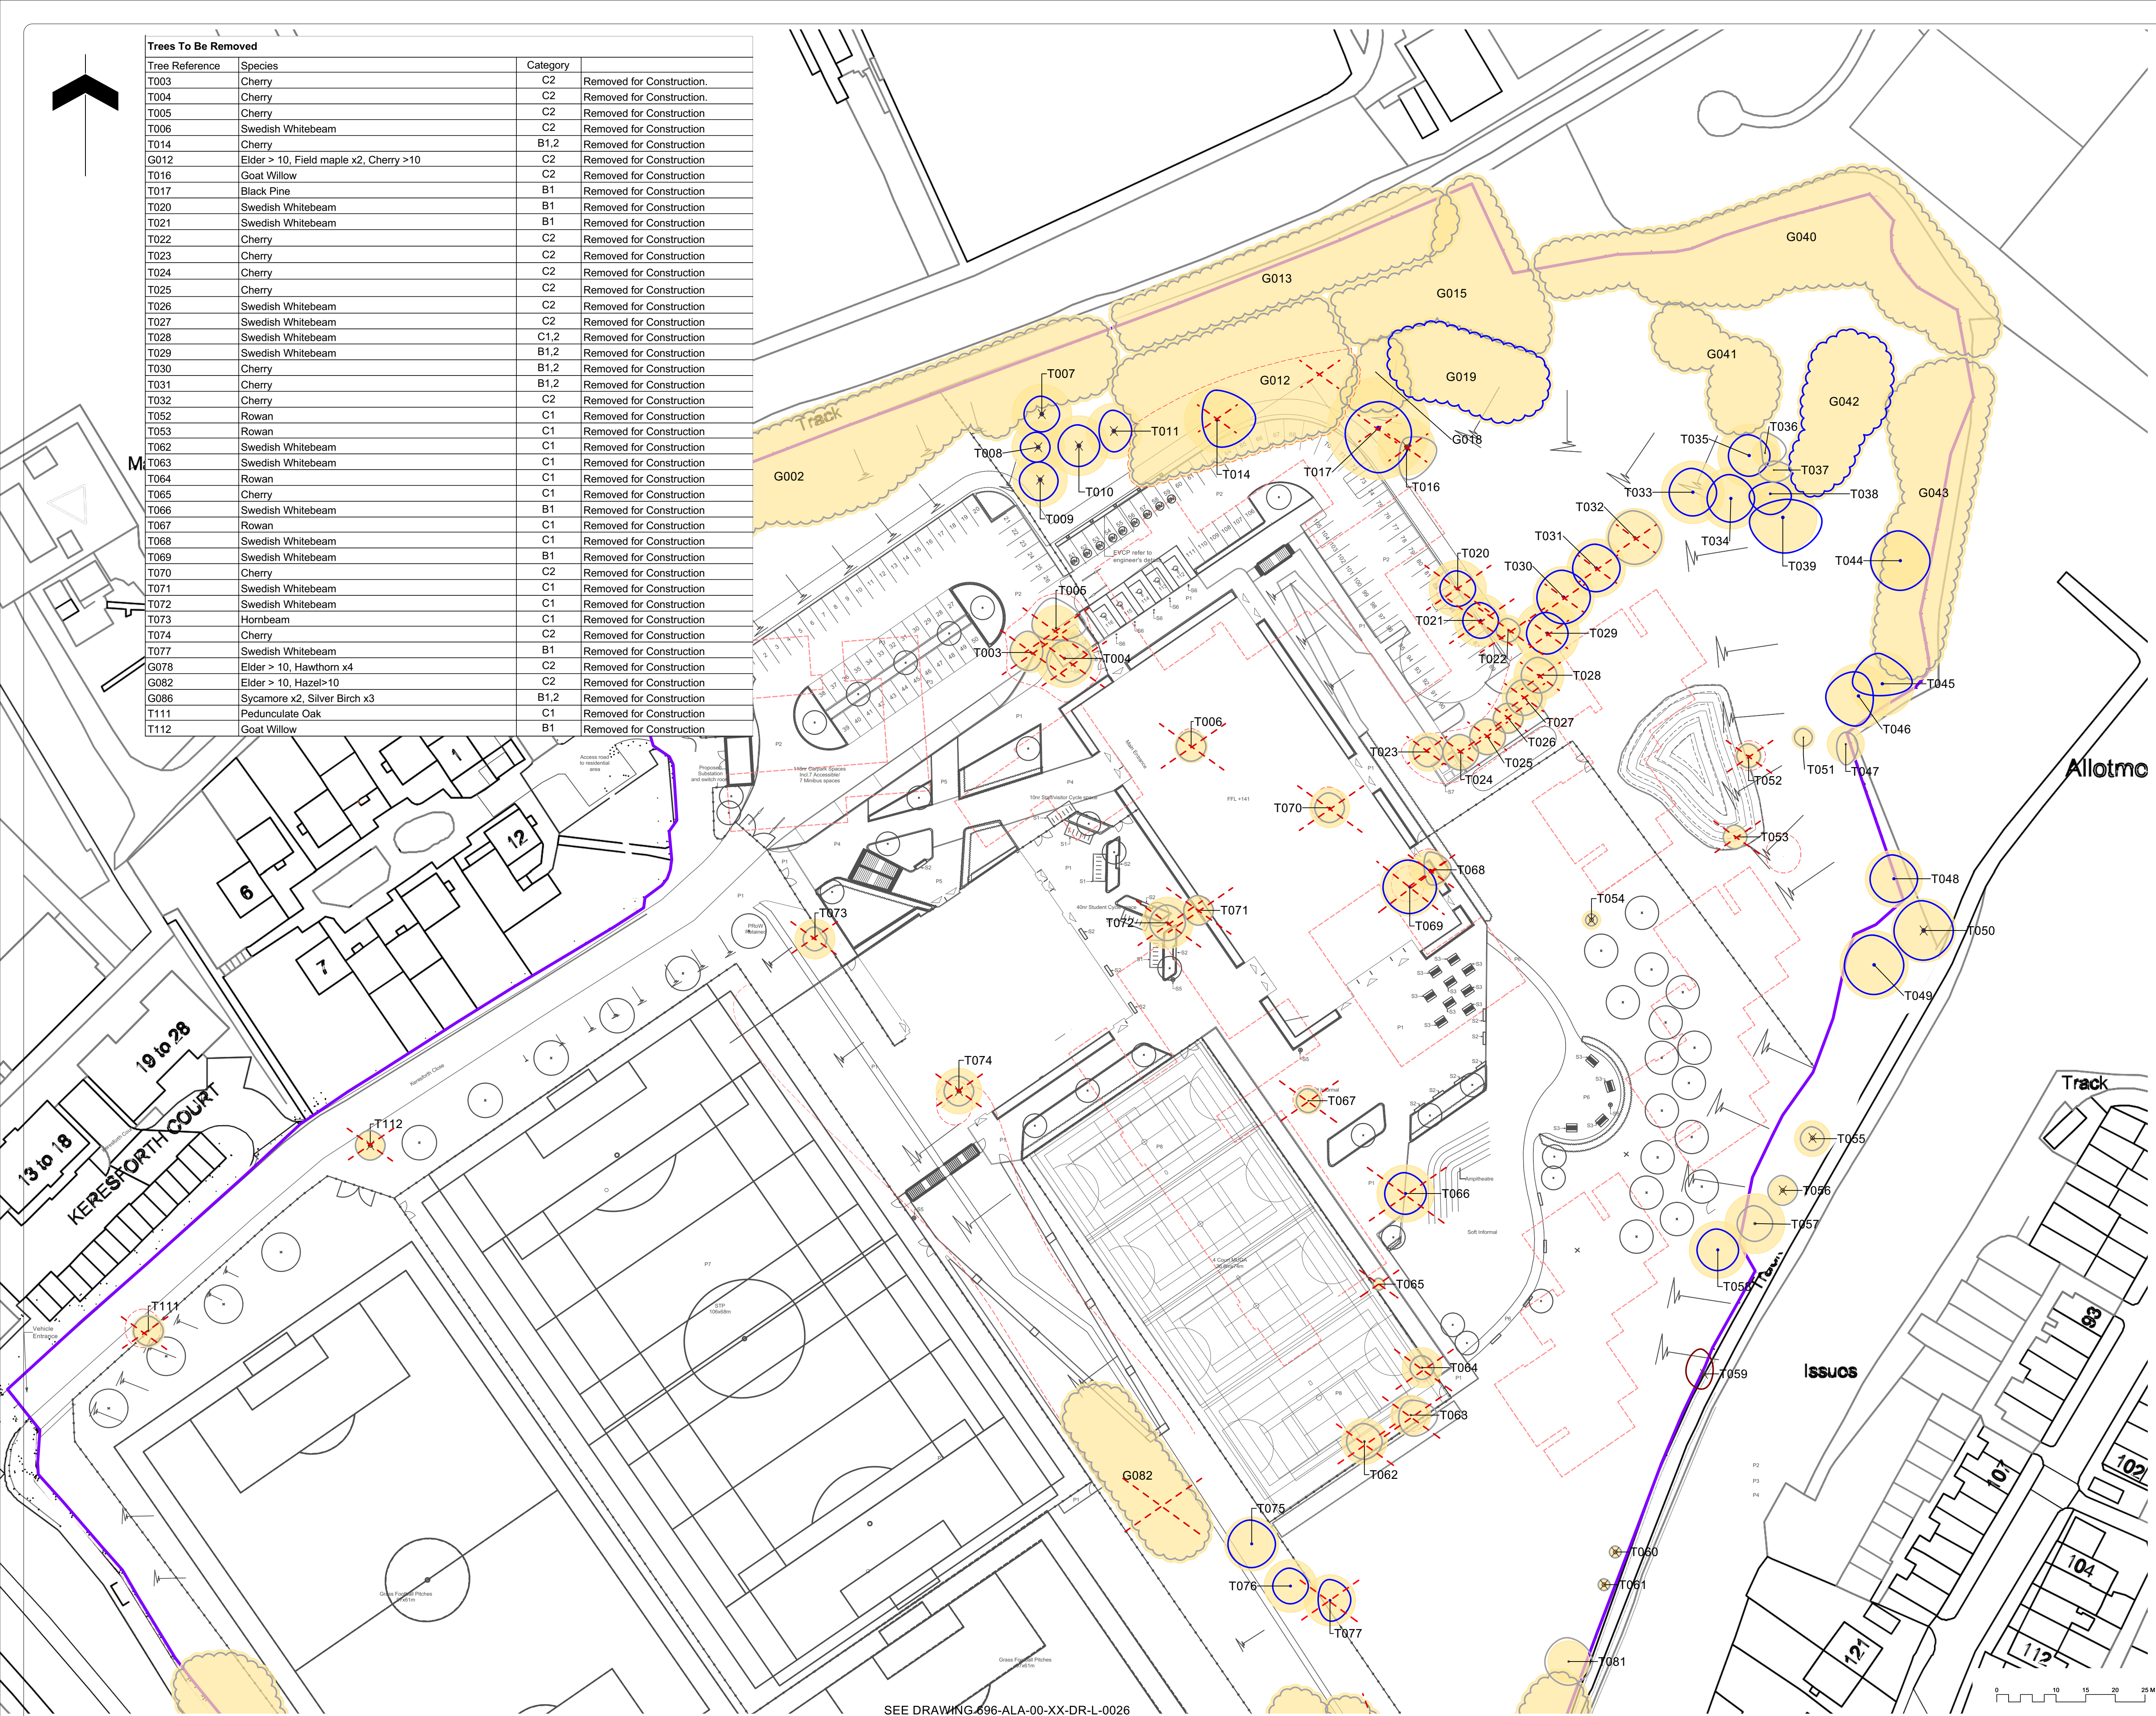

- Note**
1. Do not scale from this drawing
 2. To be read in conjunction with Project Risk Register REF: XXX
 3. To be read in conjunction with all other Landscape Architect's drawings

KEY

TREE REMOVAL KEY

As shown in Preliminary Arboricultural Impact Assessment. (Please refer to BS 5837: 2012 Preliminary Tree Survey Report prepared by Waterman Arboricultural Consultants)

Vegetation removal is recommended outside of the main breeding season (October – February) it is recommended that supervised checks are carried out prior to tree removal by a suitably qualified ecologist.

Contract Boundary
Extent of Works

Trees To Be Retained

T001 Tree Identification Number

Category A - High Value Retention Most Desirable
Category B - Moderate Value Retention Desirable
Category C - Lower Value Could Be Retained
Category U - Recommended to be removed for sound Arboricultural Management

Trees To Be Removed
Tree to be removed as a result of construction
Tree Root Protection Area (RPA)
Indicative design only, to be delivered by others

ID	RISK	MITIGATION	DATE MITIGATED
RESIDUAL PROJECT RISKS			

DATE	REV	DESCRIPTION OF REVISION	DRAWN BY	APPROVED BY
16/02/2022	P02	Issued for Draft CPs	PH	LA
REVISIONS				

STATUS
S2 - FINAL CPs

ares
LANDSCAPE ARCHITECTS

Ares Landscape Architects LTD
Gatecrasher,
51 Eyre Lane
Sheffield
S1 4RS
t: 0114 276 2000
e: hello@aresdesign.co.uk
w: ares.eu.com

CLIENT:
BOWMER + KIRKLAND

PROJECT TITLE:
**TRINITY ACADEMY ST EDWARDS
BARNSELEY**

DRAWING TITLE:
Tree Retention and Removal Plan 1 of 2

DRAWING SCALE: 1:500	DRAWN BY: PH	DRAWN DATE: 17/09/2021
PAPER SIZE: A1	APPROVED BY: RA	ALA PROJECT CODE: ALA696

DRAWING NUMBER: FS0954-ALA-XX-ZZ-DR-L-0025S2	STATUS: P02	REVISION:
--	-----------------------	-----------